



MAKING A WORLD OF DIFFERENCE



India's First And Only Tyre Superbrand.



Ranked no 1 in Customer Satisfaction by JD Power Asia Pacific study 2015



Awarded Brand of the year 2015 by World Branding Forum, London




CORPORATE OFFICE

3, Bahadur Shah Zafar Marg, Patriot House, New Delhi - 110002 Ph: +91 11 33001112, 33001122, Fax No. +91 11 41509800/23322059

www.jktyre.com; Email: internationalbusiness@jkmail.com

www.jktyre.com | Follow us on: /JKTyre /JKTyreCorporate /jktyrecorporate /+JKTyreCorporate

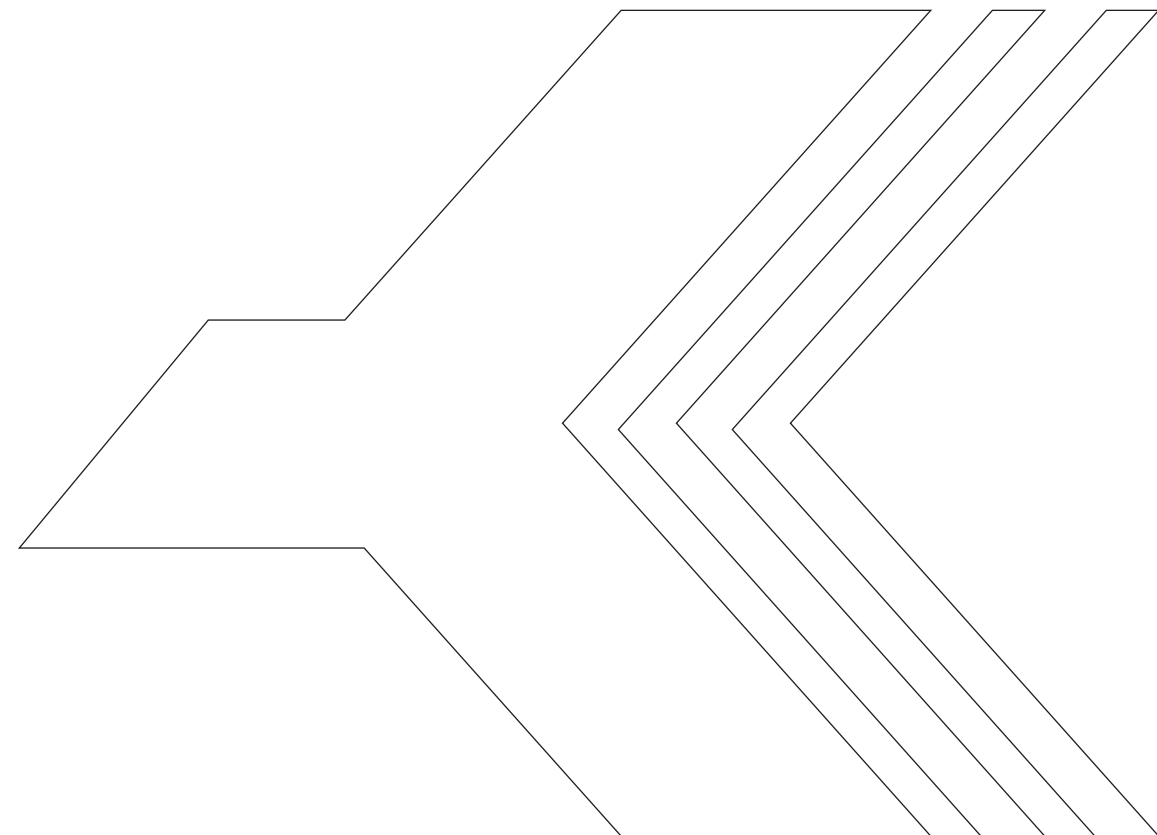


CONTENT

Truck/Bus Radial Tyre - India	4 - 23
Light Truck Tyre	24 - 37
Passenger Car Radial Tyre	38 - 55
Truck/Bus Bias Tyre	56 - 76
OTR/Mining Tyre	77 - 91
Industrial OTR Tyre	92 - 99
Farm Tyre	100- 110




TRUCK/BUS RADIAL TYRES





"A journey of a thousand miles
always ends with a smile. Thank
you JK Tyre for your partnership."

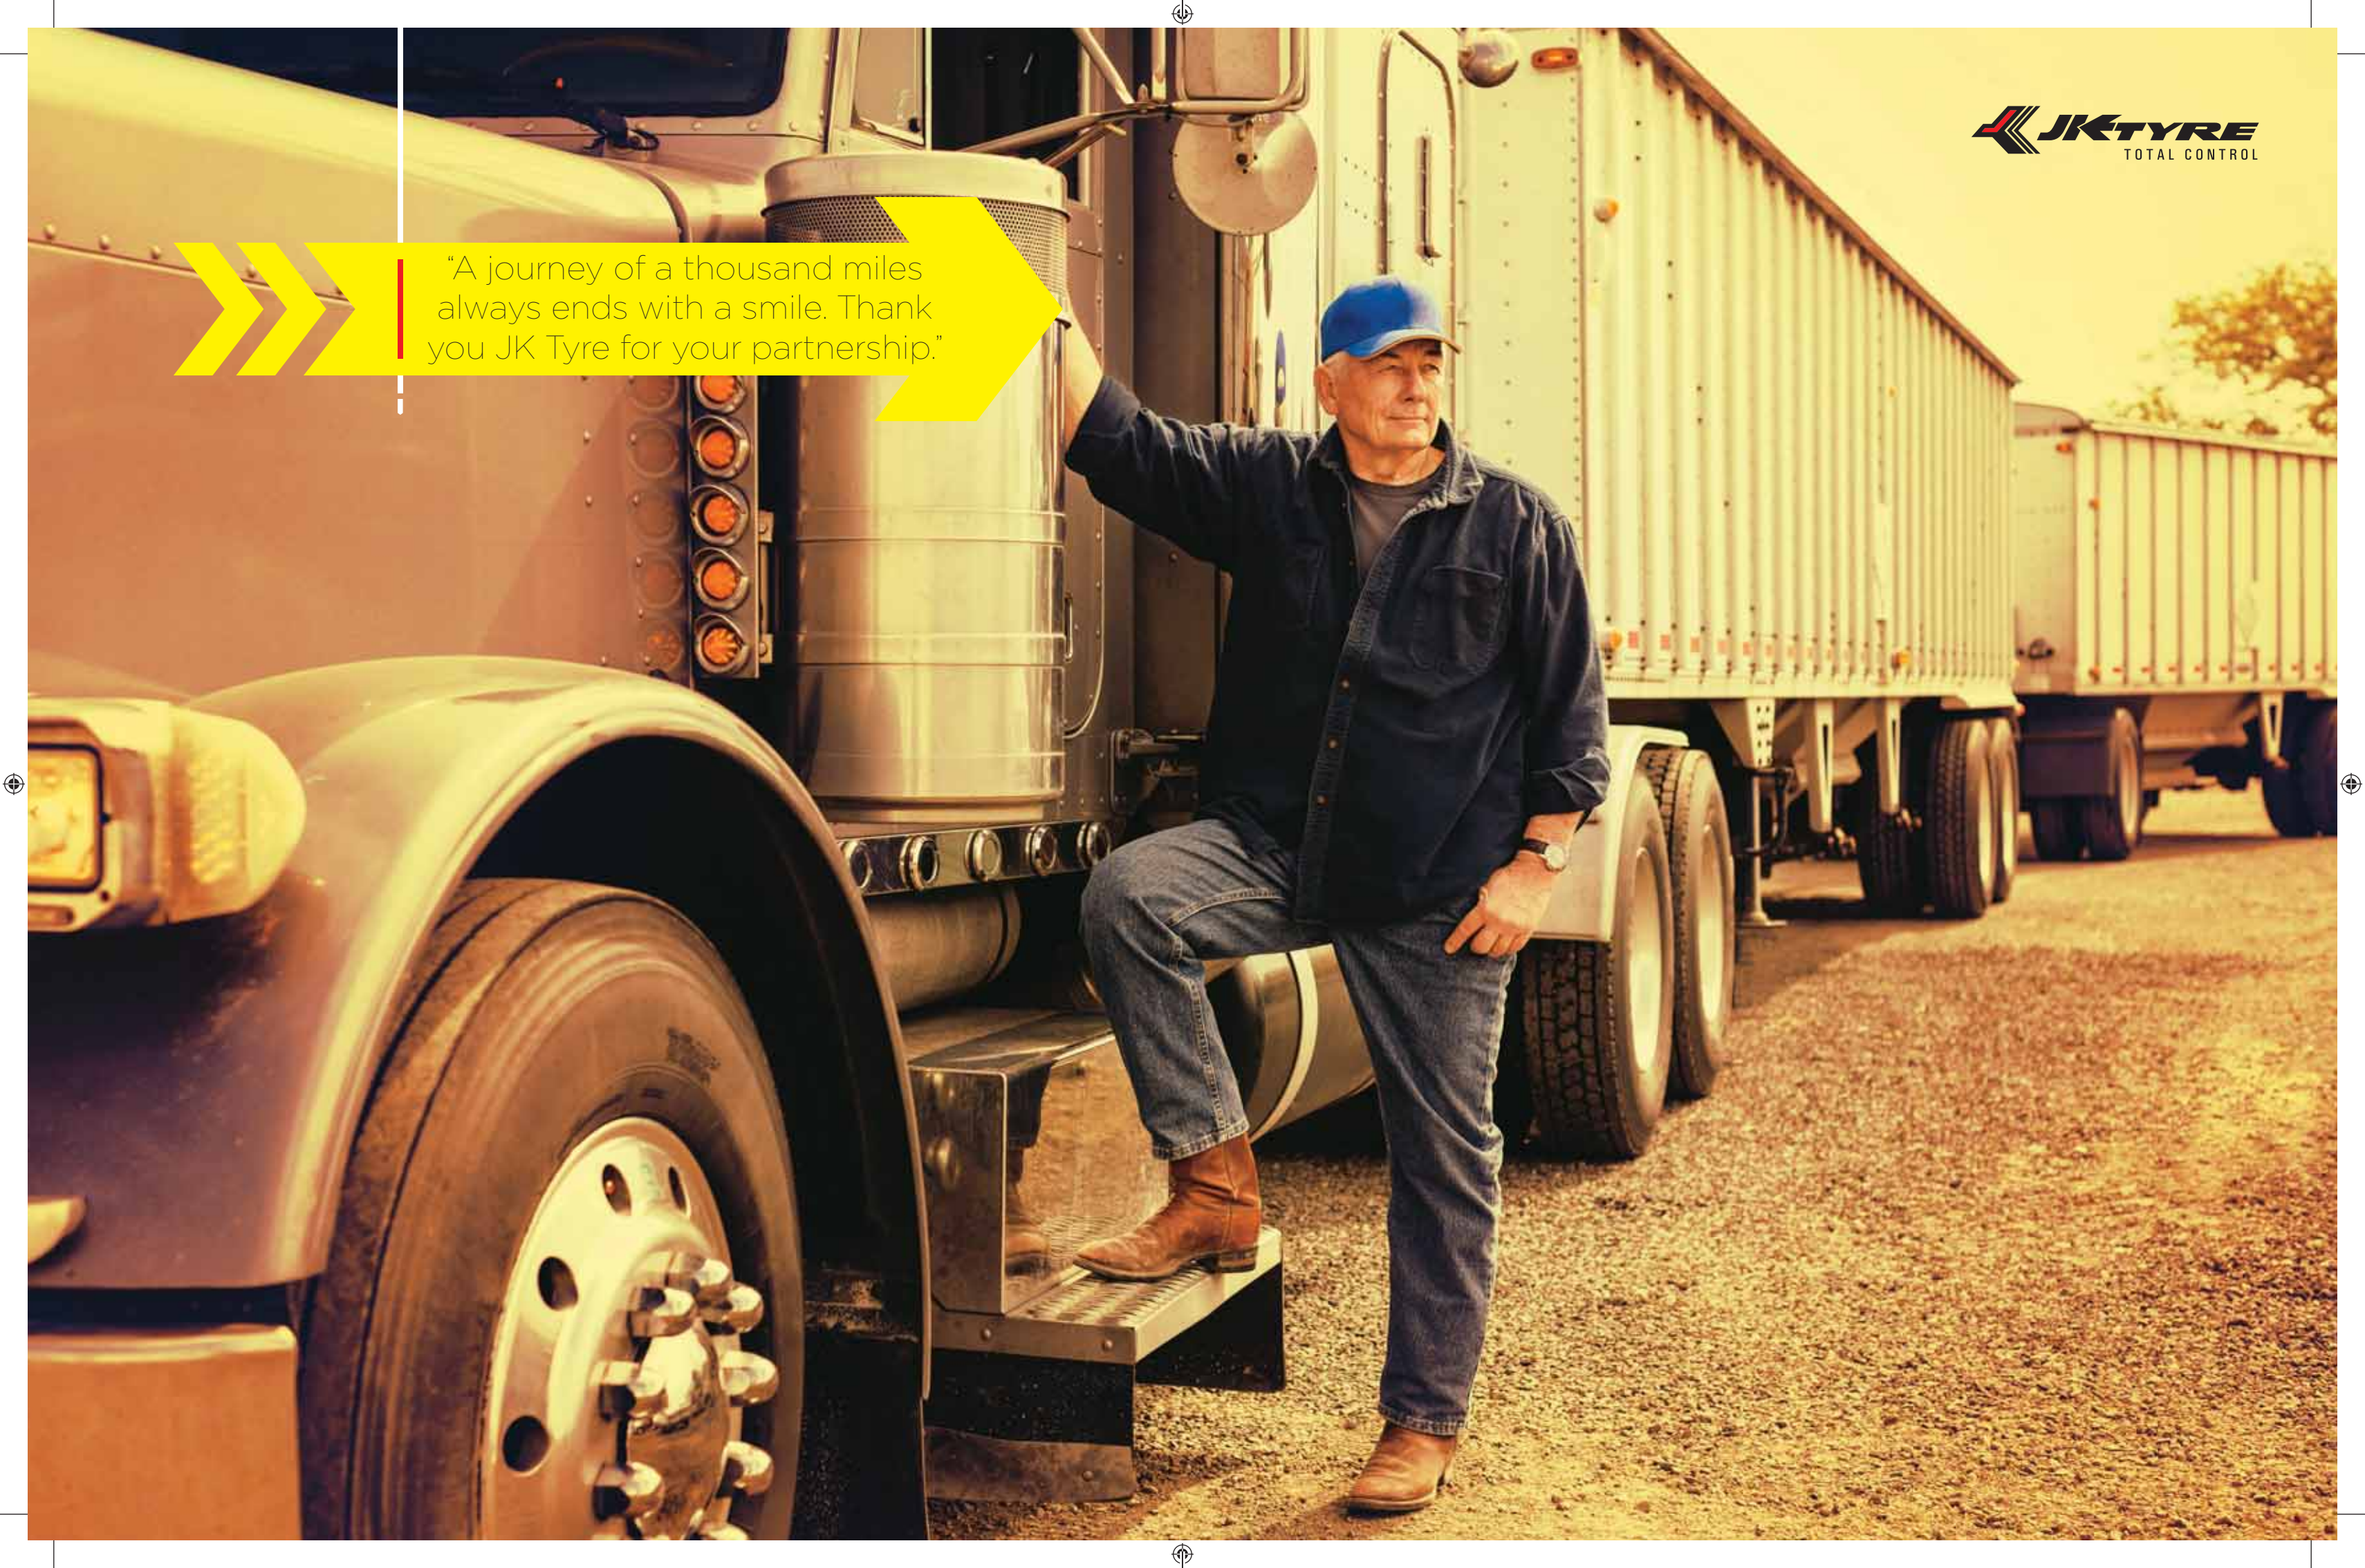



JETWAY JUL

Low Rolling Resistance And High Fuel Saving

SALIENT FEATURES

- 5 zig-zag rib design
- Wider shoulders
- Special stone ejectors
- Low Rolling Resistance
- Special tread compound

BENEFITS

- Better traction
- Uniform wear
- Ease of ejection of stones from the grooves
- Maximum fuel saving
- High wear resistance



AVAILABLE SIZES:
295/80 R 22.5 (16 PR)

JETWAY JUL2/JUL2+

Good Mileage For Steer Axles and Highway Applications

SALIENT FEATURES

- 5 straight rib design
- Wider shoulders
- Sipes on main ribs
- Low rolling resistance and superior tread compound

BENEFITS


- Directional stability and high heat dissipation
- Uniform wear during turning and cornering
- Proper pressure distribution resulting in even wear
- Maximum fuel saving and high wear resistance



AVAILABLE SIZES:
12R22.5 (16PR), 275/80R22.5 (16PR)



AVAILABLE SIZES:
295/75R22.5 (14PR), 285/75R24.5 (14PR)



JETWAY JUL1

5-Rib Design With Premium Depth, Offers Superior Mileage and High Fuel Saving

SALIENT FEATURES

- 5 straight rib design and wider shoulders
- Diamond-shaped stone ejectors
- Low Rolling Resistance and superior tread compound

BENEFITS

- Direction stability and good heat dissipation
- Uniform wear during turning and cornering
- Ease in ejection of stones due to diamond geometry
- Maximum fuel saving and high wear resistance



AVAILABLE SIZES:
295/80R22.5 (16PR), 315/80R22.5 (18PR)

JETWAY JUX


Offers Superior Directional Stability with Excellent Mileage in City Bus Application

SALIENT FEATURES

- 5 rib and 4 rib design
- Wider shoulders
- Diamond-shape stone ejectors
- Low rolling resistance and superior tread compound

BENEFITS

- Directional stability and good heat dissipation
- Uniform wear during turning and cornering
- Ease in ejection of stone due to diamond geometry
- Maximum fuel saving and high wear resistance

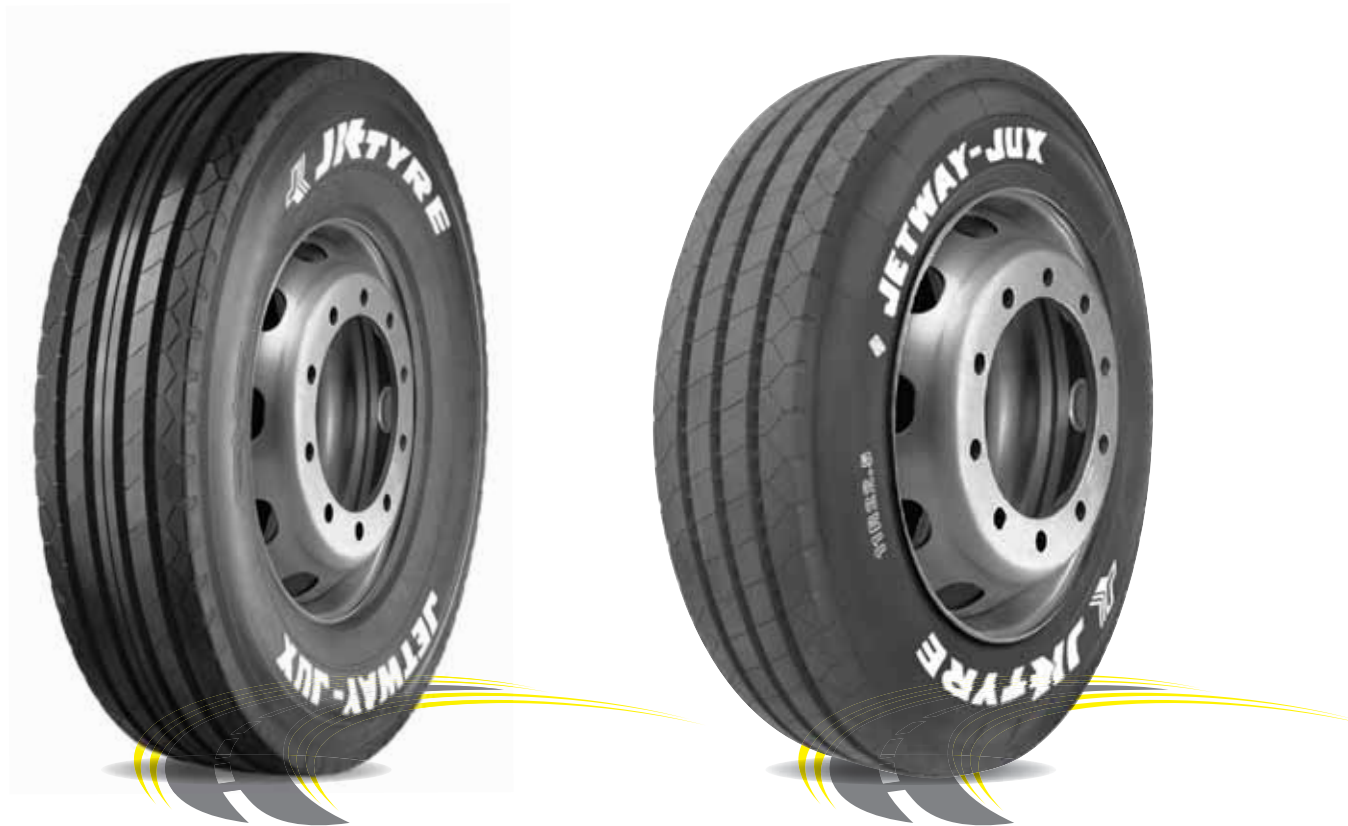

AVAILABLE SIZES:
295/80R22.5 (16PR)

AVAILABLE SIZES:
10.00R20 (16PR), 11R22.5 (16PR)



JETWAY JTH



Multiple Retreads And Fuel Saving- Normal Loads For Trailers

SALIENT FEATURES

- Wider crown and shoulder ribs
- Unique stone ejection design
- Construction design

BENEFITS

- High direction stability and uniform wear
- Less stone entrapment
- High retread factors
- Low rolling resistance



AVAILABLE SIZES:
10.00R20 (16PR), 11.00R20 (16PR)

JETWAY JTH 1



High Mileage With Extended Casing Life- Normal Loads For Trailers

SALIENT FEATURES

- Precise balance of compound and tread geometry
- Innovative tread pattern
- Circumferential grooves with 5 ribs
- Innovative groove technology

BENEFITS

- High mileage
- Increased stability and reduced noise
- Low rolling resistance
- Minimum stone retention, extending casing life



AVAILABLE SIZES:
11R22.5 (16PR), 255/70R22.5 (New), 275/70R22.5 (New)



JETWAY JUH


Wider Shoulder Design And High Mileage

SALIENT FEATURES

- 4 Rib design
- Wider shoulders
- Twisted grooves geometry
- Unique pattern design

BENEFITS

- Uniform pressure distribution
- Improved shoulder wear
- Less stone entrapment
- Reduced erosion wear
- Uniform wear



AVAILABLE SIZES:

12.00R20 (18PR), 11R22.5 (16PR), 11R24.5 (16PR)



JETWAY-JUH3+

High Fuel Efficiency and Multiple retreads for Moderate Load

SALIENT FEATURES

- Wider shoulder ribs
- Twisted geometry
- Unique groove design
- Rolling resistance and superior tread compound

BENEFITS

- Uniform wear during turning and cornering
- Better directional stability
- Excellent heat dissipation
- Maximum fuel saving and high wear resistance



AVAILABLE SIZES:

8.25R20 (14PR)/(16PR), 10.00R20 (16PR)



JETWAY JUH3

Uniform Pattern Design Offering Low Rolling Resistance

SALIENT FEATURES

- Wider shoulders
- Pyramidal grooves design
- Unique pattern design
- Superior tread compound

BENEFITS

- Improved shoulder wear
- Less stone entrapment
- Uniform wear with reduced erosion wear
- Uniform pressure distribution
- High mileage and resistance to vehicle irregularities



AVAILABLE SIZES:

9.00R20 (14PR)/(16PR), 10.00R20 (16PR), 11.00R20 (16PR)



JETWAY JUH4

High Mileage In Long Haul Applications

SALIENT FEATURES

- Wider shoulder ribs
- Twisted geometry
- Unique groove design
- Rolling resistance
- Superior tread compound

BENEFITS

- Uniform wear during turning and cornering
- Better directional stability
- Excellent heat dissipation
- Maximum fuel saving
- High Wear Resistant



AVAILABLE SIZES:

10.00R20 (16PR), 11.00R20 (16PR), 11.00R22 (16PR)



JETWAY JUC

All-Wheel Application And Good Mileage

SALIENT FEATURES

- Optimized land sea distribution
- Conventional radial semi-lug pattern
- Long pitches with slight bends and lateral grooves
- Optimum under tread rubber

BENEFITS

- Good mileage with smooth wear
- Premium performance on radial tyres on all wheels
- Aggressive looks with smooth wear on radial tyres
- Multiple retreads



AVAILABLE SIZES:

11R22.5 (16PR)



JETWAY JUC3

Offers Good Mileage In All-Wheel Position

SALIENT FEATURES

- Rugged pattern design
- Wider crown and shoulder ribs
- Zig-zag groove geometry
- Open buttress design and scooped notch at shoulder
- Flexed rib support between ribs

BENEFITS

- Better traction
- High directional stability and uniform tread wear
- No stone entrapment
- Reduced heat development at shoulder
- Helps in circumferential flexing of ribs



AVAILABLE SIZES:

10.00R20 (16PR), 11.00R20 (16PR), 12R22.5 (16PR), 315/80R22.5 (18PR)



JETWAY JUC2

Sturdy All-Rounder For An All-Round Performance

SALIENT FEATURES

- 4 rib design
- Wider lateral grooves
- Wider crown and shoulder ribs
- Unique groove geometry
- Superior tread compound

BENEFITS

- Better traction
- High directional stability and uniform tread wear
- No stone entrapment
- Higher retread
- Superb structural durability



AVAILABLE SIZES:

9.00R20 (14PR), 10.00R20 (16PR), 11.00R20 (16PR)



JETSTEEL JDC

Robust Tyre For Tough Applications

SALIENT FEATURES

- Block-type lug design
- Open shoulders
- Solid tie bars
- Open grooves
- Higher tread depth

BENEFITS

- Better traction in off-road application
- Enhanced traction
- Strong block rigidity
- Runs cooler
- Higher mileage



AVAILABLE SIZES:

12.00R20 (18PR), 11R22.5 (16PR), 13R22.5 (18PR)



JETSTEEL-JDC 3


High Cut Resistance - Construction Application

SALIENT FEATURES

- Robust directional tread blocks
- Open shoulder design
- Solid tie bars in between blocks
- Open lateral grooves

BENEFITS

- Better vehicle handling
- Excellent traction in both On/Off-road conditions
- Extra traction in Off-The-Road conditions
- Extra strength and block rigidity
- Helps in lower heat generation



AVAILABLE SIZES:

10.00R20 (16PR), 11.00R20 (16PR), 12R22.5 (16PR), 315/80R22.5 (18PR)



JETSTEEL JDL2

Good Mileage With Added Traction And Grip

SALIENT FEATURES

- Extra rubber in centre with unique hexagonal "honeycomb" design
- Open shoulder groove with many ducts in shoulder
- Excellent part worn appearance
- Optimized block size
- Special tread compound

BENEFITS

- Very good mileage with added traction and grip
- Runs cooler at high speed for longer duration
- Provide excellent traction every time
- High durability and wear resistance



AVAILABLE SIZES:

295/75R22.5 (14PR), 285/75R22.5 (14PR)



JETSTEEL JDL

Good Mileage With Added Traction And Grip

SALIENT FEATURES

- Extra rubber in centre with unique hexagonal "honeycomb" design
- Open shoulder groove with many ducts in shoulder
- Excellent part worn appearance
- Optimized block size
- Special tread compound

BENEFITS

- Very good mileage with added traction and grip
- Runs cooler at high speed for longer duration
- Provides excellent traction every time
- High durability and wear resistance



AVAILABLE SIZES:

10.00R20 (16PR), 275/80R22.5 (16PR), 295/80R22.5 (16PR)



JETSTEEL JDH

Offers Excellent Mileage & Performance On Drive Axle

SALIENT FEATURES

- 3 Groove block design
- Wider lateral grooves
- Wider crown and shoulder blocks
- Solid block design

BENEFITS

- Uniform pressure distribution
- Better traction and braking properties
- High directional stability and even/smooth wear
- Excellent mileage at recommended loads
- Excellent performance on drive axle



AVAILABLE SIZES:

9.00R20 (14PR), 10.00R20 (16PR), 11.00R20 (16PR), 11R22.5 (16PR), 11R24.5 (16PR)



JETSTEEL JDH3

Extra Mileage And Multiple Retreads - Moderate Load

SALIENT FEATURES

- Robust directional tread blocks
- Open shoulder design
- Solid tie-bars between blocks
- Open lateral grooves

BENEFITS

- Better vehicle handling
- Excellent traction in both On/Off-road conditions
- Excellent long lasting casing for longer life and durability
- Extra strength and block rigidity
- Helps in lower heat generation



AVAILABLE SIZES:

8.25R20 (14PR)/(16PR), 10.00R20 (16PR), 11.00R22 (16PR)



JETSTEEL-JDE

Trouble Free Performance - Heavy Load

SALIENT FEATURES

- Large tread blocks
- Wider lateral grooves
- Large air envelope

BENEFITS

- Provides better pressure distribution
- Better traction and braking properties
- Extra load carrying capacity



AVAILABLE SIZES:

8.25R20 (16PR), 10.00R20 (16PR)/(18PR), 11.00R20 (16PR)



JETSTEEL JDH6

Offers Excellent Mileage & Performance On Drive Axle

SALIENT FEATURES

- 6 Block with wide tread arc
- High tread depth
- Wide centre block
- Open shoulder design
- Tread compound

BENEFITS

- Optimized and evenly distributed contact pressure
- Very good tyre life
- Very good ground contact resulting in smooth wear
- Good traction & braking properties, Helps in lower heat generation
- Resistant to cut and chips



AVAILABLE SIZES:

315/80R22.5 (18PR)

TRUCK/BUS RADIAL



JETWAY JUL

SPECIFICATIONS

Size	PR	Rim Size (inch)	Max. Outer Diameter (mm)	Maximum Section Width (mm)	Tread Depth		Speed Index	Load Index	Maximum Load Carrying Capacity			Flap Code
					mm	32nds			Single (Kgs)	Dual (Kgs)	IP (Kpa)	
295/80 R 22.5	16	9.00	1050	293	14.5	18.3	M (130)	152/148	3550	3150	850	NA

JETWAY JUL1

SPECIFICATIONS

Size	PR	Rim Size (inch)	Max. Outer Diameter (mm)	Maximum Section Width (mm)	Tread Depth		Speed Index	Load Index	Maximum Load Carrying Capacity			Flap Code
					mm	32nds			Single (Kgs)	Dual (Kgs)	IP (Kpa)	
295/80 R 22.5	16	9.00	1057	299	15.3	19.3	M (130)	152/148	3550	3150	850	NA
315/80 R 22.5	18	9.00	1078	318	14.8	18.6	M (130)	156/150	4000	3350	850	NA

JETWAY JUL2

SPECIFICATIONS

Size	PR	Rim Size (inch)	Max. Outer Diameter (mm)	Maximum Section Width (mm)	Tread Depth		Speed Index	Load Index	Maximum Load Carrying Capacity			Flap Code
					mm	32nds			Single (Kgs)	Dual (Kgs)	IP (Kpa)	
12 R 22.5	16	9.00	1082	293	16.0	20.2	L (120)	152/148	3350	3075	830	NA
275/80 R 22.5	16	8.25	1028	227	16.0	20.2	L (120)	149/146	3250	3000	830	NA
295/75 R 22.5	14	8.25	1057	291	15.0	18.9	M (130)	144/141	2800	2527	760	NA
285/75 R 24.5	14	9.00	1021	291	14.0	17.6	M (130)	144/141	2800	2527	760	NA

JETWAY JUX

SPECIFICATIONS

Size	PR	Rim Size (inch)	Max. Outer Diameter (mm)	Maximum Section Width (mm)	Tread Depth		Speed Index	Load Index	Maximum Load Carrying Capacity			Flap Code
					mm	32nds			Single (Kgs)	Dual (Kgs)	IP (Kpa)	
1000 R 20	16	7.50	1061	283	17.5	22.0	J (100)	146/143	3000	2725	830	20 N
11 R 22.5	16	8.25	1059	286	17.5	22.0	J (100)	148/145	3000	2725	830	NA
295/80 R 22.5	16	9.00	1063	298	18.5	23.3	J (100)	152/148	3550	3150	850	NA

TRUCK/BUS RADIAL



JETWAY JTH

SPECIFICATIONS

Size	PR	Rim Size (inch)	Max. Outer Diameter (mm)	Maximum Section Width (mm)	Tread Depth		Speed Index	Load Index	Maximum Load Carrying Capacity			Flap Code
					mm	32nds			Single (Kgs)	Dual (Kgs)	IP (Kpa)	
10.00 R 20	16	7.0	1048	283	11.0	13.9	K (110)	146/143	3000	2725	830	20 N
11.00 R 20	16	8.0	1080	295	12.0	15.1	K (110)	150/147	3350	3075	830	20 RR

JETWAY JTH1

SPECIFICATIONS

Size	PR	Rim Size (inch)	Max. Outer Diameter (mm)	Maximum Section Width (mm)	Tread Depth		Speed Index	Load Index	Maximum Load Carrying Capacity			Flap Code
					mm	32nds			Single (Kgs)	Dual (Kgs)	IP (Kpa)	
11R 22.5	16	8.25	1051	287	13	16.4	L (120)	148/145	3150	2900	850	NA

JETWAY JUH

SPECIFICATIONS

Size	PR	Rim Size (inch)	Max. Outer Diameter (mm)	Maximum Section Width (mm)	Tread Depth		Speed Index	Load Index	Maximum Load Carrying Capacity			Flap Code
					mm	32nds			Single (Kgs)	Dual (Kgs)	IP (Kpa)	
11 R 22.5	16	8.25	1053	285	14.0	17.60	K (110)	147/143	3000	2725	830	NA
11 R 24.5	16	8.25	1100	278	14.0	17.64	L (120)	148/144	3250	2725	830	NA
12.00 R 20	18	8.50	1122	323	14.5	18.30	K (110)	154/151	3750	3450	830	20 RR

JETWAY JUH3

SPECIFICATIONS

Size	PR	Rim Size (inch)	Max. Outer Diameter (mm)	Maximum Section Width (mm)	Tread Depth		Speed Index	Load Index	Maximum Load Carrying Capacity			Flap Code
					mm	32nds			Single (Kgs)	Dual (Kgs)	IP (Kpa)	
9.00 R 20	14	7.0	1020	262	13.5	17.0	K (110)	141/139	2575	2430	790	20N
9.00 R 20	16	7.0	1020	262	13.5	17.0	K (110)	142/140	2650	2500	830	20N
10.00 R 20	16	7.5	1054	283	14.0	17.6	K (110)	146/143	3000	2725	830	20N
11.00 R 20	16	8.0	1084	294	14.0	17.6	K (110)	150/147	3350	3075	830	20RR

JETWAY JUH3 +

SPECIFICATIONS

Size	PR	Rim Size (inch)	Max. Outer Diameter (mm)	Maximum Section Width (mm)	Tread Depth		Speed Index	Load Index	Maximum Load Carrying Capacity			Flap Code
					mm	32nds			Single (Kgs)	Dual (Kgs)	IP (Kpa)	
8.25 R 20	14	6.5	968	235	12.0	15.1	K (110)	136/134	2240	2120	830	20M
8.25 R 20	16	6.5	969	235	12.0	15.1	K (110)	137/135	2300	2180	860	20M
10.00 R 20	16	7.5	1054	283	14.0	17.6	K (110)	146/143	3000	2725	830	20N

JETWAY JUH4

SPECIFICATIONS

Size	PR	Rim Size (inch)	Max. Outer Diameter (mm)	Maximum Section Width (mm)	Tread Depth		Speed Index	Load Index	Maximum Load Carrying Capacity			Flap Code
					mm	32nds			Single (Kgs)	Dual (Kgs)	IP (Kpa)	
10.00 R 20	16	7.5	1059	287	16.0	20.2	K (110)	146/143	3000	2725	830	20N
11.00 R 20	16	8.0	1088	301	16.0	20.2	K (110)	150/147	3350	3075	830	20RR
11.00 R 22	16	8.0	1139	297	16.0	20.2	K (110)	152/149	3550	3250	830	22RR

JETWAY JUC

SPECIFICATIONS

Size	PR	Rim Size (inch)	Max. Outer Diameter (mm)	Maximum Section Width (mm)	Tread Depth		Speed Index	Load Index	Maximum Load Carrying Capacity			Flap Code
					mm	32nds			Single (Kgs)	Dual (Kgs)	IP (Kpa)	
11 R 22.5	16	8.25	1057	286	16.5	20.8	L (120)	148/145	3150	2900	850	NA

JETWAY JUC2

SPECIFICATIONS

Size	PR	Rim Size (inch)	Max. Outer Diameter (mm)	Maximum Section Width (mm)	Tread Depth		Speed Index	Load Index	Maximum Load Carrying Capacity			Flap Code
					mm	32nds			Single (Kgs)	Dual (Kgs)	IP (Kpa)	
900 R 20	14	7.0	1025	263	15.8	19.9	K (110)	141/139	2575	2430	790	20 N
1000 R 20	16	7.5	1059	283	17.0	21.4	K (110)	141/140	3000	2725	830	20 N
1100 R 20	16	8.0	1093	294	17.8	22.4	K (110)	150/147	3350	3075	830	20 RR

JETWAY JUC3

SPECIFICATIONS

Size	PR	Rim Size (inch)	Max. Outer Diameter (mm)	Maximum Section Width (mm)	Tread Depth		Speed Index	Load Index	Maximum Load Carrying Capacity			Flap Code
					mm	32nds			Single (Kgs)	Dual (Kgs)	IP (Kpa)	
10.00 R 20	16	7.5	1070	287	18.0	22.7	K (110)	146/143	3000	2725	830	20N
11.00 R 20	16	8.0	1092	301	18.0	22.7	K (110)	150/147	3350	3075	830	20RR
12 R 22.5	16	9.0	1091	303	18.0	22.7	L (120)	152/148	3550	3150	850	NA
315/80 R 22.5	18	9.0	1089	311	18.0	22.7	M (130)	156/150	4000	3350	850	NA

JETSTEEL JDC

SPECIFICATIONS

Size	PR	Rim Size (inch)	Max. Outer Diameter (mm)	Maximum Section Width (mm)	Tread Depth		Speed Index	Load Index	Maximum Load Carrying Capacity			Flap Code
					mm	32nds			Single (Kgs)	Dual (Kgs)	IP (Kpa)	
12 R 20	18	7.50	1132	320	20.8	26.2	G(90)	154/151	3450	3540	830	20 RR
13 R 22.5	18	9.00	1132	327	21	26.5	K(110)	156/150	4000	3350	875	NA
11 R 22.5	16	8.25	1065	285	18.7	23.6	L(120)	148/145	3150	2900	850	NA

JETSTEEL JDC3

SPECIFICATIONS

Size	PR	Rim Size (inch)	Max. Outer Diameter (mm)	Maximum Section Width (mm)	Tread Depth		Speed Index	Load Index	Maximum Load Carrying Capacity			Flap Code
					mm	32nds			Single (Kgs)	Dual (Kgs)	IP (Kpa)	
10.00 R 20	16	7.5	1074	287	20.0	25.2	K (110)	146/143	3000	2725	830	20N
11.00 R 20	16	8.0	1097	301	20.5	25.8	K (110)	150/147	3350	3075	830	20RR
12 R 22.5	16	9.0	1095	305	20.5	25.8	L (120)	152/148	3550	3150	850	NA
315/80 R 22.5	18	9.0	1099	323	22.5	28.3	M (130)	156/150	4000	3350	850	NA

JETSTEEL JDL

SPECIFICATIONS

Size	PR	Rim Size (inch)	Max. Outer Diameter (mm)	Maximum Section Width (mm)	Tread Depth		Speed Index	Load Index	Maximum Load Carrying Capacity			Flap Code
					mm	32nds			Single (Kgs)	Dual (Kgs)	IP (Kpa)	
10.00 R 20	16	7.5	1061	283	18.0	22.7	K (110)	146/143	3000	2725	830	20N
275/80 R 22.5	16	8.25	1041	284	20.0	25.2	L (120)	149/146	3250	3000	850	NA
295/80 R 22.5	16	9.0	1068	297	20.0	25.2	M (130)	152/148	3550	3150	850	NA

JETWAY JDL2

SPECIFICATIONS

Size	PR	Rim Size (inch)	Max. Outer Diameter (mm)	Maximum Section Width (mm)	Tread Depth		Speed Index	Load Index	Maximum Load Carrying Capacity			Flap Code
					mm	32nds			Single (Kgs)	Dual (Kgs)	IP (Kpa)	
295/75R22.5	14	9.00	1043	291	25	31.5	M(130)	144/141	2800	2575	760	NA
285/75R22.5	14	8.25	1077	292	25	31.5	M(130)	144/141	2800	2575	760	NA

JETSTEEL JDH

SPECIFICATIONS

Size	PR	Rim Size (inch)	Max. Outer Diameter (mm)	Maximum Section Width (mm)	Tread Depth		Speed Index	Load Index	Maximum Load Carrying Capacity			Flap Code
					mm	32nds			Single (Kgs)	Dual (Kgs)	IP (Kpa)	
900 R 20	14	7.0	1027	268	16.8	21.2	K (110)	141/139	2575	2430	790	20 N
1000 R 20	16	7.5	1061	283	18.0	22.7	K (110)	146/143	3000	2725	830	20 N
1100 R 20	16	8.0	1093	295	18.8	23.7	K (110)	150/147	3350	3075	830	20 RR
11 R 22.5	16	8.25	1062	278	18.9	23.8	L (120)	148/145	3000	2725	830	NA
11 R 24.5	16	8.25	1113	280	20.9	26.3	L (120)	148/144	3000	2725	830	NA

JETSTEEL JDH3

SPECIFICATIONS

Size	PR	Rim Size (inch)	Max. Outer Diameter (mm)	Maximum Section Width (mm)	Tread Depth		Speed Index	Load Index	Maximum Load Carrying Capacity			Flap Code
					mm	32nds			Single (Kgs)	Dual (Kgs)	IP (Kpa)	
8.25 R 20	14	6.5	977	235	16.5	20.8	K (110)	136/134	2240	2120	830	20M
8.25 R 20	16	6.5	977	235	16.5	20.8	K (110)	137/135	2300	2180	860	20M
10.00 R 20	16	7.5	1061	287	18.0	22.7	K (110)	146/143	3000	2725	830	20N
11.00 R 22	16	8.0	1144	297	19.0	23.9	K (110)	152/149	3550	3250	830	22RR

JETWAY JDH6

SPECIFICATIONS

Size	PR	Rim Size (inch)	Max. Outer Diameter (mm)	Maximum Section Width (mm)	Tread Depth		Speed Index	Load Index	Maximum Load Carrying Capacity			Flap Code
					mm	32nds			Single (Kgs)	Dual (Kgs)	IP (Kpa)	
315/80 R 22.5	18	9x22.5	1097	318	23.5	29.6	M (130)	156/150	4000	3350	850	NA

JETSTEEL JDE

SPECIFICATIONS

Size	PR	Rim Size (inch)	Max. Outer Diameter (mm)	Maximum Section Width (mm)	Tread Depth		Speed Index	Load Index	Maximum Load Carrying Capacity			Flap Code
					mm	32nds			Single (Kgs)	Dual (Kgs)	IP (Kpa)	
8.25 R 20	16	6.5	983	248	17.2	21.7	K (110)	137/135	2300	2180	860	20M
10.00 R 20	16	7.5	1071	287	19.0	23.9	K (110)	146/143	3000	2725	830	20N
10.00 R 20	18	7.5	1071	287	19.0	23.9	K (110)	149/146	3250	3000	830	20N
11.00 R 20	16	8.0	1096	295	20.0	25.2	K (110)	150/147	3350	3075	830	20RR

LIGHT TRUCK TYRES





JET RIB

Offers Excellent Mix Of High Mileage And Retreadability

SALIENT FEATURES

- More rubber in tread region
- Flat tread
- Dual radius tread
- Specially designed grooves geometry

BENEFITS

- High mileage
- Better control & road grip
- Even wear
- Excellent resistance to crack growth



AVAILABLE SIZES:

6.50-14 (8PR), 7.00-15 (10PR/12PR), 7.00-16 (12PR/14PR), 7.50-16 (12PR/14PR/16PR)



JETMILES

Offers Superb Mix Of Very Good Mileage And Excellent Casing Retreadability

SALIENT FEATURES

- Extra rubber in tread region
- Bigger & wider tyre
- Computer-optimized footprint pressure distribution
- Strong casing

BENEFITS

- Very high mileage
- Robust looks
- Smooth wear
- Better retreadability



AVAILABLE SIZES:

7.00-16 (12PR/14PR), 7.50-16 (14PR), 8.25-16 (16PR)



JET RIB SUPER

Offers Superior Mileage And Structural Durability In Heavy Duty Applications

SALIENT FEATURES

- More rubber in tread region
- Flat tread
- Dual radius tread
- Mechanically stable casing

BENEFITS

- Very good mileage
- Better control & road grip
- Even wear
- Structural durability and retreadability



AVAILABLE SIZES:

7.50-16 (14PR)



JET R MILES

Ultimate Mileage in Rib Category

SALIENT FEATURES

- Super high NSD
- Unique rib geometry with extra stiff tread region in a sinusoidal pattern
- Smooth like a thumb buttress
- Strong nylon casing

BENEFITS

- Ultimate mileage
- Less flexing of ribs leading to lesser heat development and smooth wear
- Smooth casing that allows multiple retreads
- High casing reliability



AVAILABLE SIZES:

7.00-15 (10PR), 7.00-16 (12PR), 7.50-16 (16PR), 8.25-16 (16PR)



FLEETKING

Offers Good Mileage And Durability In All Round Application

SALIENT FEATURES

- Deep tread rubber with unique compound
- Wide flat tread
- Aggressive 5 rib saw toothed pattern with sipes
- Rounded shoulder

BENEFITS

- Extra long life
- Uniform wear and wider grip on road
- Good traction and efficient water channelling
- Smooth manoeuvring



AVAILABLE SIZES:

6.00-16 (8PR)



JET RIB XTRA

Offers Excellent Mix Of High Mileage And Retreadability

SALIENT FEATURES

- More rubber in tread region
- Flat tread
- Dual radius tread
- Specially designed grooves geometry

BENEFITS

- High mileage
- Better control & road grip
- Even wear
- Excellent resistance to crack growth



AVAILABLE SIZES:

7.50-16 (18PR)



JET RIB AX

Excellent Casing Reliability In Tough Loading Conditions

SALIENT FEATURES

- Tough nylon casing
- Mechanically stable compound with super strong rubber matrix
- New generation design in sinusoidal pattern

BENEFITS

- High casing reliability even under heavy load
- More number of retreads
- Excellent wear nature with smooth wear characteristics



AVAILABLE SIZES:

6.50-14 (8PR)



JM 19

Offers High Mileage And Excellent Wear Characteristics

SALIENT FEATURES

- New generation design in sinusoidal pattern
- Specially designed grooves
- Dual bead construction
- More rubber in tread region

BENEFITS

- Excellent wear nature with smooth wear characteristics
- Better control and road grip
- Better stone rejection
- Strong bead construction to match casing construction
- High mileage



AVAILABLE SIZES:

8.25-16 (16PR)



TRAK TUF

Offers Longer Life And Excellent Durability In All Wheel Fitment Position

SALIENT FEATURES

- Strong shoulder lugs and center ribs
- Deep treads with wider shoulder opening
- Special material for strong casing

BENEFITS

- Good loading capability and excellent performance in on/off road application
- Longer life with cooler running
- High structural durability and performance



AVAILABLE SIZES:

7.50-16 (8PR/16PR)



JET-TRAK

Offers Excellent Combination Of High Mileage And Loading Capability

SALIENT FEATURES

- Bigger dimensions with pyramid type lugs
- More tread width and extra rubber with unique rubber compound
- Strong and clean casing

BENEFITS

- Good loading capacity
- High mileage
- Good casing value
- Big, attractive and dynamic look



AVAILABLE SIZES:

6.50-14 (10PR), 7.00-15 (12PR), 7.00-16 (14PR), 7.50-16 (16PR), 8.25-16 (16PR)



TRAK TUF XTRA

Offers Longer Life And Excellent Durability In All Wheel Fitment Position

SALIENT FEATURES

- Strong shoulder lugs and center ribs
- Deep treads with wider shoulder opening
- Special material for strong casing

BENEFITS

- Good loading capability and excellent performance in on/off road application
- Longer life with cooler running
- High structural durability and performance



AVAILABLE SIZES:

7.50-16 (14PR)



JET TRAK 39

Takes On Any Load

SALIENT FEATURES

- Strong casing construction
- Dual bead construction
- Specially developed tread compound
- Customer-friendly warranty policy

BENEFITS

- Very high load carrying capacity
- Strong bead construction to match casing construction
- Cut-resistant and cooler running
- Assurance of performance



AVAILABLE SIZES:

7.50-16 (G/14), 7.50-16 (J/18), 8.25-16 (J/18)



JET XTRA

Premium Mileage And High Casing Reliability

SALIENT FEATURES

- High tread depth with wider center rib
- Most optimum groove angles with a step
- Most optimum footprint pressure distribution
- Tough nylon casing

BENEFITS

- Premium mileage
- Extra tread rubber as wear increases
- Smooth and even wear
- High casing reliability



AVAILABLE SIZES:
7.50-16 (16PR), 8.25-16 (16PR)



STEEL KING

Offers Superb Mix Of Very Good Mileage And Excellent Casing Retreadability

SALIENT FEATURES

- Extra rubber in tread region
- Bigger & wider tyre
- Computer-optimized footprint pressure distribution
- Strong casing

BENEFITS

- Very high mileage
- Robust looks
- Smooth wear
- Better retreadability



AVAILABLE SIZES:
7.00R15 (10PR), 7.00R16 (12PR), 7.50R16 (14PR)



SAND CUM HIGHWAY DX

Excellent Performance In Sand As Well As Highway Applications

SALIENT FEATURES

- Extra wide tread
- Double chevron tread pattern design
- Uniform internal grooves inside the main groove
- Specially developed tread compound

BENEFITS

- Reduced contact pressure in sand terrain for better grip
- Excellent grip and traction in both sand terrain and highway
- Accommodating extreme weather conditions



AVAILABLE SIZES:
7.50-16 (8PR)



ULTIMA XPC1

Offers Longer Life And Excellent Durability In All Wheel Fitment Position

SALIENT FEATURES

- Circumferential grooves with fillets providing uniform bending stiffness to the blocks
- Shoulder tie bars increase block stiffness
- Variable length sipes across tread
- Mileage-innovative tread compound gives higher mileage

BENEFITS

- Improved wear, optimized performance and traction
- Better handling and steering while manoeuvring
- Stress relief in the blocks and better traction
- Better handling, stability and high fuel efficiency



AVAILABLE SIZES:
185R14C (8PR), 195R14C (8PR), 195R15C (8PR), 205R16C (8PR)*-New, 225/75R16C*-New, 215/75R16C*-New

LIGHT TRUCK RADIAL



JETWAY JUH5

Offers Better Road Grip And Good Mileage

SALIENT FEATURES

- Straight groove design
- High tread depth
- Trendy and unique sipe design
- Wider tread surface

BENEFITS

- Better vehicle handling
- Extra initial mileage
- Better flexing
- Better wear characteristics
- Better pressure distribution



AVAILABLE SIZES:

10R17.5 (16PR), 235/75R17.5 (14PR)

LIGHT TRUCK BIAS



JET RIB

SPECIFICATIONS

Size	LR/PR	Max Speed KMPH# /SI	Rim (In)	Maximum Outer Diameter		Maximum Section Width		Tread Depth		App. Flaps	Maximum Tyre Load (Single)				Maximum Tyre Load (Dual)			
											Load		Pressure*		Load		Pressure*	
				mm	In	mm	In	mm	32nds		Kgs	Lbs	kPa	PSI	Kgs	Lbs	kPa	PSI
6.50-14	D/8	130 / M	5.0	700	27.6	190	7.5	10.1	12.7	NA	840	1850	415	60	800	1755	415	60
7.00-15	E/10	130 / M	5.5	774	30.5	213	8.4	12.3	15.5	15 M	1060	2335	515	75	925	2040	515	75
7.00-15	F/12	130 / M	5.5	774	30.5	213	8.4	12.3	15.5	15 M	1175	2590	620	90	1030	2270	620	90
7.00-16	F/12	130 / M	5.5	803	31.6	209	8.2	12.5	15.7	16 N	1215	2680	620	90	1065	2345	620	90
7.00-16	G/14	130 / M	5.5	803	31.6	209	8.2	13.0	16.4	16 N	1305	2875	690	100	1150	2535	690	100
7.50-16	G/14	130 / M	6.0	830	32.7	223	8.8	12.4	15.6	16 N	1495	3295	690	100	1315	2900	690	100
7.50-16	H/16	130 / M	6.0	830	32.7	223	8.8	12.4	15.6	16 N	1580	3485	760	110	1390	3065	760	110
7.50-16	F/12	130 / M	6.0	825	32.5	223	8.8	12.4	15.6	16N	1405	3095	620	90	1240	2735	620	90

JET RIB SUPER

SPECIFICATIONS

Size	LR/PR	Max Speed KMPH# /SI	Rim (In)	Maximum Outer Diameter		Maximum Section Width		Tread Depth		App. Flaps	Maximum Tyre Load (Single)				Maximum Tyre Load (Dual)			
											Load		Pressure*		Load		Pressure*	
				mm	In	mm	In	mm	32nds		Kgs	Lbs	kPa	PSI	Kgs	Lbs	kPa	PSI
7.50-16	G/14	130 / M	6.0	830	32.7	223	8.8	12.4	15.6	16 N	1495	3295	690	100	1315	2900	690	100

JETMILES

SPECIFICATIONS

Size	LR/PR	Max Speed KMPH# /SI	Rim (In)	Maximum Outer Diameter		Maximum Section Width		Tread Depth		App. Flaps	Maximum Tyre Load (Single)				Maximum Tyre Load (Dual)			
											Load		Pressure*		Load		Pressure*	
				mm	In	mm	In	mm	32nds		Kgs	Lbs	kPa	PSI	Kgs	Lbs	kPa	PSI
7.00-16	F/12	100 / J	5.5	785	30.9	207	8.1	11.0	13.9	16M, 16N	1215	2680	620	90	1065	2345	620	90
7.00-16	G/14	130 / M	5.5	793	31.2	205	8.1	10.9	13.7	16 N	1305	2875	690	100	1150	2535	690	100
7.50-16	G/14	130 / M	6.0	819	32.2	218	8.6	11.4	14.4	16 N	1495	3295	690	100	1315	2900	690	100
8.25-16	H/16	130 / M	6.0	864	34.0	241	9.5	15.0	18.9	16N	1845	4065	655	95	1755	3870	655	95

JET R MILES

SPECIFICATIONS

Size	LR/PR	Max Speed KMPH# /SI	Rim (In)	Maximum Outer Diameter		Maximum Section Width		Tread Depth		App. Flaps	Maximum Tyre Load (Single)				Maximum Tyre Load (Dual)			
											Load		Pressure*		Load		Pressure*	
				mm	In	mm	In	mm	32nds		Kgs	Lbs	kPa	PSI	Kgs	Lbs	kPa	PSI
7.00-15	E/10	100 / J	5.5	777	30.6	209	8.2	14.5	18.3	15M	1050	2315	515	75	925	2040	515	75
7.00-16	F/12	100 / J	5.5	805	31.7	211	8.3	14.5	18.3	16M, 16N	1215	2680	620	90	1065	2350	620	90
7.50-16	H/16	110 / K	6.0	830	32.7	224	8.8	15.0	18.9	16N	1580	3485	760	110	1390	3065	760	110
8.25-16	H/16	110 / K	6.0	869	34.2	237	9.3	16.0	20.2	16N	1850	4080	760	110	1750	3860	760	110



FLEETKING

SPECIFICATIONS

Size	LR/PR	Max Speed KMPH# /SI	Rim (In)	Maximum Outer Diameter		Maximum Section Width		Tread Depth		App. Flaps	Maximum Tyre Load (Single)				Maximum Tyre Load (Dual)			
				mm	In	mm	In	mm	32nds		Load		Pressure*		Load		Pressure*	
											Kgs	Lbs	kPa	PSI	Kgs	Lbs	kPa	PSI
6.00-16	D/8	100/J	4.5	741	29.2	175	6.9	10.4	131	16K	765	1690	415	60	670	1480	415	60

JETTRIB AX

SPECIFICATIONS

Size	LR/PR	Max Speed KMPH# /SI	Rim (In)	Maximum Outer Diameter		Maximum Section Width		Tread Depth		App. Flaps	Maximum Tyre Load (Single)				Maximum Tyre Load (Dual)			
				mm	In	mm	In	mm	32nds		Load		Pressure*		Load		Pressure*	
											Kgs	Lbs	kPa	PSI	Kgs	Lbs	kPa	PSI
6.50-14	D/8	100/J	4.5	702	27.6	194	7.6	9.9	12.5	-	840	1850	415	60	795	1755	415	60

JETTRIB XTRA

SPECIFICATIONS

Size	LR/PR	Max Speed KMPH# /SI	Rim (In)	Maximum Outer Diameter		Maximum Section Width		Tread Depth		App. Flaps	Maximum Tyre Load (Single)				Maximum Tyre Load (Dual)			
				mm	In	mm	In	mm	32nds		Load		Pressure*		Load		Pressure*	
											Kgs	Lbs	kPa	PSI	Kgs	Lbs	kPa	PSI
7.50-16	J/18	100/J	6.0	830	32.7	223	8.8	12.4	15.6	16N	1650	3640	795	115	1450	3195	795	115

JM 19

SPECIFICATIONS

Size	LR/PR	Max Speed KMPH# /SI	Rim (In)	Maximum Outer Diameter		Maximum Section Width		Tread Depth		App. Flaps	Maximum Tyre Load (Single)				Maximum Tyre Load (Dual)			
				mm	In	mm	In	mm	32nds		Load		Pressure*		Load		Pressure*	
											Kgs	Lbs	kPa	PSI	Kgs	Lbs	kPa	PSI
8.25-16	H/16	130/M	6.5	857	33.7	238	9.4	13.5	17.0	16N	1845	4065	760	110	1755	3870	760	110

TRAK TUF

SPECIFICATIONS

Size	LR/PR	Max Speed KMPH# /SI	Rim (In)	Maximum Outer Diameter		Maximum Section Width		Tread Depth		App. Flaps	Maximum Tyre Load (Single)				Maximum Tyre Load (Dual)			
				mm	In	mm	In	mm	32nds		Load		Pressure*		Load		Pressure*	
											Kgs	Lbs	kPa	PSI	Kgs	Lbs	kPa	PSI
7.50-16	H/16	130/M	6.0	842	33.1	225	8.9	17.1	21.5	16N	1580	3485	760	110	1390	3065	760	110
7.50-16	D/8	130/M	5.5	842	33.1	225	8.9	17.1	21.5	16N	1120	2470	415	60	975	2150	415	60



TRAK TUF XTRA

SPECIFICATIONS

Size	LR/PR	Max Speed KMPH# /SI	Rim (In)	Maximum Outer Diameter		Maximum Section Width		Tread Depth		App. Flaps	Maximum Tyre Load (Single)				Maximum Tyre Load (Dual)			
				mm	In	mm	In	mm	32nds		Load		Pressure*		Load		Pressure*	
											Kgs	Lbs	kPa	PSI	Kgs	Lbs	kPa	PSI
7.50-16	G/14	100/J	6	842	33.1	225	8.6	17.1	21.5	16N	1510	3330	650	95	1440	3175	650	95

JET-TRAK

SPECIFICATIONS

Size	LR/PR	Max Speed KMPH# /SI	Rim (In)	Maximum Outer Diameter		Maximum Section Width		Tread Depth		App. Flaps	Maximum Tyre Load (Single)				Maximum Tyre Load (Dual)			
				mm	In	mm	In	mm	32nds		Load		Pressure*		Load		Pressure*	
											Kgs	Lbs	kPa	PSI	Kgs	Lbs	kPa	PSI
6.50-14	E/10	130/M	5.0	709	27.9	197	7.8	12.5	15.7	NA	940	2070	500	72	880	1940	500	72
7.00-15	F/12	130/M	5.5	787	31.0	214	8.4	15.1	19.0	15M	1175	2590	620	90	1030	2270	620	90
7.00-16	G/14	130/M	5.5	804	31.7	207	8.1	16.6	20.9	16N	1305	2875	690	100	1150	2535	690	100
7.50-16	H/16	130/M	6.0	843	33.2	232	9.1	17.3	21.8	16N	1580	3485	760	110	1390	3065	760	110
8.25-16	H/16	130/M	6.5	864	34.0	239	9.4	17.8	22.4	16N	1845	4065	760	110	1755	3870	760	110

JETTRAK 39

SPECIFICATIONS

Size	LR/PR	Max Speed KMPH# /SI	Rim (In)	Maximum Outer Diameter		Maximum Section Width		Tread Depth		App. Flaps	Maximum Tyre Load (Single)				Maximum Tyre Load (Dual)			
				mm	In	mm	In	mm	32nds		Load		Pressure*		Load		Pressure*	
											Kgs	Lbs	kPa	PSI	Kgs	Lbs	kPa	PSI
7.50-16	G/14	100/J	6	845	33.3	231	8.8	17.3	21.8	16N	1510	3330	650	95	1440	3175	650	95
7.50-16	J/18	100/J	6	845	33.3	231	8.8	17.3	21.8	16N	1650	3640	795	115	1450	3195	795	115
8.25-16	J/18	100/J	6.0	864	34.0	239	9.4	17.8	22.4	16N	1900	4190	795	115	1800	3970	795	115

JET XTRA

SPECIFICATIONS

Size	LR/PR	Max Speed KMPH# /SI	Rim (In)	Maximum Outer Diameter		Maximum Section Width		Tread Depth		App. Flaps	Maximum Tyre Load (Single)				Maximum Tyre Load (Dual)			
				mm	In	mm	In	mm	32nds		Load		Pressure*		Load		Pressure*	
											Kgs	Lbs	kPa	PSI	Kgs	Lbs	kPa	PSI
7.50-16	H/16	110/K	6.0	847	33.3	226	8.9	18.8	23.7	16N	1580	3485	760	110	1390	3065	760	110
8.25-16	H/16	110/K	6.0	860	33.9	238	9.4	19.7	24.8	16N	1850	4080	760	110	1750	3860	760	110

LIGHT TRUCK BIAS



SAND CUM HIGHWAY DX

SPECIFICATIONS

Size	LR/PR	Max Speed KMPH# /SI	Rim (In)	Maximum Outer Diameter		Maximum Section Width		Tread Depth		App. Flaps	Maximum Tyre Load (Single)				Maximum Tyre Load (Dual)				
				mm	In	mm	In	mm	32nds		Load		Pressure*		Load		Pressure*		
											Kgs	Lbs	kPa	PSI	Kgs	Lbs	kPa	PSI	
7.50-16	D/8	120	5.5	832	32.8	225	8.9	12.5	15.7	16N	1090	2405	415	NA	NA	NA	NA	NA	NA

LIGHT TRUCK RADIAL

STEEL KING

SPECIFICATIONS

Size	PR	Max Speed KMPH# /SI	Rim (In)	Maximum Outer Diameter		Maximum Section Width		Tread Depth		App. Flaps	Maximum LCC		
				mm	mm	mm	32nds	Single (Kgs)	Dual (Kgs)		IP (kpa)		
7.00 R 15 (TT)	10	109/105	15	767	218	11	13.9	15M	1030	925	550		
7.00 R 16 (TT)	12	116/114	16	793	218	11	13.9	16N	1250	1180	690		
7.50 R 16 (TT)	14	122/118	16	824	228	11.7	14.7	16N	1500	1320	725		

ULTIMA XPC1

SPECIFICATIONS

Size	PR	Max Speed KMPH# /SI	Rim (In)	Maximum Outer Diameter		Maximum Section Width		Tread Depth		App. Flaps	Maximum LCC		
				mm	mm	mm	32nds	Single (Kgs)	Dual (Kgs)		IP (kpa)		
185 R 14 C	8	R	5.5 x 14	674	203	10.5	13.2	NA	850	800	450		
195 R 14 C	8	S	5.5 x 14	688	228	10.5	13.2	NA	950	900	450		
195 R 15 C	8	S	5.5 x 15	715	225	8.9	11.2	NA	975	925	450		
205 R 16 C	8	R	5.5 x 16	757	219	10.0	12.6	NA	1060	1000	450		
225/75 R 16 C	NA	M	6.0 x 16	758	232	10.0	12.6	NA	1450	1400	575		
215/75 R 16 C	8	S	6.0 x 16	741	227	9.7	12.2	NA	1150	1090	475		


JETWAY JUH5

SPECIFICATIONS

Size	PR	Rim Size (inch)	Max. Outer Diameter (mm)	Maximum Section Width mm	Tread Depth		Speed Index	Load Index	Maximum Load Carrying Capacity			Flap Code
					mm	32nds			Single (Kgs)	Dual (Kgs)	IP (Kpa)	
10 R 17.5	16	7.5	866	259	13	16.4	M (130)	134/132	2120	2000	800	NA
235/75 R 17.5	14	6.75	804	239	15	18.9	M (130)	132/130	2000	1900	775	NA



PCR AND SUV TYRES

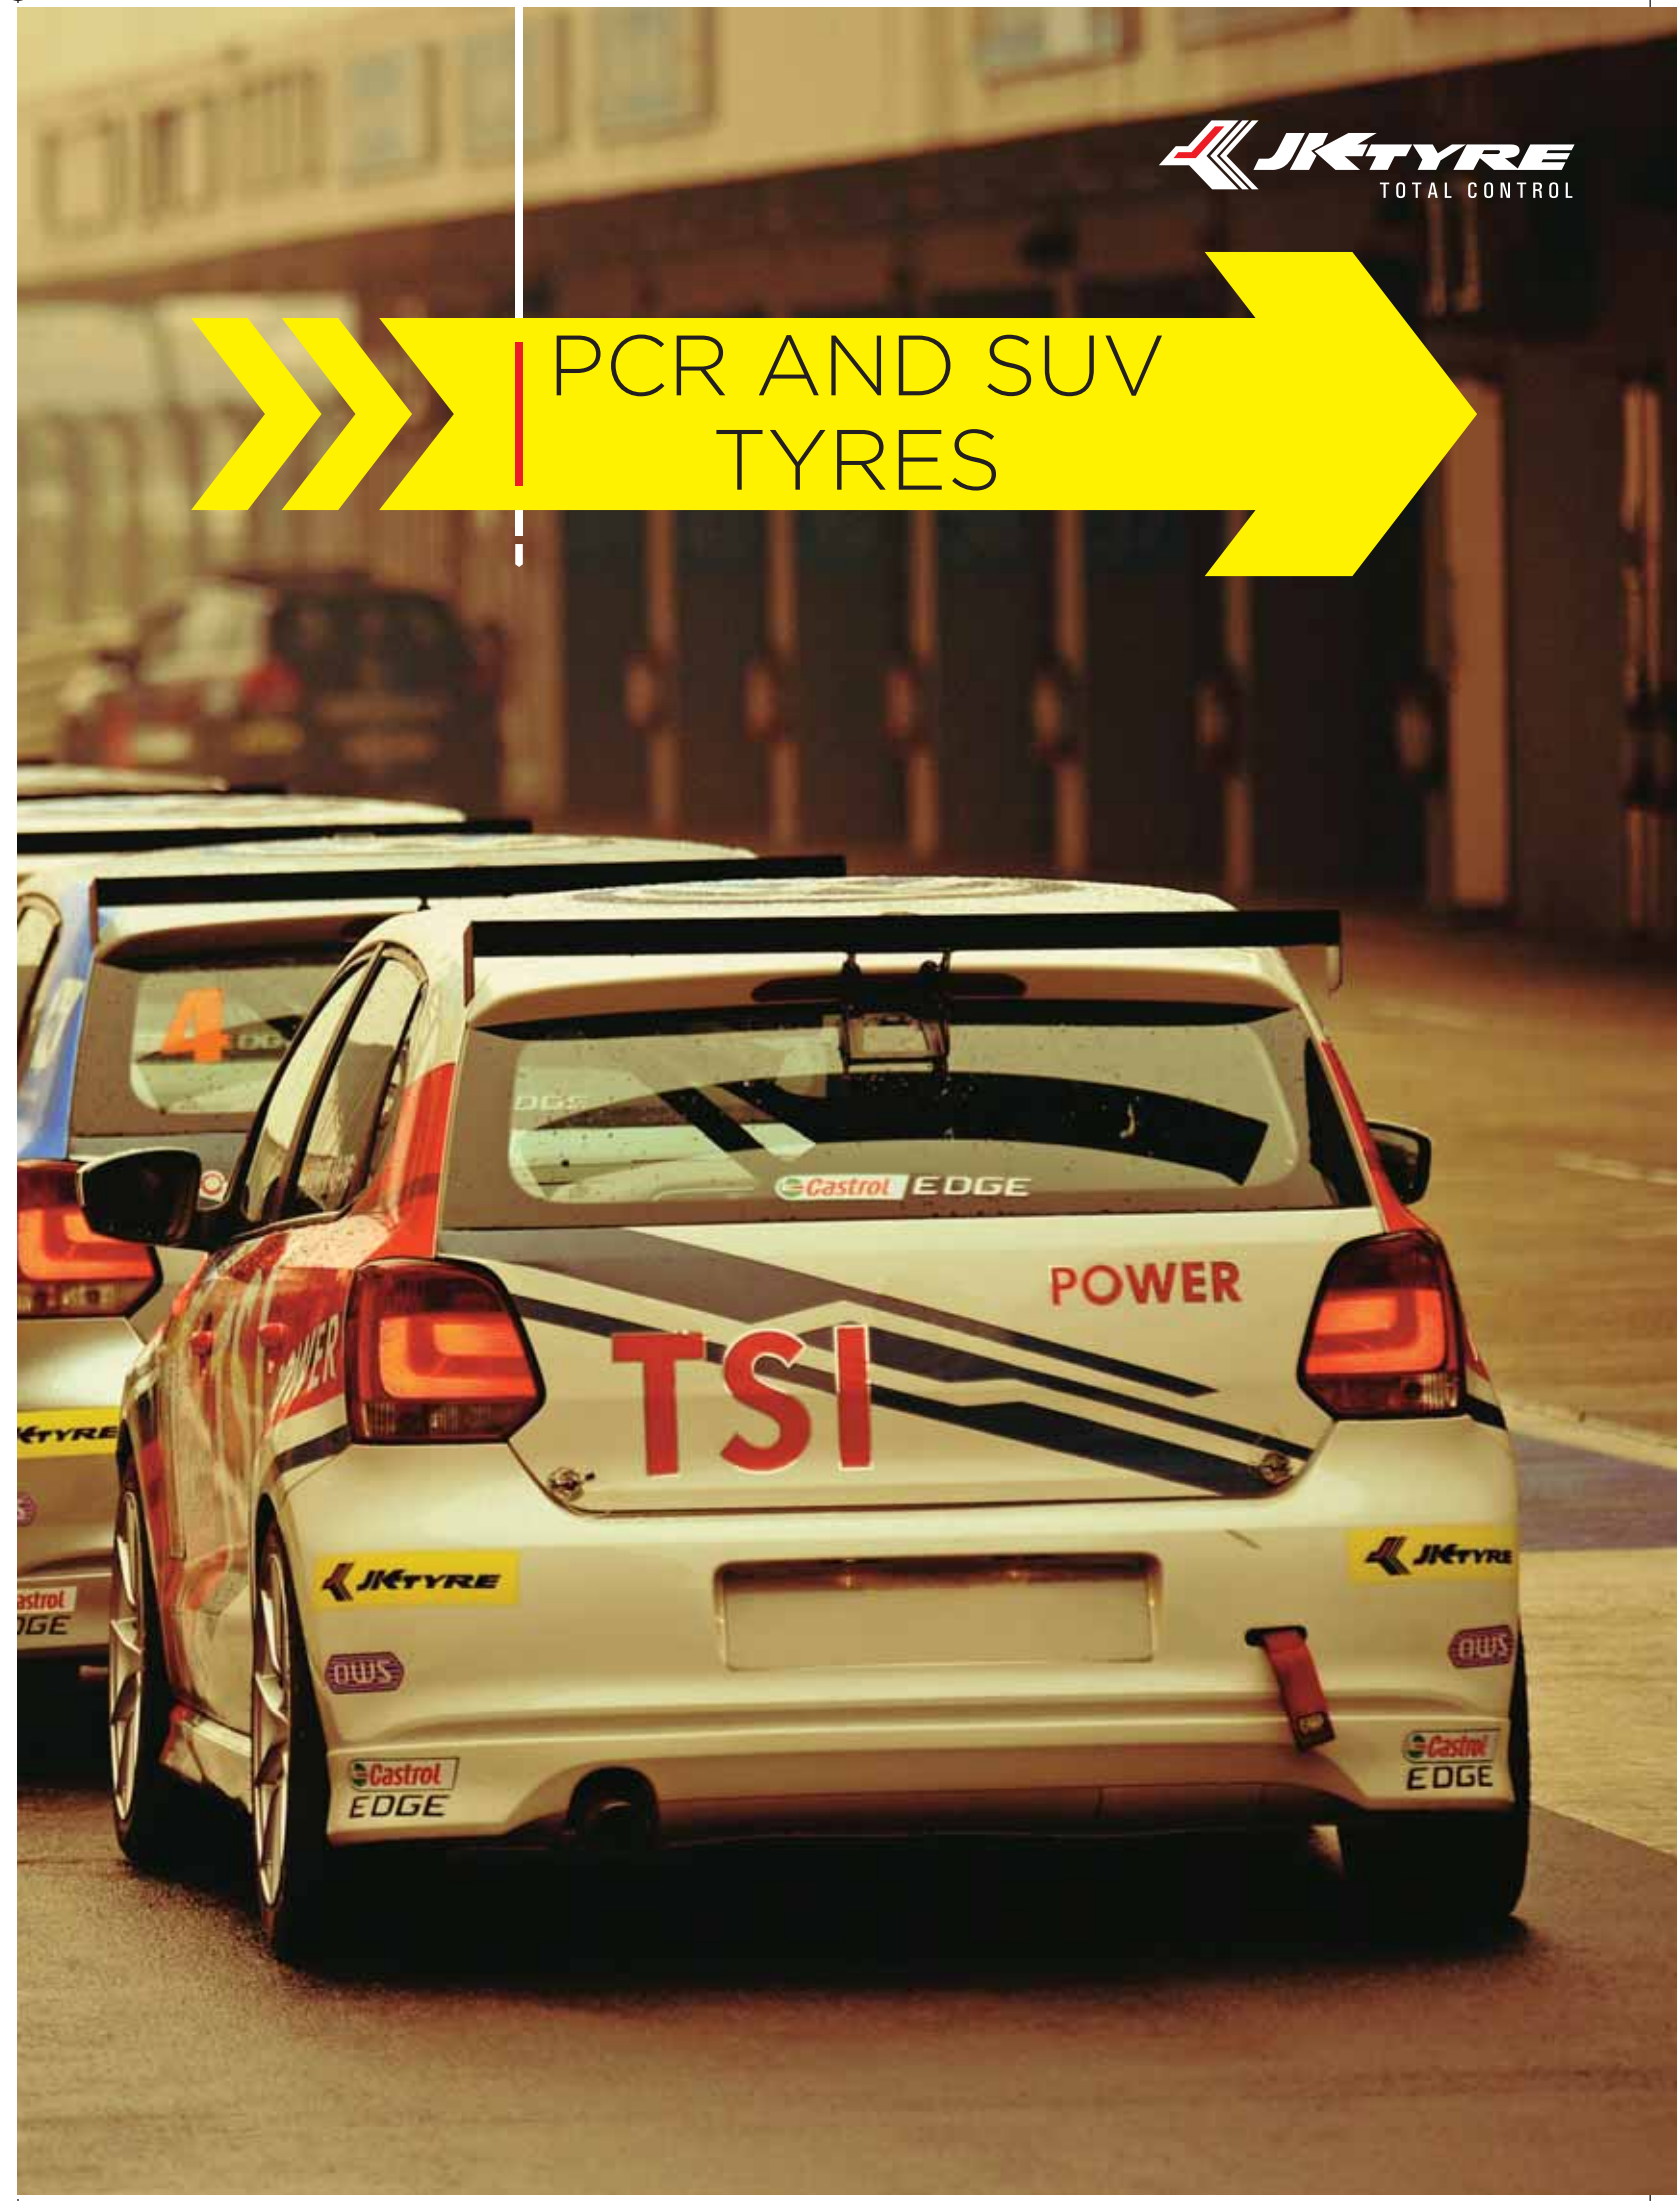

“Life’s unexpected
journeys have helped me
discover so much more.”





ULTIMA LXT

The Wonder Radial

SALIENT FEATURES

- Extra rubber and deeper grooves
- Specially profiled lateral grooves
- Designed with Genetic Algorithm-based noise optimization tool
- Specially designed tread compound

BENEFITS

- Longer tyre life
- Better wet and dry braking
- Quietest tyre of its kind
- Low rolling resistance & higher fuel economy

AVAILABLE SIZES:

135/70R12, 145/70R12, 155/65R12



ULTIMA-NXT

The Smart Tyre

SALIENT FEATURES

- Advanced, simulated next generation state-of-the-art tread design with unique Stabilizer Groove Technology
- Ultra high strength alloy steel belts
- Unique Soft Base tread configuration

BENEFITS

- High mileage and durability with crisp handling and vehicle stability on sharp curves
- High puncture resistance
- Excellent riding comfort

AVAILABLE SIZES:

145/70R12, 145/80R12, 145/70R13, 145/80R13, 155/70R13



ULTIMA NEO

Fuel Savings Of More Than 25% Of Tyre Cost*

SALIENT FEATURES

- Revolutionary tread pattern profile with optimized footprint
- Shark-winglet shoulder design
- High stiffness solid center grooves
- Variable groove edges

BENEFITS

- Higher fuel savings and improved wear nature of tyre
- Excellent handling and reduced noise levels
- Straight line stability and improved handling
- Better steering manoeuvrability and dissipation of noise sources

AVAILABLE SIZES:

145/80R12, 145/80R13, 155/65R13, 155/70R13, 155/80R13



ULTIMA SPORT

The Sporty Radial

SALIENT FEATURES

- Optimised tread feature
- Shoulder stiffness gradient

BENEFITS

- Superior Aquaplaning at high speed
- Better cornering

AVAILABLE SIZES:

165/70R12, 165/65R13, 175/60R13, 185/60R13, 165/65R14, 165/80R14, 185/60R14, 185/65R14, 195/60R14



ULTIMA 210S

Outstanding All-Round Performer

SALIENT FEATURES

- Wider tread
- Optimised pattern
- High tensile belts
- Circumferential grooves

BENEFITS

- Better road holding
- High mileage
- Good performance at high speeds with load
- Low noise
- Low Aquaplaning

AVAILABLE SIZES:

195/70R14



VECTRA

The Swift Radial

SALIENT FEATURES

- Wider contact patch
- Exclusive tread block pattern
- High aesthetics

BENEFITS

- Excellent traction and grip on wet and dry surfaces
- Combines all-terrain traction with a quiet highway ride
- Enhanced visual appeal of the vehicle

AVAILABLE SIZES:

155/80R13, 155/70R14, 165/70R14, 175/65R14, 175/70R14, 185/70R14, 185/60R15, 185/65R15, 195/65R15, 195/55R16, 205/60R16



ULTIMA XPS

The Swift Radial

SALIENT FEATURES

- LRR - Rubber Compound
- Optimized shoulder grooves
- Developed on Spring-mass-Dashpot Concept-
"Feel your car" not the Road

BENEFITS

- Maximized fuel efficiency
- High cornering stability and excellent handling
- Excellent riding comfort

AVAILABLE SIZES:

165/80R13, 175/70R13



ULTIMA ROYALE

Best In Class Durability And Strength*

SALIENT FEATURES

- Wide tread width
- Closed outer shoulder and sturdy tread
- Optimized curved grooves coupled with angled sipes

BENEFITS

- Enables high mileage potential
- Excellent cornering, stability and low noise generation
- Most efficient water drainage from centre for contact patch

AVAILABLE SIZES:

185/70R13

PASSENGER CAR RADIALS



UX1

Ultra High Performance*

SALIENT FEATURES

- High strength, extra flexible sidewall
- Genetic algorithm used for optimized pitch sequence
- Variable groove geometry/sturdy shoulder blocks
- Specially designed asymmetric tread design

BENEFITS

- Unmatched ride comfort and durability on Indian roads, specially pothole-damaged roads
- Least noise, silent running
- Superb handling, extra grip and safety
- High speed control and better handling response

AVAILABLE SIZES:

195/55R15, 195/60R15, 205/60R15, 205/55R16, 225/50R17, 235/55R17

PASSENGER CAR RADIALS



TORNADO

All-Terrain, High Performance Steel Radial

SALIENT FEATURES

- Structured wide centre groove
- Geometrically stable tread design
- Rounder shoulder profile
- Three pitch tread sequence
- Hi-structured black tread compound

BENEFITS

- Superior traction on wet roads
- Optimised all terrain performance
- Better cornering stability on wet and dry roads
- Low tyre noise
- Better handling at high speed

AVAILABLE SIZES:

155/65R13, 155/70R13, 165/65R13, 175/70R13, 165/80R14, 175/65R14



UX ROYALE

Unbeatable At 240Km/Hr*

SALIENT FEATURES

- 5-rib asymmetric design
- Variable Draft Groove Technology
- Waffle groove design and exceptional braking features
- Stable shoulder tread blocks
- Aero-wing design
- Optimised through advanced simulation for optimum road contact
- Superior Dual tread compound
- NVH optimised to lower noise

BENEFITS

- Superior ride comfort
- High speed performance up to 210-240 km/hr*
- Crisp handling

AVAILABLE SIZES:

175/65R14, 175/70R14, 185/70R14, 175/65R15, 185/65R15, 195/65R15, 205/65R15, 205/55R16, 205/60R16, 215/60R16



ZEPHYR

Premium V-Rated Tyre

SALIENT FEATURES

- Extra supple sidewalls
- Curved grooves coupled with angular sipes
- Optimised tread distribution

BENEFITS

- Comfortable ride and reduced vibration during high speed manoeuvring
- Most efficient water drainage from centre of contact patch
- Uniform tread wear

AVAILABLE SIZES:

195/60R14, 195/65R15, 205/60R15, 205/65R15



ELANZO

Best Tyre For Manoeuvrability At High Speeds*

SALIENT FEATURES

- Specially designed macho tread pattern
- Unique open shoulder groove design
- FEA optimized footprint pressure distribution
- Hi-Mileage tread compound

BENEFITS

- Enhanced manoeuvrability at high speeds
- Better wet grip
- Smooth wear and high mileage
- Long tyre life

AVAILABLE SIZES:

235/70R16



ELANZO CRUSERO

Best In Class Durability And Strength*

SALIENT FEATURES

- Computer optimized sidewall cavity and construction
- Optimized 3-Pitch sequence (with noise optimization tool)
- FEA optimized footprint pressure distribution
- Hi-mileage tread compound

BENEFITS

- Best cornering characteristics
- Smooth wear and high mileage
- Long tyre life
- Low noise

AVAILABLE SIZES:

205/65R15



ELANZO SUPRA

King Of Radials

SALIENT FEATURES

- Innovative sidewall design and apex construction
- Macho 4x4 tread pattern
- Unique open shoulder groove design

BENEFITS

- Hi-Damping load transfer function-optimal tyre for excellent ride quality
- Excellent on centre feel and manoeuvrability for high speed applications
- Enhanced wet grip

AVAILABLE SIZES:

245/75R16



ELANZO NXT

The Hunk Radial

SALIENT FEATURES

- Specially designed tread compound
- Beautifully designed Hydro channels
- Optimization of pitch sequence using Genetic Algorithm

BENEFITS

- For better handling, stability and high fuel efficiency
- Superb wet handling and anti-aquaplaning
- Quieter running at high speeds

AVAILABLE SIZES:

225/60R15, 205/60R16, 215/65R16, 255/65R16, 235/65R17



ELANZO TOURING

SUV Segment - Premium For Touring Segment

SALIENT FEATURES

- Symmetric touring design
- Central stability rib
- High lateral stiffness patten with filleted ribs
- Rolling-optimized high lateral stiffness shoulder blocks
- Unique Structure Coupled Hybrid Pitch Sequence (SCHPC)

BENEFITS

- Surefooted grip and handling on highways
- Superior On-Centre feel with enhanced driving stability
- Supreme grip with efficient sipe opening which assists with lateral grip, traction/braking and even smooth wear
- Improved cornering power and control in panic manoeuvres
- Quietest ever ride and highway speeds

AVAILABLE SIZES:

205/65R15



RANGER A/T

All-Terrain, High Performance Steel Radial

SALIENT FEATURES

- All terrain design
- Variable Draft Groove Technology
- Full depth grooves
- Tougher Sidewalls

BENEFITS

- Modern design featuring a combination of wide lateral grooves and functionally designed tread elements
- Optimized pitch sequence for even tread wear and reduced tread noise
- Provides optimum road contact offering supreme grip
- Takes on the toughest road hazards with confidence

AVAILABLE SIZES:

205/70R15C, 215/70R15C, 215/75R15, 235/70R16, 255/70R15LT, 31X10.5R15LT



BRUTE

Rugged Surface Steel Radial

SALIENT FEATURES

- Wide, deep see-through channels
- Aggressive 4 rib design with optimal sipes
- Wider tread width
- Dual Ply construction

BENEFITS

- Enhanced traction on wet roads for good handling and smooth ride
- High mileage and better grip on rugged surfaces
- Better tyre life and superior road grip
- High structural stability and optimized for softer ride

AVAILABLE SIZES:

215/75R15



RANGER H/T

Premium V-Rated Tyre

SALIENT FEATURES

- Traction Saw Rib Design (TSRD)
- Optimized extra fine siping
- Circumferential grooves
- Better handling
- Genetic Algorithm Optimized Noise

BENEFITS

- Saw traction ribs and shoulder rib with optimized stiffness gradient, giving control and stability
- Optimized sipe design to improve overall wear pattern and traction on slippery surfaces
- Multi-circumferential grooves for better hydro planing and improved water dispersion efficiency
- Solid centre rib and stiff shoulder rib improves steering response

AVAILABLE SIZES:

215/75R15, 235/75R15, 205/60R16, 215/65R16, 215/75R16, 235/70R16, 265/70R16, 265/75R16, 275/70R16, 225/65R17, 235/65R17, 265/65R17

PASSENGER CAR RADIALS



ULTIMA-LXT

SPECIFICATIONS

Size	TYRE TYPE	LOAD INDEX	SPEED RATING	NSD (mm)
135/70 R 12	TL	65	S	7.3
145/70 R 12	TL	69	S	6.8
155/65 R 12	TL	71	S	7.3

ULTIMA NEO

SPECIFICATIONS

Size	TYRE TYPE	LOAD INDEX	SPEED RATING	NSD (mm)
145/80 R 12	TL	74	T	7.0
145/80 R 13	TL	75	S	7.0
155/65 R 13	TL	73	T	7.0
155/70 R 13	TL	75	T	7.0
155/80 R 13	TL	79	T	7.0

ULTIMA-NXT

SPECIFICATIONS

Size	TYRE TYPE	LOAD INDEX	SPEED RATING	NSD (mm)
145/70 R 12	TL	69	T	7.8
145/80 R 12	TL	74	T	7.8
145/70 R 13	TL	71	T	7.8
145/80 R 13	TL	75	S	7.8
155/70 R 13	TL	75	T	8.2

ULTIMA SPORT

SPECIFICATIONS

Size	TYRE TYPE	LOAD INDEX	SPEED RATING	NSD (mm)
165/70 R 12	TL	77	T	7.8
165/65 R 13	TL	77	T	9.0
175/60 R 13	TL	77	T	8.0
185/60 R 13	TL	80	T	7.7
165/65 R 14	TL	79	S	8.8
165/80 R 14	TL	85	T	8.0
185/60 R 14	TL	82	H	8.3
185/65 R 14	TL	86	H	8.0
195/60 R 14	TL	86	H	8.2

PASSENGER CAR RADIALS



ULTIMA 210S

SPECIFICATIONS

Size	TYRE TYPE	LOAD INDEX	SPEED RATING	NSD (mm)
195/70 R 14	TL	95	S	8.5

ULTIMA XP

SPECIFICATIONS

Size	TYRE TYPE	LOAD INDEX	SPEED RATING	NSD (mm)
145/70 R 12	TL	69	T	6.6
145/80 R 12	TL	74	T	7.8

ULTIMA XPS

SPECIFICATIONS

Size	TYRE TYPE	LOAD INDEX	SPEED RATING	NSD (mm)
165/80R13	TL	83	T	8.8
175/70R13	TL	82	T	7.2

VECTRA

SPECIFICATIONS

Size	TYRE TYPE	LOAD INDEX	SPEED RATING	NSD (mm)
155/80 R 13	TL	79	S	7.8
155/70 R 14	TL	77	T	8.0
165/70 R 14	TL	81	S	7.2
175/65 R 14	TL	82	T	7.0
175/65 R 14	TL	82	H	7.0
175/70 R 14	TL	84	T	8.0
185/70 R 14	TL	88	S	8.0
185/70 R 14	TL	88	T	8.0
185/60 R 15	TL	84	T	8.5
185/65 R 15	TL	88	T	8.5
185/65 R 15	TL	88	S	7.2
195/65 R 15	TL	91	H	8.5
195/55 R 16	TL	87	V	7.8
205/60 R 16	TL	92	V	7.8

ULTIMA ROYALE

SPECIFICATIONS

Size	TYRE TYPE	LOAD INDEX	SPEED RATING	NSD (mm)
185/70 R 13	TL	86	T	8.2

PASSENGER CAR RADIALS



UX1

SPECIFICATIONS

Size	TYRE TYPE	LOAD INDEX	SPEED RATING	NSD (mm)
195/55 R 15	TL	85	V	8.3
195/60 R 15	TL	88	V	8.1
205/60 R 15	TL	91	V	8.3
205/55 R 16	TL	91	V	8.3
225/50 R 17	TL	94	V	7.8
235/55 R 17	TL	99	V	8.2

UX ROYALE

SPECIFICATIONS

Size	TYRE TYPE	LOAD INDEX	SPEED RATING	NSD (mm)
175/65R14	TL	82	H	7.0
175/70 R 14	TL	84	H	8.0
185/70R14	TL	88	H	8.0
175/65R15	TL	84	H	7.5
185/65 R 15	TL	88	H	8.0
195/65R15	TL	91	V	8.2
205/65 R 15	TL	94	V	8.2
205/55 R 16	TL	91	V	8.3
205/60 R 16	TL	92	V	8.2
215/60 R 16	TL	95	V	8.2

TORNADO

SPECIFICATIONS

Size	TYRE TYPE	LOAD INDEX	SPEED RATING	NSD (mm)
155/65 R 13	TL	73	T	7.0
155/70 R 13	TL	75	S	8.2
165/65 R 13	TL	77	T	8.8
175/70 R 13	TL	82	T	8.8
165/80 R 14	TL	85	S	8.0
175/65 R 14	TL	82	T	9.2

ZEPHYR

SPECIFICATIONS

Size	TYRE TYPE	LOAD INDEX	SPEED RATING	NSD (mm)
195/60 R 14	TL	86	V	8.3
195/65 R 15	TL	91	V	8.5
205/60 R 15		91	V	8.0
205/65 R 15	TL	94	V	8.0

SUV



ELANZO

SPECIFICATIONS

Size	TYRE TYPE	LOAD INDEX	SPEED RATING	NSD (mm)
235/70 R 16	TL	105	S	9.8

ELANZO SUPRA

SPECIFICATIONS

Size	TYRE TYPE	LOAD INDEX	SPEED RATING	NSD (mm)
245/75 R 16	TL	111	S	10.4

ELANZO CRUSERO

SPECIFICATIONS

Size	TYRE TYPE	LOAD INDEX	SPEED RATING	NSD (mm)
205/65 R 15	TL	94	S	9.3

ELANZO NXT

SPECIFICATIONS

Size	TYRE TYPE	LOAD INDEX	SPEED RATING	NSD (mm)
225/60 R 15	TL	96	V	9.0
205/60 R 16	TL	92	H	8.0
215/65 R 16	TL	98	H	8.2
255/65 R 16	TL	109	H	9.4
235/65 R 17	TL	104	H	8.8

SUV 4X4

ELANZO TOURING*

SPECIFICATIONS

Size	TYRE TYPE	LOAD INDEX	SPEED RATING	NSD (mm)
205/65 R 15	TL	94	V	9.4

BRUTE

SPECIFICATIONS

Size	TYRE TYPE	LOAD INDEX	SPEED RATING	NSD (mm)
215/75 R 15	TL	100	S	9.8

RANGER A/T*

SPECIFICATIONS

Size	TYRE TYPE	LOAD INDEX	SPEED RATING	NSD (mm)
205/70 R 15 C	TL	106/104	S	9.5
215/70 R 15 C	TL	109/107	S	9.5
215/75 R 15	TL	100	S	10.0
235/70 R 16	TL	105	T	10.0
255/70 R 15 C	TL	113/110	S	9.5
31x10.5 R 15 LT	TL	109	Q	13.0

RANGER H/T*


SPECIFICATIONS

Size	TYRE TYPE	LOAD INDEX	SPEED RATING	NSD (mm)
215/75 R 15	TL	100	S	10.0
235/75 R 15	TL	105	T	10.0
205/60 R 16	TL	92	H	8.7
215/65 R 16	TL	98	H	8.7
215/75 R 16	TL	101	T	10.0
235/70 R 16	TL	105	H	10.0
265/70 R 16	TL	111	T	10.0
265/75 R 16	TL	123/120	R	10.0
275/70 R 16	TL	119/116	R	8.0
225/65 R 17	TL	102	H	10.0
235/65 R 17	TL	104	H	10.0
265/65 R 17	TL	112	H	10.0

NEW*

TRUCK/BUS BIAS TYRES



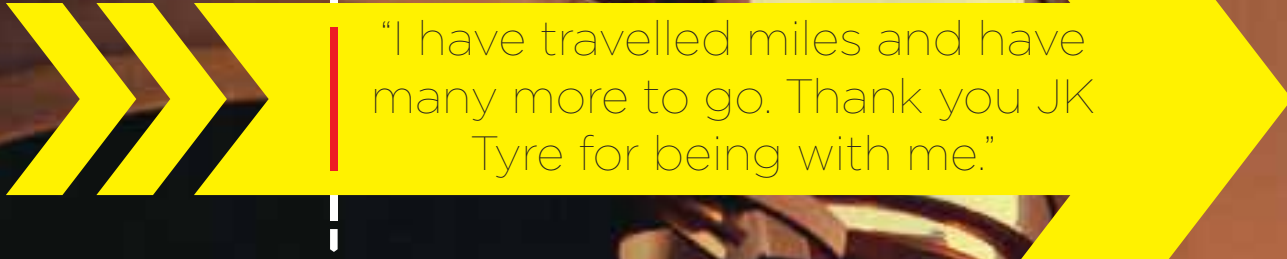

"I have travelled miles and have many more to go. Thank you JK Tyre for being with me."





JET RIB


Offers Excellent Combination Of Mileage And Structure For Moderate To Heavy Load

SALIENT FEATURES

- Flat and wide tread
- Rounded shoulders
- Aggressive 5 rib saw tooth pattern with optimized sipes
- Tough nylon casing

BENEFITS

- Good mileage
- Excellent control
- High casing reliability and multiple retreads



AVAILABLE SIZES:

9.00-20 (14PR), 10.00-20 (16PR/18PR)



JET RIB DX

Offers Ultimate Mileage And Multi Retreadability Casing For Long Haul

SALIENT FEATURES

- Flat & wide tread
- Rounded shoulders
- Aggressive 5 rib tooth pattern with optimized sipes
- Tough Nylon casing
- Specially designed Bead profile

BENEFITS

- High mileage
- Smooth & easy manouvering
- Excellent control
- High casing reliability & multiple retreads
- Stronger bead area



AVAILABLE SIZES:

10.00-20 (16PR)



JET RIB-CX

Offers Excellent Combination Of Mileage And Structure For Moderate To Heavy Load

SALIENT FEATURES

- Extra rubber at the center
- Excellent 5 rib tread pattern
- Strong nylon casing
- Tread with a dual radius

BENEFITS

- Good mileage
- Very good steer control
- Lower failures
- Smooth and even wear



AVAILABLE SIZES:

8.25-20 (14PR/16PR)



JET R PLUS

High Mileage And Retreadability

SALIENT FEATURES

- Flat and wide tread
- Rounded shoulders
- Thumb window design
- Tough nylon casing

BENEFITS

- High mileage
- Smooth and easy manoeuvring
- Multiple retreads
- Casing reliability



AVAILABLE SIZES:

10.00-20 (16PR/18PR), 11.00-20 (16PR)



JET R MILES


Ultimate Mileage Tyre

SALIENT FEATURES

- Super high NSD
- Thumb buttress design
- Strong nylon casing
- Unique rib geometry

BENEFITS

- Ultimate mileage
- Multiple retreads
- High casing reliability
- Lesser heat development



AVAILABLE SIZES:

8.25-20 (16PR), 10.00-20 (16PR), 11.00-20 (16PR)



FLEETKING

Offers Good Mileage And Durability In All Round Application

SALIENT FEATURES

- Deep tread rubber with unique compound
- Wide flat tread
- Aggressive 5 rib saw toothed pattern with sipes
- Rounded shoulder

BENEFITS

- Extra long life
- Uniform wear and wider grip on road
- Good traction and efficient water channelling
- Smooth manoeuvring



AVAILABLE SIZES:

8.25-20 (14PR), 9.00-20 (14PR), 10.00-20 (16PR), 11.00-20 (16PR)



JET ACE

Tyre For Maximum Casing Reliability

SALIENT FEATURES

- Tough nylon casing
- Mechanically stable compound
- New generation design in sinusoidal pattern

BENEFITS

- High casing reliability even under heavy load
- More number of retreads
- Excellent wear nature with smooth wear



AVAILABLE SIZES:

10.00-20 (18PR)



FLEETKING-100

Offers Durable Performance On All Wheel Application

SALIENT FEATURES

- Standard rubber depth with low heat build up compound
- Wide flat tread
- Aggressive 5 rib saw toothed pattern with spies
- Rounded shoulder

BENEFITS

- Longer life and durable performance
- Uniform wear
- Good traction and efficient water channelling
- Smooth manoeuvring



AVAILABLE SIZES:

9.00-20 (14PR)



HI-WAY KING

Offers Good Mileage, Durability And Retreadability For All Wheel Fitment

SALIENT FEATURES

- Wider shoulder grooves and plain shoulder ribs
- Deep sipes with zig-zag pattern
- Wide flat tread
- Unique buttress design

BENEFITS

- Excellent manoeuvrability
- Excellent traction and road grip
- Improved load distribution and wear characteristics
- Excellent heat dissipation and retreadability



AVAILABLE SIZES:
12.00-20 (18PR), 11.00-22 (16PR)



JET TUFF DX

Ultimate Load Carrying Capacity And Excellent Mileage

SALIENT FEATURES

- Wider tread with flat rib & broad lugs
- Specially designed Bead profile
- Specially developed tread compound
- Superior casing with high fabric strength

BENEFITS

- High mileage & smooth wear
- Stronger Bead to suit wide variety of rims
- Excellent resistance to lug chipping & rib tearing
- Excellent load carrying capacity



AVAILABLE SIZES:
10.00-20 (16PR)



JET TUFF

Offers Longer Life, Excellent Durability In All Wheel Fitment Position

SALIENT FEATURES

- Wide tread rib with deep tread
- Specially developed tread compound
- Superior casing

BENEFITS

- High mileage & smooth wear
- Excellent load carrying capacity & retreadability
- Resistance to tread cuts, lug chipping & rib tear



AVAILABLE SIZES:
9.00-20 (16PR), 10.00-20 (16PR/18PR)



TRAK TUF DX

Offers Longer Life And Excellent Durability In All Wheel Fitment Position

SALIENT FEATURES

- Strong shoulder lugs and center ribs
- Deep treads with wider shoulder opening
- Special material for strong casing

BENEFITS

- Good loading capability and excellent performance in on/off road application
- Longer life with cooler running
- High structural durability and performance



AVAILABLE SIZES:
9.00-20 (16PR)



POWERTRAK

Offers Longer Life In On/Off Road Application For All Wheel Position

SALIENT FEATURES

- Strong shoulder lugs and center ribs
- Deep treads, bigger buttress window
- Specially reinforced sidewall

BENEFITS

- Good loading capability and excellent performance in on/off road application
- Longer life with cooler running
- Protection against curbs and side hits



AVAILABLE SIZES:

12.00-24 (18PR)



JET-TRAK DX

High Casing Reliability And Heavy Load Conditions

SALIENT FEATURES

- Super strong nylon casing
- Super strong beads
- Pyramid lug design

BENEFITS

- Excellent load carrying capability and reliability
- Better anchorage, high bead area
- Free from lug chipping & tearing, better part worn appearance



AVAILABLE SIZES:

10.00-20 (16PR)



JET-TRAK

Offers Excellent Combination Of Mileage & Structure For Moderate To Heavy Load

SALIENT FEATURES

- Special tread compound with strong rubber matrix
- Strong and clean casing
- Broad Pyramid-type lugs
- Reinforced bead construction with excellent profile

BENEFITS

- Very good mileage
- Good load carrying capability with good re-sale value for casing
- Excellent support while carrying load
- Low heat development in Bead region



AVAILABLE SIZES:

8.25-20 (14PR), 9.00-20 (14PR/16PR), 10.00-20 (16PR), 11.00-20 (18PR)



JET-TRAK XT

Offers Superior Mileage And Structural Durability In Heavy Duty Application

SALIENT FEATURES

- Special tread compound with strong rubber matrix
- Strong casing
- U-Lug type tread pattern
- Cooler running rubber compound

BENEFITS

- Very good mileage
- Good load carrying capability
- Excellent mileage and improved traction
- Longer life and high durability



AVAILABLE SIZES:

12.00-24 (18PR)



JET-TRAK 39 XTRA

High Casing Reliability And Longer Life In Super Heavy Load Conditions

SALIENT FEATURES

- Super strong nylon casing with closely packed cords
- Super strong beads
- Special dual tread compound mix combined with a unique lug geometry

BENEFITS

- Excellent load carrying capability and casing reliability
- Excellent anchorage
- Cooler running and high mileage



AVAILABLE SIZES:

10.00-20 (18PR)



JET XTRA

Premium Mileage With Load Carrying Capacity

SALIENT FEATURES

- High NSD, wider center rib with extra tread rubber
- Big and broad design
- Tough Nylon casing

BENEFITS

- Premium mileage
- Good load carrying capacity
- High reliability



AVAILABLE SIZES:

8.25-20 (16PR), 10.00-20 (16PR), 11.00-20 (16PR)



JET TRAK 39 XTRA DX

Offers Good Mileage For Super Heavy Load

SALIENT FEATURES

- Super strong Nylon casing with closely packed cords
- Specially designed Bead profile
- Special Dual tread compound with a unique Lug geometry

BENEFITS

- Good load carrying capacity and casing reliability
- Stronger Bead area minimizing Bead failures
- Cooler running and high mileage



AVAILABLE SIZES:

10.00-20 (16PR)



JET XTRA LOAD

Excellent Tyre For Heavy Load Application And With Good Durability

SALIENT FEATURES

- Strong and clean casing
- Reinforced Bead construction
- Wide tread arc width
- Special tread compound with strong rubber mix

BENEFITS

- Good load carrying capacity with high casing reliability
- Good anchorage giving good bead area performance
- Most optimum footprint pressure distribution due to wide contact patch
- Good mileage & cooler running



AVAILABLE SIZES:

10.00-20 (18PR), 11.00-20 (18PR)



JET ONE

High NSD For Extra Premium Mileage

SALIENT FEATURES

- High NSD of 25mm
- Computer-designed twin lugs with a connecting chain at shoulder
- Bigger and broader in dimension with strong casing

BENEFITS

- Extra premium mileage
- Lesser lug flexing and lower heat generation
- Excellent overall performance



AVAILABLE SIZES:

10.00-20 (16PR), 11.00-20 (16PR)



JETKING 10

Offers Excellent Mileage And Retreadability In Normal To Moderate Load Application

SALIENT FEATURES

- Wide center rib with more tread rubber
- Superior nylon casing
- Strong pyramid type lugs
- Optimized mix of tread depth, casing and lug geometry

BENEFITS

- Excellent mileage
- Excellent retreadability
- Very good road contact and support
- Excellent overall performance



AVAILABLE SIZES:

10.00-20 (16PR)



JETKING

Offers Superior Combination Of Mileage And Structural Durability

SALIENT FEATURES

- Special tread compound with strong rubber matrix
- Strong casing
- Broad Pyramid type lugs

BENEFITS

- Very good mileage
- Good load carrying capability
- Excellent support while carrying load



AVAILABLE SIZES:

11.00-20 (16PR/18PR), 12.00-20 (18PR)



JETKING DX


Offers Superior Mileage And Structural Durability In Heavy Duty Application

SALIENT FEATURES

- Special tread compound with strong rubber matrix
- Strong casing
- Broad pyramid-type lugs
- Cooler running rubber compound

BENEFITS

- Very good mileage
- Good load carrying capability
- Excellent support while carrying load
- Longer life and high durability

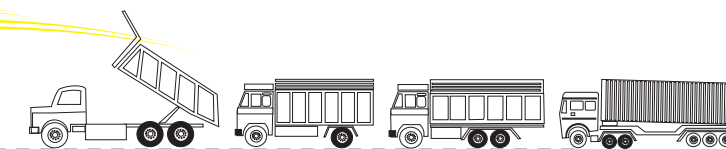

AVAILABLE SIZES:

12.00-24 (18PR)



JET RIB

SPECIFICATIONS

Size	LR/PR	Max Speed KMPH# /SI	Rim (In)	Maximum Outer Diameter		Maximum Section Width		Tread Depth		App. Flaps	Maximum Tyre Load (Single)				Maximum Tyre Load (Dual)			
				Load		Pressure*		Load			Pressure*		Load		Pressure*			
				Kgs	Lbs	kPa	PSI	Kgs	Lbs		kPa	PSI	Kgs	Lbs	kPa	PSI		
9.00-20	H/16	100 / J	7.0	1046	41.2	274	10.8	16.5	20.8	20 N	2650	5840	795	115	2325	5125	725	105
10.00-20	H/16	110 / K	7.5	1081	42.6	290	11.4	17.3	21.8	20 N	3000	6610	795	115	2650	5840	725	105
10.00-20	J/18	110 / K	7.5	1081	42.6	290	11.4	17.3	21.8	20 N	3075	6780	825	120	2720	6005	760	110

JET R MILES

SPECIFICATIONS

Size	LR/PR	Max Speed KMPH# /SI	Rim (In)	Maximum Outer Diameter		Maximum Section Width		Tread Depth		App. Flaps	Maximum Tyre Load (Single)				Maximum Tyre Load (Dual)			
				Load		Pressure*		Load			Pressure*		Load		Pressure*			
				Kgs	Lbs	kPa	PSI	Kgs	Lbs		kPa	PSI	Kgs	Lbs	kPa	PSI		
8.25-20	H/16	100 / J	6.5	1006	39.6	247	9.7	15.5	19.5	20 M	2300	5070	825	120	2000	4410	760	110
10.00-20	H/16	100 / J	7.5	1094	43.1	292	11.5	19.4	24.4	20 N	3000	6610	795	115	2630	5800	725	105
11.00-20	H/16	100 / J	8.0	1130	44.5	306	12.0	19.4	24.4	20 RR	3265	7200	795	115	2865	6320	725	105

JET RIB-CX

SPECIFICATIONS

Size	LR/PR	Max Speed KMPH# /SI	Rim (In)	Maximum Outer Diameter		Maximum Section Width		Tread Depth		App. Flaps	Maximum Tyre Load (Single)				Maximum Tyre Load (Dual)			
				Load		Pressure*		Load			Pressure*		Load		Pressure*			
				Kgs	Lbs	kPa	PSI	Kgs	Lbs		kPa	PSI	Kgs	Lbs	kPa	PSI		
8.25-20	G/14	110 / K	6.5	1006	39.6	253	10.0	14.5	18.3	20 M	2240	4940	795	115	2000	4410	725	105
8.25-20	H/16	100 / J	6.5	1006	39.6	253	10.0	14.5	18.3	20 M	2300	5070	825	120	2000	4410	760	110

JET ACE

SPECIFICATIONS

Size	LR/PR	Max Speed KMPH# /SI	Rim (In)	Maximum Outer Diameter		Maximum Section Width		Tread Depth		App. Flaps	Maximum Tyre Load (Single)				Maximum Tyre Load (Dual)			
				Load		Pressure*		Load			Pressure*		Load		Pressure*			
				Kgs	Lbs	kPa	PSI	Kgs	Lbs		kPa	PSI	Kgs	Lbs	kPa	PSI		
10.00-20	J/18	90 / G	7.5	1088	42.8	293	11.5	17.0	21.4	20 N	3080	6790	825	120	2700	5950	760	110

JET RIB DX

SPECIFICATIONS

Size	LR/PR	Max Speed KMPH# /SI	Rim (In)	Maximum Outer Diameter		Maximum Section Width		Tread Depth		App. Flaps	Maximum Tyre Load (Single)				Maximum Tyre Load (Dual)			
				Load		Pressure*		Load			Pressure*		Load		Pressure*			
				Kgs	Lbs	kPa	PSI	Kgs	Lbs		kPa	PSI	Kgs	Lbs	kPa	PSI		
10.00-20	H/16	110/K	7.5	1081	42.6	290	11.4	17	21.4	20N	3000	6615	790	115	2800	6175	720	105

FLEET KING

SPECIFICATIONS

Size	LR/PR	Max Speed KMPH# /SI	Rim (In)	Maximum Outer Diameter		Maximum Section Width		Tread Depth		App. Flaps	Maximum Tyre Load (Single)				Maximum Tyre Load (Dual)			
				Load		Pressure*		Load			Pressure*		Load		Pressure*			
				Kgs	Lbs	kPa	PSI	Kgs	Lbs		kPa	PSI	Kgs	Lbs	kPa	PSI		
8.25-20	G/14	110 / K	6.5	983	38.7	243	9.6	12.3	15.5	20 M	2240	4940	795	115	2000	4410	725	105
9.00-20	G/14	110 / K	7.0	1050	41.3	277	10.9	14.9	18.8	20 N	2575	5675	760	110	2300	5070	690	100
10.00-20	H/16	110 / K	7.5	1074	42.3	289	11.4	15.1	19.0	20 N	3000	6610	795	115	2650	5840	725	105
11.00-20	H/16	110 / K	8.0	1093	43.0	305	12.0	15.6	19.7	20 RR	3350	7390	795	115	2900	6395	725	105

JET R PLUS

SPECIFICATIONS

Size	LR/PR	Max Speed KMPH# /SI	Rim (In)	Maximum Outer Diameter		Maximum Section Width		Tread Depth		App. Flaps	Maximum Tyre Load (Single)				Maximum Tyre Load (Dual)			
				Load		Pressure*		Load			Pressure*		Load		Pressure*			
				Kgs	Lbs	kPa	PSI	Kgs	Lbs		kPa	PSI	Kgs	Lbs	kPa	PSI		
10.00-20	H/16	100 / J	7.5	1079	42.5	288	11.3	17.0	21.4	20 N	3000	6610	795	115	2630	5800	725	105
11.00-20	H/16	100 / J	8.0	1112	43.8	304	12.0	17.8	22.4	20 RR	3265	7200	795	115	2865	6320	725	105
10.00-20	J/18	90/G	7.5	1081	42.6	290	11.4	17.0	21.4	20N	3080	6780	825	120	2700	6005	760	110

FLEETKING-100

SPECIFICATIONS

Size	LR/PR	Max Speed KMPH# /SI	Rim (In)	Maximum Outer Diameter		Maximum Section Width		Tread Depth		App. Flaps	Maximum Tyre Load (Single)				Maximum Tyre Load (Dual)			
				Load		Pressure*		Load			Pressure*		Load		Pressure*			
				Kgs	Lbs	kPa	PSI	Kgs	Lbs		kPa	PSI	Kgs	Lbs	kPa	PSI		
9.00-20	G/14	110 / K	7.0	1040	40.9	274	10.8	13.0	16.4	20 N	2575	5675	760	110	2300	5070	690	100



HI-WAY KING

SPECIFICATIONS

Size	LR/PR	Max Speed KMPH# /SI	Rim (In)	Maximum Outer Diameter		Maximum Section Width		Tread Depth		App. Flaps	Maximum Tyre Load (Single)				Maximum Tyre Load (Dual)			
				Load		Pressure*		Load			Pressure*		Load		Pressure*			
				Kgs	Lbs	kPa	PSI	Kgs	Lbs		kPa	PSI	Kgs	Lbs	kPa	PSI		
12.00-20	J/18	110 / K	8.5	1144	45.0	319	12.6	15.2	19.1	20 RR	3750	8270	795	115	3350	7390	725	105
11.00-22	H/16	100 / J	8.0	1146	45.1	303	11.9	13.2	16.6	22 RR	3550	7830	795	115	3075	6780	725	105

JET TUFF

SPECIFICATIONS

Size	LR/PR	Max Speed KMPH# /SI	Rim (In)	Maximum Outer Diameter		Maximum Section Width		Tread Depth		App. Flaps	Maximum Tyre Load (Single)				Maximum Tyre Load (Dual)			
				Load		Pressure*		Load			Pressure*		Load		Pressure*			
				Kgs	Lbs	kPa	PSI	Kgs	Lbs		kPa	PSI	Kgs	Lbs	kPa	PSI		
9.00-20	H/16	100 / J	7.0	1065	41.9	274	10.8	20.5	25.8	20 N	2650	5840	795	115	2325	5125	725	105
10.00-20	H/16	100 / J	7.5	1086	42.8	286	11.3	22.0	27.7	20 N	3000	6610	795	115	2630	5800	760	110
10.00-20	J/18	100 / K	7.5	1088	42.8	288	11.3	22.0	27.7	20 N	3080	6780	825	120	2700	6005	760	110

TRAK TUF DX

SPECIFICATIONS

Size	LR/PR	Max Speed KMPH# /SI	Rim (In)	Maximum Outer Diameter		Maximum Section Width		Tread Depth		App. Flaps	Maximum Tyre Load (Single)				Maximum Tyre Load (Dual)			
				Load		Pressure*		Load			Pressure*		Load		Pressure*			
				Kgs	Lbs	kPa	PSI	Kgs	Lbs		kPa	PSI	Kgs	Lbs	kPa	PSI		
9.00-20	H/16	110 / K	7.0	1055	41.5	272	10.7	20.7	26.1	20 N	2650	5840	795	115	2360	5200	725	105

POWER TRAK

SPECIFICATIONS

Size	LR/PR	Max Speed KMPH# /SI	Rim (In)	Maximum Outer Diameter		Maximum Section Width		Tread Depth		App. Flaps	Maximum Tyre Load (Single)				Maximum Tyre Load (Dual)			
				Load		Pressure*		Load			Pressure*		Load		Pressure*			
				Kgs	Lbs	kPa	PSI	Kgs	Lbs		kPa	PSI	Kgs	Lbs	kPa	PSI		
12.00-24	J/18	110 / K	8.5	1271	50	327	12.9	21.2	26.7	24 RR	4250	9370	795	115	3750	8270	725	105



JET-TRAK

SPECIFICATIONS

Size	LR/PR	Max Speed KMPH# /SI	Rim (In)	Maximum Outer Diameter		Maximum Section Width		Tread Depth		App. Flaps	Maximum Tyre Load (Single)				Maximum Tyre Load (Dual)			
				Load		Pressure*		Load			Pressure*		Load		Pressure*			
				Kgs	Lbs	kPa	PSI	Kgs	Lbs		kPa	PSI	Kgs	Lbs	kPa	PSI		
8.25-20	G/14	110 / K	6.5	1016	40.0	249	9.8	21.5	27.1	20 M	2240	4940	795	115	2000	4410	725	105
9.00-20	G/14	110 / K	7.0	1054	41.5	272	10.7	22.2	28.0	20 N	2575	5675	760	110	2300	5070	690	100
9.00-20	H/16	110 / K	7.0	1054	41.5	273	10.7	22.2	28.0	20 N	2650	5840	795	115	2360	5205	725	105
10.00-20	H/16	110 / K	7.5	1084	42.7	288	11.3	22.1	27.8	20 N	3000	6610	795	115	2650	5840	725	105
11.00-20	J/18	110 / K	8.0	1112	43.7	303	11.9	23.0	29.0	20 RR	3355	7550	825	120	2945	6580	760	110

JET-TRAK DX

SPECIFICATIONS

Size	LR/PR	Max Speed KMPH# /SI	Rim (In)	Maximum Outer Diameter		Maximum Section Width		Tread Depth		App. Flaps	Maximum Tyre Load (Single)				Maximum Tyre Load (Dual)			
				Load		Pressure*		Load			Pressure*		Load		Pressure*			
				Kgs	Lbs	kPa	PSI	Kgs	Lbs		kPa	PSI	Kgs	Lbs	kPa	PSI		
10.00-20	J/18	90 / G	7.5	1072	42.2	284	11.2	22.2	28.0	20 N	3080	6790	825	120	2700	5950	760	110

JET-TRAK XT

SPECIFICATIONS

Size	LR/PR	Max Speed KMPH# /SI	Rim (In)	Maximum Outer Diameter		Maximum Section Width		Tread Depth		App. Flaps	Maximum Tyre Load (Single)				Maximum Tyre Load (Dual)			
				Load		Pressure*		Load			Pressure*		Load		Pressure*			
				Kgs	Lbs	kPa	PSI	Kgs	Lbs		kPa	PSI	Kgs	Lbs	kPa	PSI		
12.00-24	J/18	110 / K	8.5	1258	49.5	324	12.8	20.8	26.2	24 RR	4250	9370	795	115	3750	8270	725	105

JET-TRAK 39 XTRA

SPECIFICATIONS

Size	LR/PR	Max Speed KMPH# /SI	Rim (In)	Maximum Outer Diameter		Maximum Section Width		Tread Depth		App. Flaps	Maximum Tyre Load (Single)				Maximum Tyre Load (Dual)			
				Load		Pressure*		Load			Pressure*		Load		Pressure*			
				Kgs	Lbs	kPa	PSI	Kgs	Lbs		kPa	PSI	Kgs	Lbs	kPa	PSI		
10.00-20	J/18	90 / G	7.5	1094	43.1	293	11.5	22.6	28.5	20 N	3080	6790	825	120	2700	5950	760	110

JETTRAK 39 XTRA DX

SPECIFICATIONS

Size	LR/PR	Max Speed KMPH# /SI	Rim (In)	Maximum Outer Diameter		Maximum Section Width		Tread Depth		App. Flaps	Maximum Tyre Load (Single)				Maximum Tyre Load (Dual)			
				Load		Pressure*		Load			Pressure*		Load		Pressure*			
				Kgs	Lbs	kPa	PSI	Kgs	Lbs		kPa	PSI	Kgs	Lbs	kPa	PSI		
10.00-20	H/16	90/G	7.5	1096	43.1	295	11.6	22.6	28.5	20N	3000	6615	790	115	2800	6175	720	105





JET XTRA

SPECIFICATIONS

Size	LR/PR	Max Speed KMPH# /SI	Rim (In)	Maximum Outer Diameter		Maximum Section Width		Tread Depth		App. Flaps	Maximum Tyre Load (Single)				Maximum Tyre Load (Dual)			
				mm	In	mm	In	mm	32nds		Load		Pressure*		Load		Pressure*	
											Kgs	Lbs	kPa	PSI	Kgs	Lbs	kPa	PSI
8.25-20	H/16	100 / J	6.5	1016	40.0	247	9.7	23.0	29.0	20 M	2300	5070	825	120	2000	4410	760	110
10.00-20	H/16	100 / J	7.5	1082	42.6	288	11.3	23.0	29.0	20 N	3000	6610	795	115	2630	5800	760	110
11.00-20	H/16	100 / J	8.0	1113	43.8	304	12.0	23.6	29.7	20 RR	3265	7200	795	115	2865	6320	725	105

JET XTRA LOAD

SPECIFICATIONS

Size	LR/PR	Max Speed KMPH# /SI	Rim (In)	Maximum Outer Diameter		Maximum Section Width		Tread Depth		App. Flaps	Maximum Tyre Load (Single)				Maximum Tyre Load (Dual)			
				mm	In	mm	In	mm	32nds		Load		Pressure*		Load		Pressure*	
											Kgs	Lbs	kPa	PSI	Kgs	Lbs	kPa	PSI
10.00-20	J/18	90/G	7.5	1084	42.7	288	11.3	22.1	27.8	20N	3080	6780	825	120	2700	6005	760	110
11.00-20	J/18	100/K	8.0	1110	43.7	301	11.9	23	29.0	20RR	3355	7550	825	120	2945	6580	760	110

JET ONE

SPECIFICATIONS

Size	LR/PR	Max Speed KMPH# /SI	Rim (In)	Maximum Outer Diameter		Maximum Section Width		Tread Depth		App. Flaps	Maximum Tyre Load (Single)				Maximum Tyre Load (Dual)			
				mm	In	mm	In	mm	32nds		Load		Pressure*		Load		Pressure*	
											Kgs	Lbs	kPa	PSI	Kgs	Lbs	kPa	PSI
10.00-20	H/16	100 / J	7.5	1086	42.8	288	11.3	25.0	31.5	20 N	3000	6610	795	115	2630	5800	725	105
11.00-20	H/16	100 / J	8.0	1130	44.5	306	12.0	25.3	31.9	20 RR	3265	7200	795	115	2865	6320	725	105

JET KING

SPECIFICATIONS

Size	LR/PR	Max Speed KMPH# /SI	Rim (In)	Maximum Outer Diameter		Maximum Section Width		Tread Depth		App. Flaps	Maximum Tyre Load (Single)				Maximum Tyre Load (Dual)			
				mm	In	mm	In	mm	32nds		Load		Pressure*		Load		Pressure*	
											Kgs	Lbs	kPa	PSI	Kgs	Lbs	kPa	PSI
11.00-20	H/16	110 / K	8.0	1096	43.1	300	11.8	22.6	28.5	20 RR	3350	7390	795	115	2900	6395	725	105
11.00-20	J/18	110 / K	8.0	1096	43.1	300	11.8	22.6	28.5	20 RR	3425	7550	825	120	2985	6580	760	110
12.00-20	J/18	110 / K	8.5	1154	45.4	324	12.8	22.0	27.7	20 RR	3750	8270	795	115	3350	7390	725	105

JET KING-10

SPECIFICATIONS

Size	LR/PR	Max Speed KMPH# /SI	Rim (In)	Maximum Outer Diameter		Maximum Section Width		Tread Depth		App. Flaps	Maximum Tyre Load (Single)				Maximum Tyre Load (Dual)			
				mm	In	mm	In	mm	32nds		Load		Pressure*		Load		Pressure*	
											Kgs	Lbs	kPa	PSI	Kgs	Lbs	kPa	PSI
10.00-20	H/16	100 / J	7.5	1085	42.7	286	11.3	22.3	28.1	20 N	3000	6610	795	115	2650	5840	725	105

JET KING DX

SPECIFICATIONS

Size	LR/PR	Max Speed KMPH# /SI	Rim (In)	Maximum Outer Diameter		Maximum Section Width		Tread Depth		App. Flaps	Maximum Tyre Load (Single)				Maximum Tyre Load (Dual)			
				mm	In	mm	In	mm	32nds		Load		Pressure*		Load		Pressure*	
											Kgs	Lbs	kPa	PSI	Kgs	Lbs	kPa	PSI
12.00-24	J/18	110 / K	8.5	1258	49.5	323	12.7	21.9	27.6	24 RR	4250	9370	795	115	3750	8270	725	105



OFF-THE-ROAD
TYRES





VEM 99

Extra Deep Tread Provides Longer Tyre Life

SALIENT FEATURES

- Standard depth & deep tread depth, double chevron FLUSH pattern
- Use of special composition for tread compound
- Large tread width design with aggressive pattern and strong casing
- Tread center region adequately supported with additional reinforcement

BENEFITS

- Self cleaning tyre with specially designed tread grooves to extract stone & mud for better traction
- Helps in cooler running of tyre & provides protection against cuts & bruises under severe conditions
- Good stability, excellent mileage and high load-carrying capacity
- Lesser heat generation due to reduced flexing of lugs

AVAILABLE SIZES:

18.00-25, 17.5-25, 20.5-25, 23.5-25, 26.5-25, 29.5-25



VEM 027

Tyre With Wider Contact Area & Higher Traction

SALIENT FEATURES

- Specially designed pattern using advanced FEA and simulation techniques
- Big and Broader lugs with higher Contact Area
- Special dual tread compound mix & heat resistance under tread
- Super strong nylon casing with closely packed cords
- Super strong beads

BENEFITS

- Good traction & improved FLUSH action, provides long service life
- Higher Initial Tread Mileage & optimized contact pressure distribution
- Cooler running & better cut resistance
- Good load carrying capability and casing reliability
- Excellent anchorage

AVAILABLE SIZES:

18.00-33, 21.00-35



VEM 045

Robust Tyre With Broad Lugs & Added Reinforcement At Lug Base For Mining Application

SALIENT FEATURES

- Tread pattern developed using high-end computational simulations
- New-age SILICA based dual tread compound
- Strong nylon construction with a high denier fabric
- Super connecting reinforcement at lug bottom in shoulder region

BENEFITS

- Excellent traction, flushing and contact pressure distribution
- Excellent cut-resistance and cooler running
- Excellent casing strength and reliability during impact
- Strong bead construction
- Lesser heat generation due to less flexing of lugs

AVAILABLE SIZES:

18.00-33, 21.00-35, 24.00-35, 24.00-49, 27.00-49, 30.00-51, 33.00-51, 36.00-51, 40.00-57



VEM SMOOTH (NHS)

For Tippers/Mining/Logging

SALIENT FEATURES

- Extra deep smooth tread design
- Tough nylon casing
- Extra strong triple bead construction
- Wear resistant and low heat dissipating tread compound

BENEFITS

- Provides good handling and higher tread life.
- Good resistance to external damages
- Extra load carrying capability and excellent casing reliability
- Provides very good anchorage of tyre on rim and uniform pressure distribution all along bead and rim interference
- Cooler running and extra service life

AVAILABLE SIZES:

9.00-20 NHS

VEM 99

SPECIFICATIONS

Tyre Size	Tyre Code	Application	Ply Rating	Type	Rim Size		Unloaded Inflated tyre Dimensions			Load Capacity (Kgs.)			
					Recommended Rim size	Alternate Rim size	Max. Overall Diameter	Max. Section Width	Tread Depth	Transport - 50 Kmph upto 4Km. (One way)		Loading - 10 Kmph upto 76 Mtr. (One way)	
										Max Load	Inflation pr.	Max Load	Inflation pr.
					(inches)	(inches)	(mm.)	(mm.)	(mm.)	(kgs)	(kpa)	(kgs)	(kpa)
18.00-25	E3	35 Ton Rigid Dump trucks/Sprinklers	32	TT / TL	13.00/2.5	-	1625	510	32.0	8750	575	15000	750
18.00-25	E4	35 Ton Rigid Dump trucks/Sprinklers	12	TL	13.00/2.5	-	1625	510	32.0	4750	200	8250	275
18.00-25	E4	35 Ton Rigid Dump trucks/Sprinklers	32 40	TL	13.00/2.5	-	1673	499	56.0	8750 9750	575 700	15000 17000	750 950
17.5-25	L3	Wheel Loaders	20	TL	14.00/1.5	-	1370	460	29.0	5000	400	8250	575
20.5-25	E 3 / L3	Wheel Loaders	20	TL	17.00/2.0	-	1505	535	32.5	6000	325	9500	450
23.5-25	L3	Wheel Loaders	20	TL	19.00/2.5	-	1640	630	37.5	7300	300	10900	375
26.5-25	E 3 / L3	Wheel Loaders	28	TL	22.00/3.0	-	1740	700	36.5	10000	350	15500	475
29.5-25	E 3 / L3	Wheel Loaders	28	TL	25.00/3.5	-	1870	780	39.0	11500	325	17500	425

VEM 045

SPECIFICATIONS

Tyre Size	Tyre Code	Application	Ply Rating	Type	Rim Size		Unloaded Inflated tyre Dimensions			Load Capacity (Kgs.)			
					Recommended Rim size	Alternate Rim size	Max. Overall Diameter	Max. Section Width	Tread Depth	Transport - 50 Kmph upto 4Km. (One way)		Loading - 10 Kmph upto 76 Mtr. (One way)	
										Max Load	Inflation pr.	Max Load	Inflation pr.
					(inches)	(inches)	(mm.)	(mm.)	(mm.)	(kgs)	(kpa)	(kgs)	(kpa)
18.00-33	E4	Reach Stakers/40 Ton Rigid dump trucks	36	TL	13.00/2.5	-	1880	528	57.0	10600	625	18500	850
21.00-35	E4	50 Ton Rigid dump trucks	36	TL	15.00/3.0	-	2060	595	57.0	12850	550	23000	750
24.00-35	E4	65 Ton Rigid dump trucks	48	TL	17.00/3.5	-	2190	663	57.0	18500	650	31500	850
24.00-49	E4	85 Ton Rigid dump trucks	48	TL	17.00/3.5	-	2560	683	59.0	21800	650	37500	850
27.00-49	E4	100 Ton Rigid dump trucks	48	TL	19.50/4.0	-	2718	775	69.0	25000	575	43750	775
			54	TL						27250	650	45000	825
30.00-51	E4	120 Ton Rigid dump trucks	46	TL	22.00/4.5	-	2920	860	82.0	29000	500	48750	650
			52	TL						30000	550	53000	750
33.00-51	E4	150 Ton Rigid dump trucks	58	TL	24.00/5.0	-	3076	935	83.0	35500	575	61500	750
36.00-51	E4	170 Ton Rigid dump trucks	58	TL	26.00/5.0	-	3255	1035	82.0	41250	525	71000	675
40.00-57	E4	240 Ton Rigid dump trucks	68	TL	29.00/6.0	-	3541	1135	62.0	54500	550	92500	725
40.00-57	E4	240 Ton Rigid dump trucks	60	TL	29.00/6.0	-	3605	1130	83.0	50000	475	87500	650
			68	TL						54500	550	92500	725

VEM 027

SPECIFICATIONS

Tyre Size	Tyre Code	Application	Ply Rating	Type	Rim Size		Unloaded Inflated tyre Dimensions			Load Capacity (Kgs.)			
					Recommended Rim size	Alternate Rim size	Max. Overall Diameter	Max. Section Width	Tread Depth	Transport - 50 Kmph upto 4Km. (One way)		Loading - 10 Kmph upto 76 Mtr. (One way)	
										Max Load	Inflation pr.	Max Load	Inflation pr.
					(inches)	(inches)	(mm.)	(mm.)	(mm.)	(kgs)	(kpa)	(kgs)	(kpa)
18.00-33	E4	40 Ton Rigid dump trucks	32	TL	13.00/2.5	-	1880	505	57.0	10000	575	17500	750
			36	TL						10600	625	18500	850
21.00-35	E4	50 Ton Rigid dump trucks	36	TL	15.00/3.0	-	2060	595	57.0	12850	550	23000	750
			40	TL						14000	625	24300	825

VEM SMOOTH (NHS)

SPECIFICATIONS

Tyre Size	Tyre Code	Application	Ply Rating	Type	Rim Size		Unloaded Inflated tyre Dimensions			Load Capacity (Kgs.)			
					Width	Flange ht.	Max. Overall Diameter	Max. Section Width	Tread Depth	Inflation pr. (kPa)	25 KMPH	10 KMPH	Static
											Max Load (kgs.)	Max Load (kgs.)	Max Load (kgs.)
(inches)	(inches)	(mm.)	(mm.)	(mm.)		(kgs.)	(kgs.)	(kgs.)					
9.00-20	VEM SMOOTH	NHS	16	TT	7	-	1048	271	22.0	725	3170	3965	6340



V-BH PLUS

Excellent Tyre For Industrial Application With Resistance To Buckling, Tearing & Cracking

SALIENT FEATURES

- Directional pattern optimized through advanced simulation techniques, with extensive overlap at center
- Wide and flat tread with big and broad lugs
- Tread reinforcing bar between lugs at center
- Lugs with heavy buttressed design
- Specially formulated compound and rugged nylon casing

BENEFITS

- Excellent traction and good resistance to buckling, tearing and cracking
- Excellent support and stability with high load carrying capacity
- Outstanding puncture and damage resistance
- Strengthened and stabilized treads under severe operating conditions
- Improved tread life and enhanced traction
- Resistance to cuts, chips, bruises and abrasions

AVAILABLE SIZES:

16.9-28 (12PR)



EG 04 DX

Wide Based Tire Designed For Good Traction & Stability. Ideal For Front End Loader & Motor Grader Operations On Dirt & Soft Soil

SALIENT FEATURES

- Open tread pattern design with effective center overlap
- Specially formulated tread compound
- Exclusively simulated bead construction
- Heavy duty nylon carcass construction

BENEFITS

- Generates good traction, self-cleaning and excellent directional stability
- For better resistance to cuts, wears and longer life
- Uniform pressure distribution all along the bead and rim interference showing good anchorage of the tire on the rim
- Provides good resistance to buckling, tearing and cracking alongwith good load carrying capacity

AVAILABLE SIZES:

17.5-25 (16PR)



VEM AS

Extra Tough Carcass & Bead Construction

SALIENT FEATURES

- Specially designed pattern using advanced FEA and simulation techniques
- Rock flush pattern and shoulder protector
- Wear resistant & low heat dissipating tread compounds
- Non-directional tread pattern
- Simulated bead and carcass constructions under virtual physical conditions

BENEFITS

- Suitable for heavy duty service & provides excellent hauling over rock, coal and log-strewn terrain
- Provides excellent cut resistance for both tread and sidewall
- Provides excellent protection against cuts & bruises under severe conditions alongwith cooler running
- Provides self-cleaning and flotation on soft and muddy surfaces
- Good load-carrying capability and casing reliability

AVAILABLE SIZES:

14.00-24 (20PR/28PR), 14.00-25 (20PR/24PR)



EG 04

High Traction & Directional Stability For Motor Graders & Mobile Hydraulic Cranes

SALIENT FEATURES

- Optimized directional lug pattern with tapered lugs & with rugged center block
- Specially developed tread compound
- Heavy duty nylon carcass construction
- Exclusively simulated bead construction.

BENEFITS

- Self-cleaning and excellent directional stability as it digs through the terrains
- For better resistance to cuts, wear & longer life
- Along with the distinctive tread pattern, tough nylon casing gives good resistance to buckling, tearing & cracking
- Uniform pressure distribution all along the bead and rim interference showing good anchorage of the tire on the rim.

AVAILABLE SIZES:

13.00-24 (12PR), 14.00-24 (12PR/16PR)



INDUSTRIAL DX I-3

Suitable For Off-Road And Tough Industrial Application And Good Life

SALIENT FEATURES

- Optimized directional lug pattern with "Tapered lugs" & rugged center block
- Specially developed tread compound
- Heavy duty nylon carcass construction
- Exclusively simulated bead construction

BENEFITS

- Self cleaning and excellent directional stability as it digs through the terrains
- For better resistance to cuts, wear & longer life
- Along with the distinctive tread pattern, tough nylon casing gives good resistance to buckling, tearing & cracking
- Uniform pressure distribution all along the bead and rim interference showing good anchorage of the tire on the rim

AVAILABLE SIZES:

12.5/80-18 (12PR)

VBH PLUS

SPECIFICATIONS

Tyre Size	Tyre Code	Application	Ply Rating	Type	Rim Size		Unloaded Inflated tyre Dimensions			Load Capacity (Kgs.)	
					Width	Max. Overall Diameter	Max. Section Width	Tread Depth	40 KMPH MAX		
									Max Load	Inflation pr.	
(inches)	(mm.)	(mm.)	(mm.)	(kgs)	(kpa)						
16.9-28	R4	Backhoe Loader and Industrial	12	TL	DW15L	1435	454	33.5	3550	260	
16.9-28	IND	Backhoe Loaders/Pickup Cranes	12	TT	15	1425	448	33.5	3550	260	

VEM AS

SPECIFICATIONS

Tyre Size	Tyre Code	Application	Ply Rating	Type	Rim Size		Unloaded Inflated tyre Dimensions			Load Capacity (Kgs.)			
					Recommended Rim size	Alternate Rim size	Max. Overall Diameter	Max. Section Width	Tread Depth	Transport - 50 Kmph upto 4Km. (One way)		Loading - 10 Kmph upto 76 Mtr. (One way)	
										Max Load	Inflation pr.	Max Load	Inflation pr.
(inches)	(inches)	(mm.)	(mm.)	(mm.)	(kgs)	(kpa)	(kgs)	(kpa)					
14.00-24	E 3	Backhoe Loaders/Pickup Cranes	20	TT	10.00W	-	1385	390	26.0	4625	475	8500	700
14.00-24	E 3	Backhoe Loaders/Pickup Cranes	28	TT /TL	10.00W	-	1385	390	26.0	5600	650	10000	925
14.00-25	E 3	Backhoe Loaders/25Ton Dump trucks/Pickup Cranes	20	TT	10.00/1.5	-	1385	390	26.0	4625	475	8500	700
14.00-25	E 3	Backhoe Loaders/25Ton Dump trucks/Pickup Cranes	24	TT	10.00/1.5	-	1385	390	26.0	5150	575	9500	850

EG 04 DX

SPECIFICATIONS

Tyre Size	Tyre Code	Application	Ply Rating	Type	Rim Size		Unloaded Inflated tyre Dimensions			Load Capacity (Kgs.)	
					Recommended Rim size	Alternate Rim size	Max. Overall Diameter	Max. Section Width	Tread Depth	Transport (40 kmph)	
										Max Load	Inflation pr.
(inches)	(inches)	(mm.)	(mm.)	(mm.)	(kgs)	(kpa)					
17.5-25	G 2	Grader/Pickup Cranes	16	TL	14.00/1.5	-	1355	450	24.5	3350	275



VRC-18 R3

Designed For Low Soil Compaction And Extended Life

SALIENT FEATURES

- Wide and flat foot print
- Heavy duty nylon carcass construction
- Optimized tread pattern

BENEFITS

- Increased contact area for better floatation and minimal soil disturbance
- Distinctive tread pattern, with good resistance to buckling, tearing and cracking
- Self-cleaning and floatation on soft and wet soil

AVAILABLE SIZES:

23.1-26 (16PR)

EG 04

SPECIFICATIONS

Tyre Size	Tyre Code	Application	Ply Rating	Type	Rim Size		Unloaded Inflated tyre Dimensions			Load Capacity (Kgs.)	
					Recommended Rim size	Alternate Rim size	Max. Overall Diameter	Max. Section Width	Tread Depth	Transport (40 kmph)	
					(inches)	(inches)	(mm.)	(mm.)	(mm.)	Max Load (kgs)	Inflation pr. (kpa)
13.00-24	G 2	Grader/Pickup Cranes	12	TT	8.00TG	9.00/1.5 (DC), 10.00VA	1320	347	22.0	2725	300
14.00-24	G 2	Grader/Pickup Cranes	12	TT	8.00TG	10.00VA, 10.00WA	1358	375	24.5	3075	250
14.00-24	G 2	Grader/Pickup Cranes	16	TL	10.00VA	10.00W	1358	375	24.5	3650	350

INDUSTRIAL DX 13

SPECIFICATIONS

Tyre Size	Tyre Code	Application	Ply Rating	Type	Rim Size		Unloaded Inflated tyre Dimensions			Load Capacity (Kgs.)	
					Recommended	Alternate	Max. Overall Diameter	Max. Section Width	Tread Depth	40 KMPH MAX	
					(inches)	(inches)	(mm.)	(mm.)	(mm.)	Max Load (kgs)	Inflation pr. (kpa)
12.5/80-18	I 3	Backhoe Loader / Industrial	12	TL	W9	-	991	315	27.5	2650	370

VRC - 18 R3

SPECIFICATIONS

Tyre Size	Tyre Code	Application	Ply Rating	Type	Rim Size		Unloaded Inflated tyre Dimensions			Load Capacity (Kgs.)	
					Width	Flange ht.	Max. Overall Diameter	Max. Section Width	Tread Depth	40 KMPH MAX	
					(inches)	(inches)	(mm.)	(mm.)	(mm.)	Max Load (kgs)	Inflation pr. (kpa)
23.1-26	R3	Compactor	16	TL	DW20A		1598	610	28.0	4375	230



VEM ROCK

For Tipplers/Mining/Logging

SALIENT FEATURES

- Optimized cavity profile and pattern
- Big and broad lugs
- Wide tread grooves with smaller grooves inside
- Specially developed tread and sidewall compound

BENEFITS

- Reduced contact pressure and thereby very less heat development
- Excellent support while carrying load and free from any lug-chipping
- Excellent traction and very good part worn appearance
- Accommodating extreme mining conditions and offering excellent resistance to cuts

AVAILABLE SIZES:

12.00-24 (20PR)



JET ROCK

Specialized Tread Rubber For Mining/Logging

SALIENT FEATURES

- Optimally designed lug geometry with strong and heavy lugs
- Specially designed tread compound
- Super strong nylon casing with high fabric strength
- Computer Aided Design (CAD) tread with optimum footprint pressure distribution

BENEFITS

- Longer tread life
- Very good resistance to cuts and chips
- Excellent reliability
- Smooth and even wear

AVAILABLE SIZES:

9.00-20 (16PR), 10.00-20 (18PR), 11.00-20 (18PR)



JET ROCK XD

Specialized Tread Rubber For Mining/Logging

SALIENT FEATURES

- Computer designed lug geometry for optimum footprint pressure distribution which caters to excellent mileage
- High strength carcass
- Specially designed buttress with excellent self cleaning under dynamic conditions
- Use of cut & heat resistant tread compound

BENEFITS

- Excellent tread life & attractive tread pattern with extra deep lugs
- High load carrying capacity, very strong casing with high fabric strength for multiple retreads
- Increased rate of heat dissipation keeping the tyre free from heat failure
- Better cut and heat resistance even in harsh conditions

AVAILABLE SIZES:

12.00-20(18PR)



JET ROCK XTRA

Born For Mining

SALIENT FEATURES

- Chip resistant and big and broad lugs
- Cut resistant- Specially developed tread and sidewall compound
- Heat resistant- Optimized cavity profile for minimum deflection and less flexing

BENEFITS

- Excellent support for load carrying, free from lug chipping
- Designed for extreme mining conditions and excellent resistance to cuts
- Reduced contact pressure leading to very less heat development

AVAILABLE SIZES:

10.00-20(18PR), 11.00-20(18PR)

VEM ROCK

SPECIFICATIONS

Tyre Size	Tyre Code	Application	Ply Rating	Type	Rim Size		Unloaded Inflated tyre Dimensions			Load Capacity (Kgs.)			
					Recommended Rim size	Alternate Rim size	Max. Overall Diameter	Max. Section Width	Tread Depth	Transport - 50 Kmph upto 4Km. (One way)		Loading - 10 Kmph upto 76 Mtr. (One way)	
										Max Load	Inflation pr.	Max Load	Inflation pr.
(inches)	(inches)	(mm.)	(mm.)	(mm.)	(kgs)	(kpa)	(kgs)	(kpa)					
12.00-24	ML 2	TIPPERS / MINING TRUCKS	20	TT	8.5	8.0, 9.0	1262	332	32.9	3875	300	5600	450

JET ROCK

SPECIFICATIONS

Tyre Size	Tyre Code	Application	Ply Rating	Type	Rim Size		Unloaded Inflated tyre Dimensions			Load Capacity (Kgs.)	
					Recommended Rim size	Alternate Rim size	Max. Overall Diameter	Max. Section Width	Tread Depth	Single	
										Max Load	Inflation pr.
(inches)	(inches)	(mm.)	(mm.)	(mm.)	(kgs)	(kpa)					
9.00-20	ML 2	Underground Mining	16	TT	7.0	6.5, 7.5	1058	271	21.0	2325	725
10.00-20	ML 2	Underground Mining	18	TT	7.5	7.0, 8.0	1086	285	22.0	2780	760
11.00-20	ML 2	Underground Mining	18	TT	8.0	7.5, 8.5	1132	305	22.0	2945	760

JET ROCK XD

SPECIFICATIONS

Tyre Size	Tyre Code	Application	Ply Rating	Type	Rim Size		Unloaded Inflated tyre Dimensions			Load Capacity (Kgs.)	
					Recommended Rim size	Alternate Rim size	Max. Overall Diameter	Max. Section Width	Tread Depth	Single	
										Max Load	Inflation pr.
(inches)	(inches)	(mm.)	(mm.)	(mm.)	(kgs)	(kpa)					
12.00-20	ML 2	Underground Mining	18	TT	8.5	8.0, 9.0	1151	316	28.5	3350	725

JET ROCK XTRA

SPECIFICATIONS

Tyre Size	Tyre Code	Application	Ply Rating	Type	Rim Size		Unloaded Inflated tyre Dimensions			Load Capacity (Kgs.)	
					Recommended Rim size	Alternate Rim size	Max. Overall Diameter	Max. Section Width	Tread Depth	Single	
										Max Load	Inflation pr.
(inches)	(inches)	(mm.)	(mm.)	(mm.)	(kgs)	(kpa)					
10.00-20	ML 2	Underground Mining	18	TT	7.5	7.0, 8.0	1083	284	22.1	2780	760
11.00-20	ML 2	Underground Mining	18	TT	8.0	7.5, 8.5	1123	312	23.5	3000	760

NOTES

A series of horizontal dashed lines for taking notes.

INDUSTRIAL TYRES





VEM SMOOTH

For Reach Stacker Application- Offers High Load Carrying Capacity And Durability

SALIENT FEATURES

- Specially designed heavy duty and sturdy carcass/casing
- Simulated tread profile design
- Premium quality tread compound suitable for underground mining

BENEFITS

- Gives good resistance to impacts
- Improves the durability
- Reliable handling
- Good traction
- Optimised contact area
- Ensures long tyre life
- Provides maximum resistance to stone cuts, penetrations and impacts

AVAILABLE SIZES:

18.00-25 (40PR)



VEM 045 - IND

Designed For Port & Industrial Applications - Offers High Productive Hours

SALIENT FEATURES

- Tread pattern developed using high end computational simulations
- More rubber mass at center and optimized lug groove geometry
- New age SILICA based tread compounds for different service conditions
- Strong nylon construction with a high denier fabric and super strong bead construction

BENEFITS

- Optimized center mass gives a better steerability and life
- Minimizes lug shuffling
- Excellent cut & abrasion resistance with cooler running for extended tyre life
- Excellent casing strength and reliability during impact loads & heavy duty operations

AVAILABLE SIZES:

16.00-25 (32PR), 18.00-33 (36PR/40PR)



VEM 99 - IND

Heavy Load Allowance Capacity

SALIENT FEATURES

- Big and broad lugs with larger contact area
- Tough Nylon casing
- Extra strong triple beads with simulated bead construction
- Wear resistant & low heat dissipating tread compounds

BENEFITS

- Good stability during lifting loads & longer tread life
- Extra load carrying capability and excellent casing reliability
- Very good anchorage of the tire on the rim & uniform pressure distribution all along the bead and rim interference
- Cooler running and extra service life

AVAILABLE SIZES:

18.00-25 (40PR)



PORT CHAMPION IND-4

Best Suitable For Use On Hard Surfaces With Extended Tyre Life

SALIENT FEATURES

- Extra deep tread rubber
- Big and broad lugs with higher rubber at center & larger contact area
- Tough Nylon casing
- Wear resistant & low heat generation compound

BENEFITS

- Provides excellent life
- Good stability during lifting loads & also provides longer tread life and steerability
- Extra load carrying capability and excellent casing reliability
- Cooler running and extra service life

AVAILABLE SIZES:

18.00-25 (40PR)

VEM SMOOTH

SPECIFICATIONS

Tyre Size	Tyre Code	Application	Ply Rating	Type	Rim Size		Unloaded Inflated tyre Dimensions			Load Capacity (Kgs.)			
					Recommended Rim size	Alternate Rim size	Max. Overall Diameter	Max. Section Width	Tread Depth	Transport - 50 Km/h upto 4Km. (One way)		Loading - 10 Km/h upto 76 Mtr. (One way)	
										(inches)	(inches)	(mm.)	(mm.)
18.00-25	L55	Reach Stacker and Underground Mining	40	TL	13.00/2.5	-	1665	535	80.0	NA	NA	17000	950

VEM 99-IND

SPECIFICATIONS

Tyre Size	Tyre Code	Application	Ply Rating	Type	Rim Size		Unloaded Inflated tyre Dimensions			Inflation pr. (kPa)	Load Capacity on Flat & Improved Surfaces			
					Recommended	Alternate	Max. Overall Diameter	Max. Section Width	Tread Depth		25 KMPH	10 KMPH	5 KMPH	Static
											(inches)	(inches)	(mm.)	(mm.)
18.00-25	IND 3	Industrial and Port	40	TL	13.00/2.5	-	1625	510	32.0	1000	21250	22950	24650	30600
18.00-25	IND 4	Industrial and Port	40	TL	13.00/2.5	-	1673	499	56.0	1000	21250	22950	24650	30600

VEM 045

SPECIFICATIONS

Tyre Size	Tyre Code	Application	Ply Rating	Type	Rim Size		Unloaded Inflated tyre Dimensions			Inflation pr. (kPa)	Load Capacity on Flat & Improved Surfaces			
					Recommended	Alternate	Max. Overall Diameter	Max. Section Width	Tread Depth		25 KMPH	10 KMPH	5 KMPH	Static
											(inches)	(inches)	(mm.)	(mm.)
16.00-25	IND 3	Port Application	32	TL	11.25/2.0	-	1510	460	29.5	1000	15625	16875	18125	22500
18.00-33	IND 4	Reach Stackers	36	TL	13.00/2.5	-	1880	528	57.0	1000	23125	24975	26825	33300

Port Champion IND-4

SPECIFICATIONS

Tyre Size	Tyre Code	Application	Ply Rating	Type	Rim Size		Unloaded Inflated tyre Dimensions			Cold Inflation pressure (kPa)	Load Capacity On Flat & Improved Surfaces			
					Width	Flange ht	Max. Overall Diameter	Max. Section Width	Tread Depth		25 km/h	10 km/h	5 km/h	Static
											(inches)	(inches)	(mm.)	(mm.)
18.00-25	IND 4	Industrial and Port	40	TL	13	2.5	1700	520	67.0	1000	21250	22950	24650	30600

DEFINITION OF TERMS FOR OFF-THE-ROAD TYRES

SERVICE CONDITIONS

- 1. Earthmover (haulage) -** A haulage cycle where equipment self-loads or receives a load from loading equipment then transports this load to another location and returns unloaded. Transportation usually occurs over unimproved surfaces at speeds up to 65 km/h (40mph) and short distances up to 4 km(2.5 miles) one way. Equipment in this category is mainly haulage trucks and scrapers.
- 2. Loader -** A work cycle where the equipment is used to pick up material and relocate it a short distance away. Tyre loads fluctuate depending on the conditions involved when the equipment picks up the load. Transportation speeds are low up to 10 km/h (5mph) and distances are short, a maximum of 76 m (250 feet) one way.
- 3. Load and Carry -** A work cycle where equipment intended for loader service picks up a load and transports this load to another location and returns unloaded. Transportation usually occurs over unimproved surfaces at low speeds up to 25 km/h (15mph) and rather short distances up to 600 m (2000 feet). Equipment in this category consists mainly of loaders log stackers and material handling equipment.
- 4. Dozer -** A working condition where equipment is used to move materials (usually earth) by pushing, dragging or grading. Tyre loads are relatively constant and speeds are low up to 10 km/h (5 mph). Travel distances vary depending on work situations.
- 5. Grader -** A working condition where equipment is used in construction and road maintenance. Tyre loads are relatively constant during the work cycle. Equipment speeds are slow during working periods with maximum transportation speeds reaching 40 km/h (25 mph). Travel distances vary depending on work situations.
- 6. Creep -** Movement of equipment at very slow speed (not over 60 m (200 feet) in 30 minutes). During Creep motion, loads on the tyres are very high and consideration must be given to the type of surface over which the equipment is travelling.
- 7. Drive Away -** This is a term used to define movement of a vehicle from one location to another under non-working conditions. This movement occurs during transportation of equipment from site to site. LOAD/SPEED/DISTANCE TABLES, are not applicable for drive away condition.
- 8. Smooth Floors and Runways -** These are defined as paved or protected operating surfaces which are free of undulations, obstructions or discontinuities.
- 9. Maximum Speed -** the peak speed attained by the vehicle during any part of a cycle (loaded or unloaded).
- 10. Industrial Vehicle -** Consists of usage on vehicles such as counterbalanced lift trucks, container handlers, straddle carrier aircraft tow tractors, mobile log stackers and rough terrain fork lifts.

OPERATING TKPH

Operating TKPH is computed to compare actual use with the tyre's TKPH rating. The operating TKPH is calculated in the following manner by observation and measurement of actual operation.

Operating TKPH = Average tyre load in metric tons x Average speed in kilometer per hour

Average Tyre Load = $\frac{1}{2}$ (Load on tyre when vehicle is empty) + (Load on tyre when vehicle is loaded)


Average speed = (Round trip distance in KM) x (No. Of trips) / Total hours from start of the first shift to end of last shift

OFF-THE-ROAD TYRE CODE NOMENCLATURE AND TYPE OF SERVICE

Code Number	Tread Type	Type Of service	Maximum	
			Speed (KMPH)	Distance (one Way)
C-Compactor				
C.1	Smooth	Compactor	8	Distance (one Way)
C.2	Grooved	Compactor	8	Unlimited
E-Eartmoving				
E.1	Rib Regular	Haulage	64	4 Km
E.2	Traction Regular	Haulage	64	4 Km
E.3	Rock Regular	Haulage	64	4 Km
E.4	Rock Deep Tread	Haulage	64	4 Km
E.7	Floatation	Haulage	64	4 Km
G-Grader				
G.1	Rib Regular	Grader	40	Unlimited
G.2	Traction Regular	Grader	40	Unlimited
G.3	Rock Regular	Grader	40	Unlimited
G.4	Rock Deep Tread	Grader	40	Unlimited
L-Loader and Dozer				
L.2	Traction Regular	Loader, Dozer	8	76 Mtr.
L.3	Rock Regular	Loader, Dozer	8	76 Mtr.
L.4	Rock Deep Tread	Loader, Dozer	8	76 Mtr.
L.5	Rock Extra Deep Tread	Loader, Dozer	8	76 Mtr.
L.3S	Smooth Regular	Loader, Dozer	8	76 Mtr.
L.4S	Smooth Deep Tread	Loader, Dozer	8	76 Mtr.
L.5S	Smooth Extra Deep Tread	Loader, Dozer	8	76 Mtr.

*for load and carry service or other conditions consult tyre manufacturer.

GENERAL INFORMATION

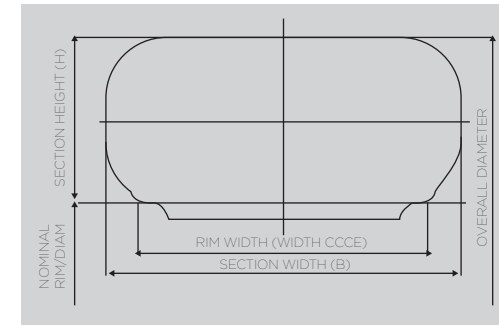

TYRE DESCRIPTOR AND SIDEWALL MARKINGS

- Travel direction in case of directional tread design:
- Safety warning
- Tubeless - tyres without tube.
- Drive wheels
- Free rolling wheels

LOAD INDEX AND SPEED SYMBOL: According to ETRTO (The European Tyre and Rim Technical Organisation), as well as to ECE (Economic Commission for Europe - UN Institution Geneva), the maximum load capacity, as well as the maximum speed are indicated by Load Index and Speed Symbol.

Load Index	Load Kg.	Load Index	Load Kg.	Load Index	Load Kg.	Load Index	Load Kg.	Speed Symbol	Speed Km/h
102	850	129	1850	156	4000	183	8750	A1	5
103	875	130	1900	157	4125	184	9000	A2	10
104	900	131	1950	158	4250	185	9250	A3	15
105	925	132	2000	159	4375	186	9500	A4	20
106	950	133	2060	160	4500	187	9750	A5	25
107	975	134	2120	161	4625	188	10000	A6	30
108	1000	135	2180	162	4750	189	10300	A7	35
109	1030	136	2240	163	4875	190	10600	A8	40
110	1060	137	2300	164	5000	191	10900	B	50
111	1090	138	2360	165	5150	192	11200	C	60
112	1120	139	2430	166	5300	193	11500	D	65
113	1150	140	2500	167	5450	194	11800	E	70
114	1180	141	2575	168	5600	195	12150	F	80
115	1215	142	2650	169	5800	196	12500	G	90
116	1250	143	2725	170	6000	197	12850	J	100
117	1285	144	2800	171	6150	198	13200	K	110
118	1320	145	2900	172	6300	199	13600	L	120
119	1360	146	3000	173	6500	200	14000	M	130
120	1400	147	3075	174	6700	201	14500	N	140
121	1450	148	3150	175	6900	202	15000	P	150
122	1500	149	3250	176	7100	203	15500	Q	160
123	1550	150	3350	177	7300	204	16000	R	170
124	1600	151	3450	178	7500	205	16500	S	180
125	1650	152	3550	179	7750	206	17000		
126	1700	153	3650	180	8000	207	17500		
127	1750	154	3750	181	8250	208	18000		
128	1800	155	3875	182	8500	209	18500		

The LOAD INDEX is a numerical code associated with the maximum load a tyre can carry at the speed indicated by its Speed Symbol under service conditions specified by the manufacturer.


The SPEED SYMBOL indicates the maximum speed at which the tyre can carry a load corresponding to its Load Index under service conditions specified by the manufacturer.

PRESSURE CONVERSION

Pressure Conversion			Pressure Conversion			Pressure Conversion			Pressure Conversion			Pressure Conversion			Pressure Conversion		
PSI	Kpa	Bar	PSI	Kpa	Bar	PSI	Kpa	Bar	PSI	Kpa	Bar	PSI	Kpa	Bar	PSI	Kpa	Bar
1	6.90	0.07	26	179.27	1.79	51	351.65	3.52	76	524.02	5.24	101	696.40	6.96	126	868.77	8.69
2	13.79	0.14	27	186.17	1.86	52	358.54	3.59	77	530.92	5.31	102	703.29	7.03	127	875.67	8.76
3	20.69	0.21	28	193.06	1.93	53	365.44	3.65	78	537.81	5.38	103	710.19	7.10	128	882.56	8.83
4	27.58	0.28	29	199.96	2.00	54	372.33	3.72	79	544.71	5.45	104	717.08	7.17	129	889.46	8.89
5	34.48	0.34	30	206.85	2.07	55	379.23	3.79	80	551.60	5.52	105	723.98	7.24	130	896.35	8.96
6	41.37	0.41	31	213.75	2.14	56	386.12	3.86	81	558.50	5.58	106	730.87	7.31	131	903.25	9.03
7	48.27	0.48	32	220.64	2.21	57	393.02	3.93	82	565.39	5.65	107	737.77	7.38	132	910.14	9.10
8	55.16	0.55	33	227.54	2.28	58	399.91	4.00	83	572.29	5.72	108	744.66	7.45	133	917.04	9.17
9	62.06	0.62	34	234.43	2.34	59	406.81	4.07	84	579.18	5.79	109	751.56	7.52	134	923.93	9.24
10	68.95	0.69	35	241.33	2.41	60	413.70	4.14	85	586.08	5.86	110	758.45	7.58	135	930.83	9.31
11	75.85	0.76	36	248.22	2.48	61	420.60	4.21	86	592.97	5.93	111	765.35	7.65	136	937.72	9.38
12	82.74	0.83	37	255.12	2.55	62	427.49	4.27	87	599.87	6.00	112	772.24	7.72	137	944.62	9.45
13	89.64	0.90	38	262.01	2.62	63	434.39	4.34	88	606.76	6.07	113	779.14	7.79	138	951.51	9.52
14	96.53	0.97	39	268.91	2.69	64	441.28	4.41	89	613.66	6.14	114	786.03	7.86	139	958.41	9.58
15	103.43	1.03	40	275.80	2.76	65	448.18	4.48	90	620.55	6.21	115	792.93	7.93	140	965.30	9.65
16	110.32	1.10	41	282.70	2.83	66	455.07	4.55	91	627.45	6.27	116	799.82	8.00	141	972.20	9.72
17	117.22	1.17	42	289.59	2.90	67	461.97	4.62	92	634.34	6.34	117	806.72	8.07	142	979.09	9.79
18	124.11	1.24	43	296.49	2.96	68	468.86	4.69	93	641.24	6.41	118	813.61	8.14	143	985.99	9.86
19	131.01	1.31	44	303.38	3.03	69	475.76	4.76	94	648.13	6.48	119	820.51	8.21	144	992.88	9.93
20	137.90	1.38	45	310.28	3.10	70	482.65	4.83	95	655.03	6.55	120	827.40	8.27	145	999.78	10.00
21	144.80	1.45	46	317.17	3.17	71	489.55	4.90	96	661.92	6.62	121	834.30	8.34	146	1006.67	10.07
22	151.69	1.52	47	324.07	3.24	72	496.44	4.96	97	668.82	6.69	122	841.19	8.41	147	1013.57	10.14
23	158.59	1.59	48	330.96	3.31	73	503.34	5.03	98	675.71	6.76	123	848.09	8.48	148	1020.46	10.20
24	165.48	1.65	49	337.86	3.38	74	510.23	5.10	99	682.61	6.83	124	854.98	8.55	149	1027.36	10.27
25	172.38	1.72	50	344.75	3.45	75	517.13	5.17	100	689.50	6.90	125	861.88	8.62	150	1034.25	10.34

EARTHMOVING TYRES IN DRIVE-AWAY SERVICE Loads and Inflation Pressures

Tyre Size Designation	Tyre load limits (KGs) at various cold inflation pressure (kPa)															
	170	205	240	275	310	345	380	415	450	485	515	550	585	620	655	690
12.00-20	1220	1355	1480	1605	1715	1825	1935	2035	2130	2225	2315	2405	2495	2575	2660	2745
12.00-24, 25	1370	1525	1670	1805	1935	2060	2180	2285	2395	2505	2605	2705	2815	2905	2995	3085
13.00-24, 25	1590	1760	1935	2085	2230	2375	2515	2640	2770	2905	3015	3130	3245	3360	3450	3560
14.00-24, 25	1870	2080	2280	2460	2630	2815	2970	3110	3265	3405	3560	3700	3835	3950	4085	4195
16.00-24, 25	2440	2715	2970	3220	3450	3650	3880	4085	4265	4470	4630	4810	4990	5170	5355	5490
18.00-24, 25	3155	3515	3855	4150	4445	4720	4990	5265	5535	5760	5990	6215	6445	6670	6895	7125
18.00-33	3650	4085	4470	4810	5170	5490	5810	6125	6395	6670	6985	7215	7485	7760	7985	8260
21.00-24, 25	4060	4335	4945	5355	5715	6080	6445	6760	7125	7440	7715	8030	8305	8575	8895	9165
21.00-35	4810	5355	5855	6350	6805	7215	7670	8030	8440	8800	9165	9530	9845	10210	10525	10845
24.00-25	5265	5855	6395	6895	7395	7895	8350	8755	9165	9575	9980	10390	10755	11115	11480	11795
24.00-49	7395	8210	9030	9755	10435	11115	11750	12340	12930	13520	14065	14610	15155	15655	16150	16650
Wide base																
23.5-25	3450	4195	4855	5490	6035	6580	7080	7530	8030	8535	9035	9535	10035	10535	11035	11535
26.5-29	3835	4535	5170	5760	6305	6805	7305	7760	8260	8760	9260	9760	10260	10760	11260	11760
29.5-29	5580	6125	6760	7350	7850	8350	8850	9300	9755	10165	10570	10980	11390	11795	12160	12525

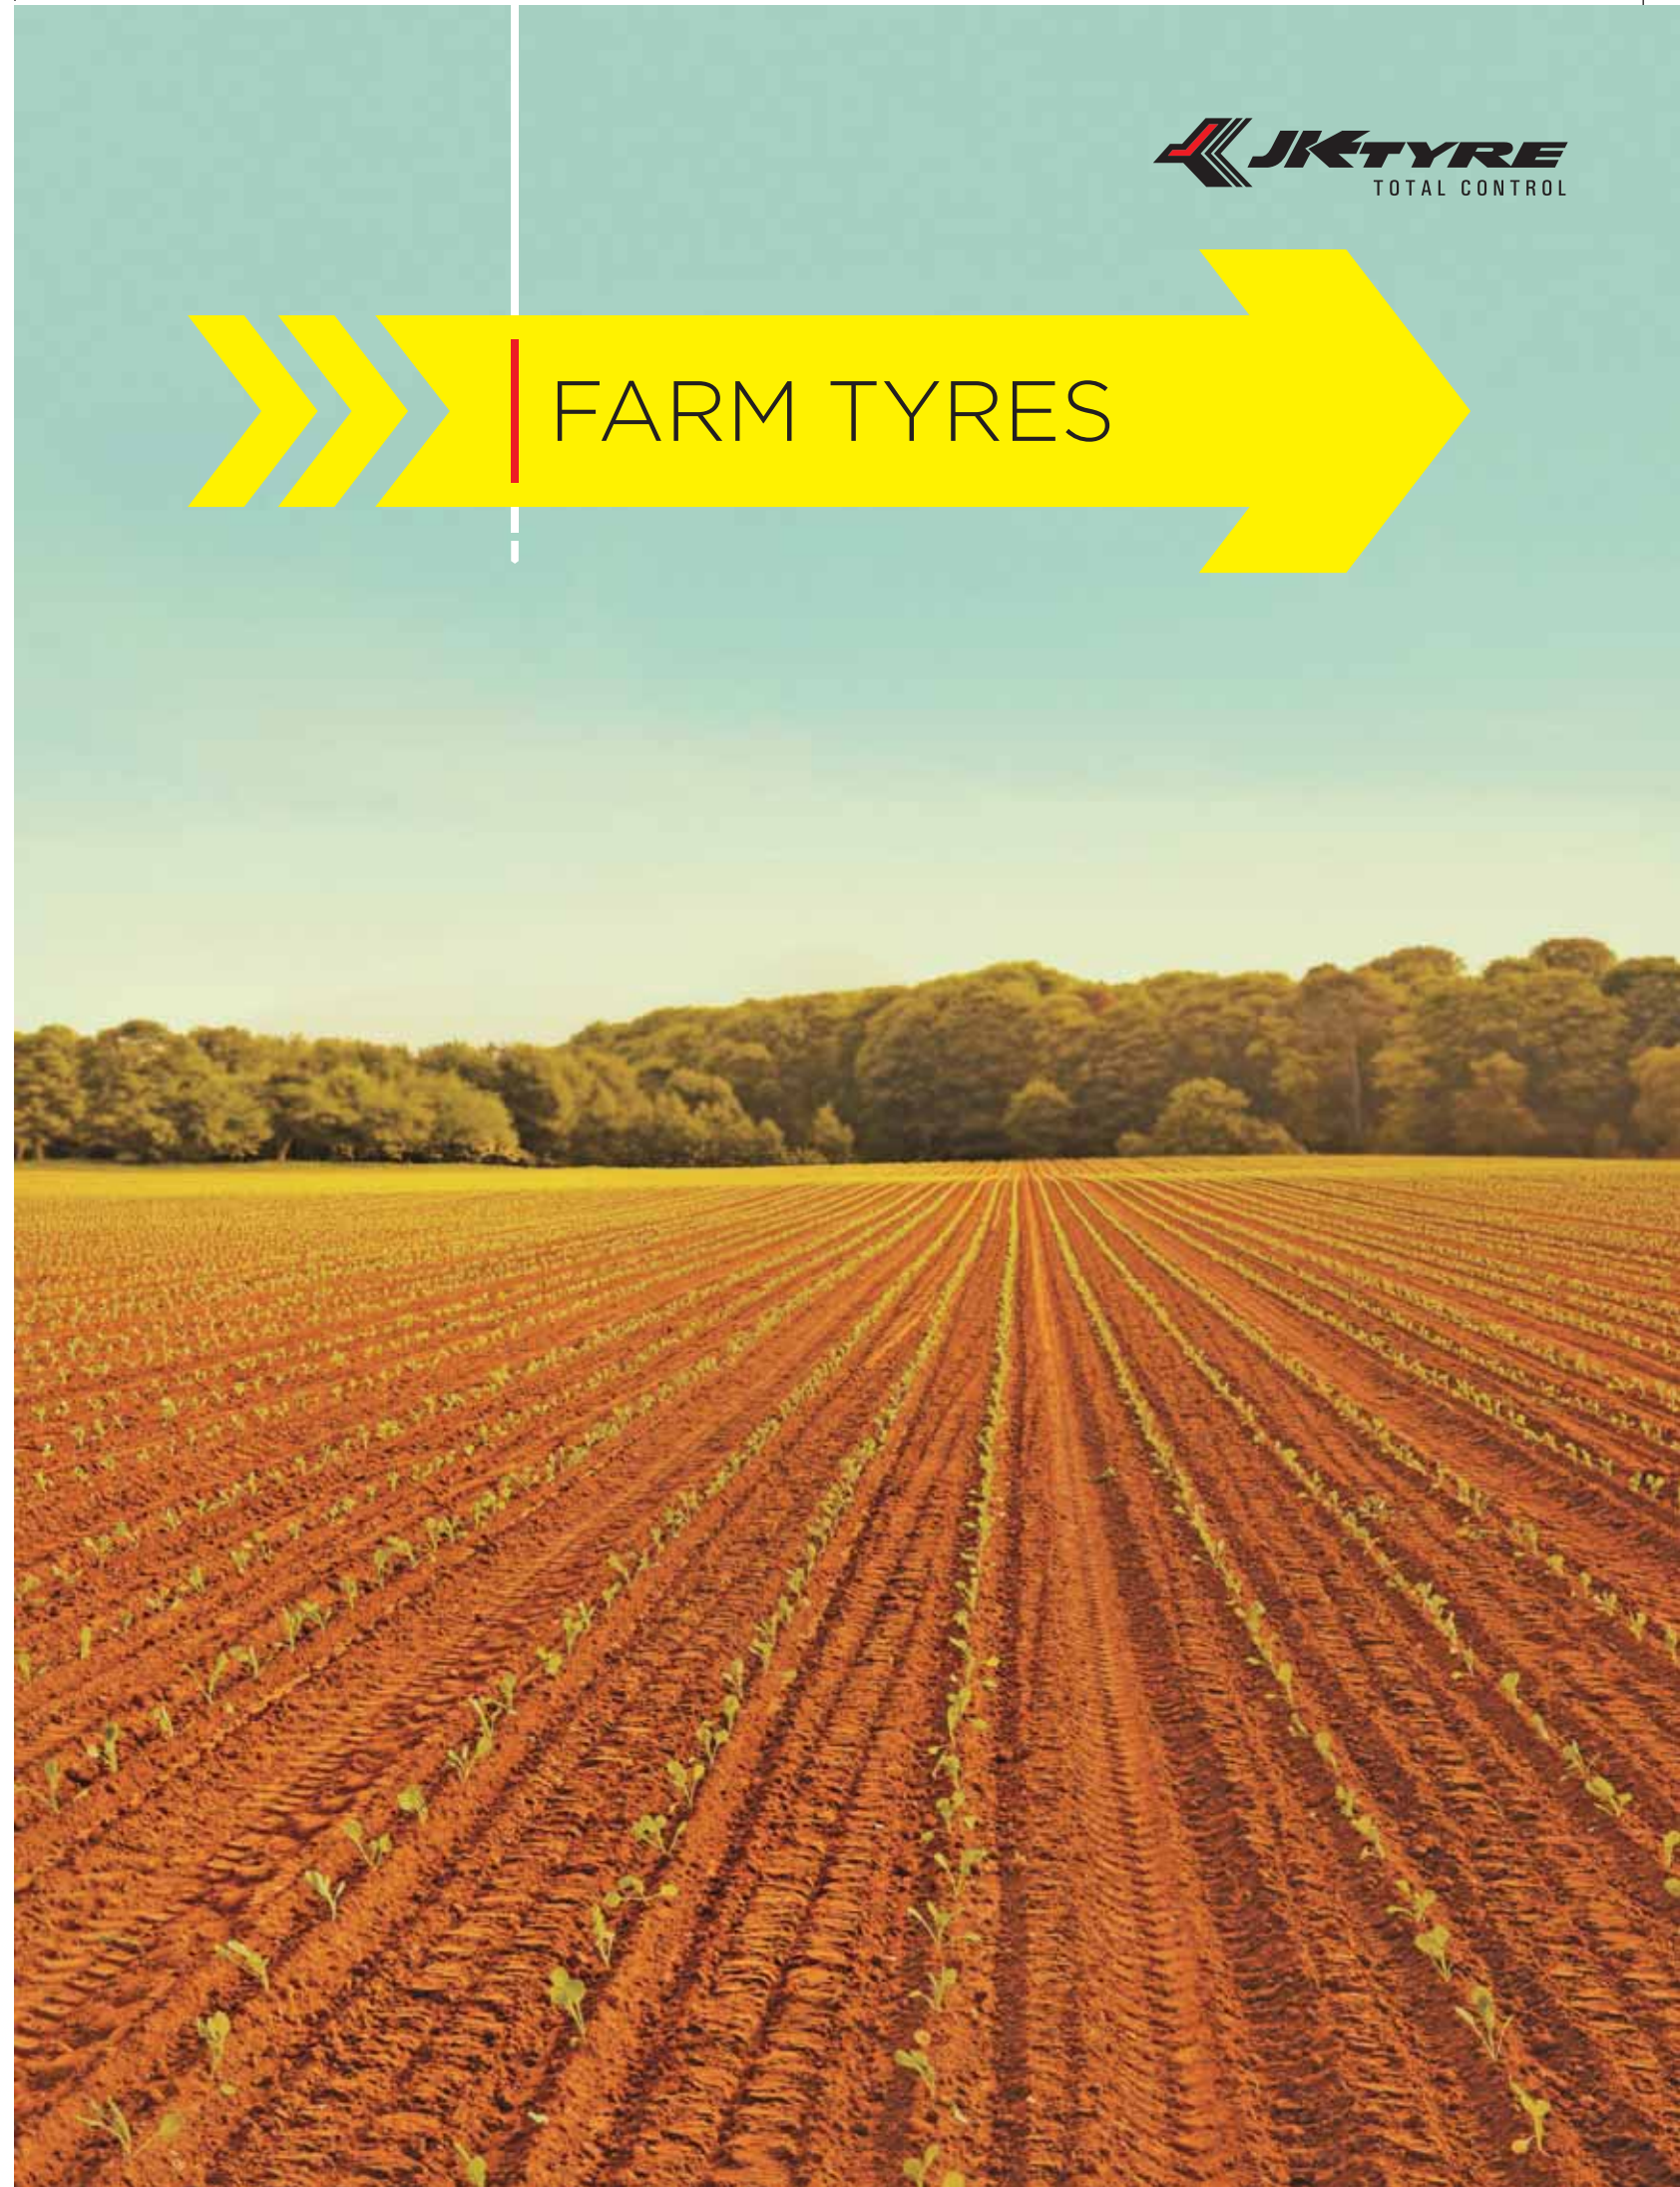



“Whatever be the conditions,
JK Tyre performs.”





SONA

Good For Plough Operation And Offers Excellent Stability

SALIENT FEATURES

- Unique MUD-SHAKER between lugs dislodges caked mud from the tyre surface and improves field performance
- 20 lugs (in 12.4/28 size) with overlapping centre provides better stability, fuel efficiency and road grip
- Special lug angle for excellent traction

BENEFITS

- Very good traction
- Enables better pull and thereby better ploughing even in hard soil
- Better wear properties and excellent stability

AVAILABLE SIZES:

11.2-28 (8PR), 12.4-28 (8PR), 12.4-28 (12PR), 13.6-28 (12PR), 16.9-28 (12PR), 18.4-30 (14PR)



SONA 2001

Longer Life In Both Field And Road Applications

SALIENT FEATURES

- Attractive, rugged design
- Unique Block Type Tie-Bars
- Mud-Shakers AND Bead Notch
- Reinforced shoulders
- Strong Construction
- Specially Designed Compound Technology

BENEFITS

- Useful for both field and road applications
- Provides excellent traction and draw bar pull
- Protection tyre from thorns and stubs
- Dislodges caked mud from tyre surface
- Longer life and better retreadability
- Facilitates easy mounting and demounting
- Provides higher mileage and traction

AVAILABLE SIZES:

12.4-28 (12PR), 13.6-28 (12PR)



SONA-1

For Long Life Even In Hard Soil

SALIENT FEATURES

- Optimum tread depth & broader lugs
- Optimized pattern developed using high-end computational simulations
- Optimal overlap at center to increase rubber contact
- Central tie bar between each lug with optimum support at lug base
- Unique "mud shaker" in between lugs & strong Nylon casing

BENEFITS

- Very good traction & increased tyre life
- Enables better pull and thereby better ploughing even in hard soil
- Better wear properties and excellent stability with improved fuel efficiency
- Increased stability & reduced tread squirm
- Excellent removal of mud, high load carrying capacity and better retreadability

AVAILABLE SIZES:

12.4-28 (12PR), 13.6-28 (12PR), 14.9-28 (12PR), 16.9-28 (12PR), 8.0-18 (4PR), 9.5-24 (8PR)



SONA-H/F

Suitable For Farming And Haulage And Offers Longer Life

SALIENT FEATURES

- 20 Lugs with overlapping center
- Optimised Land: Sea Ratio
- Deep tread depth
- Specially designed lug geometry
- Computer aided design
- Bead notch

BENEFITS

- Provides better stability, fuel efficiency, and road grip. Suitable for dual application for farming and haulage on road.
- Uniform wear and longer life
- Suit for high traction requirements
- Reduced carcass stress for high retreadability and high load carrying capacity
- Ease of fitment

AVAILABLE SIZES:

12.4-28 (12PR), 13.4-28 (12PR), 14.9-28 (12PR), 16.9-28 (12PR)



SONA

High Mileage 3 Rib Pattern

SALIENT FEATURES

- Special 3 rib tread design which performs very well in muddy and loosely cultivated soil & gives improved floatation and easysteering

BENEFITS

- Wider ribs provide more mileage during road haulage.
- Slotted shoulder ribs give excellent traction
- Wide tread ensures resistance to side slippage on unlevelled field conditions. Strong casing. Better retreadability.

AVAILABLE SIZES:

5.50-16 (8PR), 6.00-16 (8PR), 7.5-16 (8PR), 6.50-20 (8PR)



SONA-H/F

Suitable For Haulage And Agricultural Use, Offers Longer Life

SALIENT FEATURES

- Computer aided special 4 rib tread design
- Wider tread pattern and higher land: sea ratio
- Extra rubber for extra mileage
- Extra reinforced casing
- Slotted Shoulder ribs

BENEFITS

- For excellent performance both in haul- age and agricultural use.
- Gives better stability, better grip and high fuel efficiency.
- Provides more life during haulage ap- plication
- Extra rubber in tread region that gives extra initial mileage.
- For high load carrying capacity and bet- ter retreadability .
- Gives excellent traction .

AVAILABLE SIZES:

6.00-16 (8PR)



SONA-13R

Continuous 3 Rib Design For Better Steering

SALIENT FEATURES

- Continuous 3-Rib design
- Prominent center rib with superior compound
- Unique window design (Specially designed tread "Protectors")
- Strong Nylon casing

BENEFITS

- Good Steering control
- Longer tyre life.
- Better look. Resists external damages and enhance tyre life
- High casing reliability

AVAILABLE SIZES:

6.00-16 (8PR)



AGRIGOLD

Steel Belted Radial For All Applications

SALIENT FEATURES

- Two Layer Steel Belt construction design
- Wider Footprint
- Optimum Tread depth and broader lugs with adequate overlap at Centre
- Optimized pattern and unique mud-shaker, developed using high end computational simulations
- Central tie bar between each lug with optimum support at lug base
- Extra strong casing

BENEFITS

- Excellent puncture protection, better stability and reduced tread squirm
- Smooth ride with less slippage
- Excellent traction and increased tyre life with better fuel efficiency
- Better pull and better ploughing even in hard soil
- Excellent self cleaning property
- Reduced downtime and enhanced productivity

AVAILABLE SIZES:

320/85 R 28 (A6), 340/85 R 28 (A6), 380/85 R 28 (A6), 420/85 R 28 (A6)

SONA

SPECIFICATIONS

Size	TYRE TYPE	PR	Rec Rim Width(Code)	Overall Diameter(mm)	Section Width(mm)	Non Skid Depth(mm)	Max Load/ Inflation Kg @ Kpa	Load Index
11.2-28	TT	8	W 10	1235	303	28.5	1320 @ 240	118
12.4-28	TT	8	W 11	1310	343	36.8	1550 @ 230	123
12.4-28	TT	12	W 11	1310	343	36.8	1650 @ 250	125
13.6-28	TT	12	W 12	1347	373	36.5	1800 @ 230	128
16.9-28	TT	12	W 13	1450	428	40.5	2725 @ 240	143
18.4-30	TT	14	W 15	1585	483	37.5	3450 @ 260	151

SONA-1

SPECIFICATIONS

Size	TYRE TYPE	PR	Rec Rim Width(Code)	Overall Diameter(mm)	Section Width(mm)	Non Skid Depth(mm)	Max Load/ Inflation Kg @ Kpa	Load Index
12.4-28	TT	12	W 11	1300	340	37.0	1650 @ 250	125
13.6-28	TT	12	W 12	1340	368	40.0	1800 @ 230	128
14.9-28	TT	12	W13	1390	391	39.0	2120 @ 230	134
16.9-28	TT	12	W15L	1455	446	40.0	2725 @ 240	143
8-18	TT	4	W7	850	217	28.0	515 @ 160	85
9.5-24	TT	8	W8	1060	247	32.0	1120 @ 280	112

SONA 2001

SPECIFICATIONS

Size	TYRE TYPE	PR	Rec Rim Width(Code)	Overall Diameter(mm)	Section Width(mm)	Non Skid Depth(mm)	Max Load/ Inflation Kg @ Kpa	Load Index
12.4-28	TT	12	W 11	1290	351	37.0	1650 @ 250	125
13.6-28	TT	12	W 12	1350	358	37.0	1800 @ 230	128

SONA-H/F

SPECIFICATIONS

Size	TYRE TYPE	PR	Rec Rim Width(Code)	Overall Diameter(mm)	Section Width(mm)	Non Skid Depth(mm)	Max Load/ Inflation Kg @ Kpa	Load Index
12.4-28	TT	12	W 11	1300	334	34.5	1650 @ 250	125
13.6-28	TT	12	W 12	1359	374	37.5	1800 @ 230	128
14.9-28	TT	12	W 13	1390	393	38.0	2120 @ 230	134
16.9-28	TT	12	W 15	1445	448	39.0	2725 @ 240	143

SONA

SPECIFICATIONS

Size	TYRE TYPE	PR	Rec Rim Width(Code)	Overall Diameter(mm)	Section Width(mm)	Non Skid Depth(mm)	Max Load/ Inflation Kg @ Kpa	Load Index
5.50-16	TT	8	4.5" E	728	167	16.0	600 @ 450	90
6.00-16	TT	8	4.5" E	750	179	18.0	675 @ 450	94
7.50-16	TT	8	5.5" F	820	217	20.0	870 @ 370	103
6.50-20	TT	8	5.0" F	883	191	18.6	850 @ 450	102

SONA -1 3R

SPECIFICATIONS

Size	TYRE TYPE	PR	Rec Rim Width(Code)	Overall Diameter(mm)	Section Width(mm)	Non Skid Depth(mm)	Max Load/ Inflation Kg @ Kpa	Load Index
6.00-16	TT	8	4.5" E	750	177	18.0	675 @ 450	94

SONA-H/F

SPECIFICATIONS

Size	TYRE TYPE	PR	Rec Rim Width(Code)	Overall Diameter(mm)	Section Width(mm)	Non Skid Depth(mm)	Max Load/ Inflation Kg @ Kpa	Load Index
6.00-16	TT	8	4.5" E	752	183	18.0	675 @ 450	94

RADIAL

AGRIGOLD

SPECIFICATIONS

Size	TYRE TYPE	PR	Rec Rim Width(Code)	Overall Diameter(mm)	Section Width(mm)	Non Skid Depth(mm)	Max Load/ Inflation Kg @ Kpa	Load Index
320/85 R 28	TL	A6	W11	1272	347	38.5	1600 @ 160	124
340/85 R 28	TL	A6	W12	1310	373	40.0	1750 @ 160	127
380/85 R 28	TL	A6	W13	1370	398	38.0	2060 @ 160	133
420/85 R 28	TL	A6	W15L	1450	448	38.0	2430 @ 160	139



NOTES

A series of horizontal dashed lines for writing notes, spanning the width of the page.



NOTES

A series of horizontal dashed lines for writing notes, spanning the width of the page.