

AGRICULTURAL TIRES TECHNICAL DATA BOOK INDEX



BKT AGRICULTURAL RANGE

2 - 7

TRACTOR

AGRIMAX FORCE	19 - 20
AGRIMAX FORTIS	21
AGRIMAX SIRIO	22
AGRIMAX RT 657	23 - 27
AGRIMAX RT 765	28 - 34
AGRIMAX RT 855	35 - 43
AGRIMAX SPARGO	44
AGRIMAX RT 945	45 - 46
AGRIMAX RT 955	47 - 50
AGRIMAX ELOS	51 - 52
RT 853	53
RT 857	54 - 55
RIDEMAX IT 696	56 - 57
TR 126	58
TR 133	58
TR 135	59 - 70
TR 136	71
TR 144	72
TR 171	73 - 76
FARM 2000	77 - 78
AS 2001	79
TRAC FARM	80
TR 270	81 - 82
TR 273	83
TR 459	84 - 85
TR 461	86
TRAC SUPER	87
AT 316	87

HARVESTER

AGRIMAX TERIS	88 - 90
AGRIMAX RT 600	91
STAR TRAC	92
TR 137	93
TR 360	94
TR 882	94 - 95
FLOTATION 558	96

PIVOT IRRIGATOR

TR 117	97
--------	----

FLOTATION

RIDEMAX FL 690	98
RIDEMAX FL 693 M	99 - 102
FL 630	103
FL 630 PLUS	104
FL 630 SUPER	105 - 106
FL 630 ULTRA	107
FL 635	108
FL 639	109
FLOTATION 351	110
FL 353	110
FLOTATION 558	111
FLOTATION 648	112 - 124
FLOTATION 648 T	125
FLOTATION TR 675	126
FLOTATION RIB 774	127

AGRICULTURAL TIRES TECHNICAL DATA BOOK

INDEX

FORESTRY

FORESTECH	128
FS 216	129 - 131
TR 678	132

MULTIUSE

MULTIMAX MP 513	133
MULTIMAX MP 522	134
MULTIMAX MP 540	135
RT 747 AGRO INDUSTRIAL	136
AT 603	137
AT 621	138 - 139
MP 567	140 - 142
MP 570	143
MP 585	144
MP 590	144
MP 600	145
AS 504	146 - 153

FRONT

TF 8181	154 - 156
TF 9090	157 - 159
POWER RIB F2	160
PRO RIB F2M	160
RIB F3	161
STEER FARM	161

IMPLEMENT

AW 711	162
AW 702	163 - 167
AW 705	168 - 169
AW 708	170
AW 909	171 - 172
AW 09	173
RIB IMPLEMENT	174
RIB 713	174
RIB 774 (A)	175
RIB 774 (B)	176
RIB 774 (C)	177
RIB 775	178
RIB 900	178
RIB MASTER	179
FLOTATION RIB IMPLEMENT	179
MULTI RIB	180
AS 504	180 - 189
AS 505	190
AS 507	190
TR 882	191 - 192
SL441	192

LAWN & GARDEN

TR 360	193
LG SMOOTH	193
LG 306	194 - 198
LG 307	199
LG 408	200
LG RIB	201
TRAC MASTER	202
TR 313	202
TR 315	203
TR 317	204
TR 319	204



GOLF

GF 304	205
GF 305 CLASSIC	205

TRAILER

GF 305 FARM TRAILER	206
INDUSTRIAL RIB F3	206
I-1	207 - 210
FARM HIGHWAY SPECIAL	211
BK 823	212
SL 441	212
ST 180	213
TR 387	214 - 215
TR 390	216
TR 391	217

TRANSPORT

MH TR 182	218
LT TR 182	219
ST 195	219

ATV

W 207	220 - 222
AT 112	222
AT 108	223 - 224
AT 109	225
AT 110	226
AT 111	226 - 228
AT 111 HD	228 - 229
AT 119	229

GO KART

SM 48	230
SM 54	230
SM 68	231

TIRE CARE & SAFETY

READING YOUR TIRE	232 - 233
LOAD INDEX / SPEED SYMBOL	234 - 235
CONVERSION TABLE	236 - 239
MOUNTING & DISMOUNTING	240 - 241
TIRE LIFE & FAILURE	242
HANDLING & STORAGE	242 - 243



TRACTOR						
	AGRIMAX FORCE	AGRIMAX FORTIS	AGRIMAX SIRIO	AGRIMAX RT 657	AGRIMAX RT 765	
	TRACTOR					
		AGRIMAX RT 855	AGRIMAX SPARGO	AGRIMAX RT 945	AGRIMAX RT 955	AGRIMAX ELOS
		TRACTOR				
RT 853			RT 857	RIDEMAX IT 696	TR 126	TR 133
TRACTOR						
	TR 135		TR 136	TR 144	TR 171	FARM 2000
	TRACTOR					
		AS 2001	TRAC FARM	TR 270	TR 273	TR 459

B = Bias R = Radial



TRACTOR	 B	 R	 B	HARVESTER	 R	 R
	TR 461	TRAC SUPER	AT 316		AGRIMAX TERIS	AGRIMAX RT 600
HARVESTER	 B	 B	 B	 B	 B	
	STAR TRAC	TR 137	TR 360	TR 882	FLOTATION 558	
	PIVOT IRRIGATOR	 B				
		TR 117				
FLOTATION	 R		 R			
	RIDEMAX FL 690		RIDEMAX FL 693 M			
FLOTATION	 R	 R	 R	 R	 R	
	FL 630	FL 630 PLUS	FL 630 SUPER	FL 630 ULTRA	FL 635	
	FLOTATION	 R	 B	 B	 B	 B
		FL 639	FLOTATION 351	FL 353	FLOTATION 558	FLOTATION 648

B = Bias R = Radial



FLOTATION						FORESTRY		
	FLOTATION 648 T	FLOTATION TR 675	FLOTATION RIB 774				FORESTECH	
FORESTRY					MULTIUSE			
	FS 216	TR 678				MULTIMAX MP 513	MULTIMAX MP 522	
MULTIUSE								
	MULTIMAX MP 540	RT 747 AGRO INDUSTRIAL	AT 603	AT 621	MP 567			
	MULTIUSE							
		MP 570	MP 585	MP 590	MP 600	AS 504		
FRONT								
		TF 8181	TF 9090	POWER RIB F2	PRO RIB F2M	RIB F3		

B = Bias R = Radial



FRONT	 B	IMPLEMENT						
	STEER FARM	 R	 B	 B	 B			
		AW 711	AW 702	AW 705	AW 708			
	IMPLEMENT	 B	 B	 B	 R	 B		
		AW 909	AW 09	RIB IMPLEMENT	RIB 713	RIB 774 (A)		
IMPLEMENT		 B	 B	 B	 B	 B		
		RIB 774 (B)	RIB 774 (C)	RIB 775	RIB 900	RIB MASTER		
		IMPLEMENT	 B	 B	 B	 B	 B	
	FLOTATION RIB IMPLEMENT		MULTI RIB	AS 504	AS 505	AS 507		
	IMPLEMENT		 B	 B	LAWN & GARDEN		 B	 B
TR 882			SL 441	TR 360	LG SMOOTH	LG 306		

B = Bias R = Radial



LAWN & GARDEN										
	LG 307	LG 408	LG RIB	TRAC MASTER	TR 313					
	LAWN & GARDEN				GOLF					
						TR 315	TR 317	TR 319	GF 304	GF 305 CLASSIC
						TRAILER				
GF 305 FARM TRAILER	INDUSTRIAL RIB F3	I-1	FARM HIGHWAY SPECIAL	BK 823						
TRAILER										
	SL 441	ST 180	TR 387	TR 390	TR 391					
	TRANSPORT									
		MH TR 182	LT TR 182	ST 195						

B = Bias R = Radial



B = Bias R = Radial



AGRICULTURAL RADIAL TIRES



RIM DIAMETER (inches)	TIRE SIZE	PATTERN	PAGE	PATTERN	PAGE	PATTERN	PAGE
16	180/95 R 16	AGRIMAX RT 855	35				
	200/70 R 16	AGRIMAX RT 765	28				
	210/95 R 16	AGRIMAX RT 855	35				
	220/70 R 16	AGRIMAX RT 765	28				
	240/70 R 16	AGRIMAX RT 765	28				
	260/70 R 16	AGRIMAX RT 765	28				
	280/70 R 16	AGRIMAX RT 765	28				
	320/65 R 16	AGRIMAX RT 657	23				
16.5	340/60 R 16.5	AW 711	162				
	380/55 R 16.5	AW 711	162				
17	425/55 R 17	MULTIMAX MP 513	133				
	440/50 R 17	TRAC SUPER	87				
	500/50 R 17	RIDEMAX FL 693 M	99				
18	210/95 R 18	AGRIMAX RT 855	35				
	280/70 R 18	AGRIMAX RT 765	28				
	280/80 R 18	MULTIMAX MP 522	134				
	320/65 R 18	AGRIMAX RT 657	23				
	340/65 R 18	AGRIMAX RT 657	23				
	400/60 R 18	AW 711	162				
	440/55 R 18	AW 711	162				
19.5	15 R 19.5	AW 711	162				
20	210/90 R 20	AGRIMAX RT 855	35				
	210/95 R 20	AGRIMAX RT 855	35				
	250/85 R 20	AGRIMAX RT 855	35				
	260/70 R 20	AGRIMAX RT 765	29				
	280/70 R 20	AGRIMAX RT 765	29				
	280/85 R 20	AGRIMAX RT 855	36				
	300/70 R 20	AGRIMAX RT 765	29				
	320/70 R 20	AGRIMAX RT 765	29				
	320/85 R 20	AGRIMAX RT 855	36				
	335/80 R 20	MULTIMAX MP 540	135				
	340/65 R 20	AGRIMAX RT 657	23				
	360/70 R 20	AGRIMAX RT 765	29				
	380/70 R 20	AGRIMAX RT 765	29				
	380/75 R 20	MULTIMAX MP 522	134				
	400/70 R 20	MULTIMAX MP 522	134				
	405/70 R 20	MULTIMAX MP 513	133				
	420/65 R 20	AGRIMAX RT 657	23				
425/75 R 20	MULTIMAX MP 513	133					
440/65 R 20	AGRIMAX RT 657	24					
22.5	500/45 R 22.5	RIDEMAX FL 693 M	99				
	500/60 R 22.5	FL 630	103	FL 630 ULTRA	107	RIDEMAX FL 693 M	99
	560/45 R 22.5	FL 630 PLUS	104	FL 639	109	RIDEMAX FL 693 M	99
	560/55 R 22.5	RIDEMAX FL 693 M	100				
	560/60 R 22.5	FL 630 PLUS	104	FL 630 SUPER	105	RIDEMAX FL 693 M	100
	580/65 R 22.5	FL 630 SUPER	105	RIDEMAX FL 693 M	100		
	600/50 R 22.5	FL 630 PLUS	104	FL 639	109	RIDEMAX FL 693 M	101
	650/50 R 22.5	RIDEMAX FL 693 M	101				
	650/55 R 22.5	FL 635	108				
	710/40 R 22.5	FL 630 PLUS	104	FL 639	109		



RIM DIAMETER (inches)	TIRE SIZE	PATTERN	PAGE	PATTERN	PAGE	PATTERN	PAGE	PATTERN	PAGE		
24	210/90 R 24	AGRIMAX RT 955	47								
	250/85 R 24	AGRIMAX RT 855	36								
	280/85 R 24	AGRIMAX RT 855	36								
	300/80 R 24	RIDEMAX IT 696	56								
	320/70 R 24	AGRIMAX RT 765	30								
	320/85 R 24	AGRIMAX RT 855	36								
	340/80 R 24	RIDEMAX IT 696	56								
	340/85 R 24	AGRIMAX RT 855	36								
	360/70 R 24	AGRIMAX RT 765	30								
	380/70 R 24	AGRIMAX RT 765	30								
	380/85 R 24	AGRIMAX RT 855	37								
	400/80 R 24	RIDEMAX IT 696	56								
	420/65 R 24	AGRIMAX RT 657	24								
	420/70 R 24	AGRIMAX RT 765	30								
	420/85 R 24	AGRIMAX RT 855	37								
	440/65 R 24	AGRIMAX RT 657	24								
	460/70 R 24	MULTIMAX MP 522	134	RT 747 AGRO INDUSTRIAL	136						
	480/65 R 24	AGRIMAX RT 657	24								
	480/70 R 24	AGRIMAX RT 765	30								
	495/70 R 24	MULTIMAX MP 513	133								
500/70 R 24	MULTIMAX MP 522	134	RT 747 AGRO INDUSTRIAL	136							
540/65 R 24	AGRIMAX RT 657	24									
26	420/85 R 26	RT 857	54								
	460/85 R 26	RT 857	54								
	620/75 R 26	AGRIMAX TERIS	88								
	750/65 R 26	AGRIMAX TERIS	88								
	28L R 26	RIDEMAX FL 690	98								
26.5	600/55 R 26.5	FL 630	103	FL 630 SUPER	105	FL 630 ULTRA	107				
	650/55 R 26.5	FL 630	103	FL 630 SUPER	105	FL 630 ULTRA	107	RIDEMAX FL 693 M	101		
	650/65 R 26.5	FL 630 SUPER	106								
	710/50 R 26.5	FL 630	103	RIDEMAX FL 693 M	101						
	750/45 R 26.5	FL 630 SUPER	106								
	750/60 R 26.5	FL 630 SUPER	106								
	800/45 R 26.5	FL 630 PLUS	104								
28	210/95 R 28	AGRIMAX RT 955	47								
	250/85 R 28	AGRIMAX RT 855	37								
	280/85 R 28	AGRIMAX RT 855	37								
	320/85 R 28	AGRIMAX RT 855	37	RT 857	54						
	340/85 R 28	AGRIMAX RT 855	37	RT 857	54						
	360/70 R 28	AGRIMAX RT 765	30								
	380/70 R 28	AGRIMAX RT 765	31								
	380/85 R 28	AGRIMAX RT 855	38	RT 857	54						
	400/80 R 28	RIDEMAX IT 696	56								
	420/70 R 28	AGRIMAX RT 765	31								
	420/85 R 28	AGRIMAX ELOS	51	AGRIMAX RT 855	38	RT 857	55				
	440/65 R 28	AGRIMAX RT 657	25								
	440/80 R 28	RIDEMAX IT 696	56								
	480/65 R 28	AGRIMAX RT 657	25								
	480/70 R 28	AGRIMAX RT 765	31								

AGRICULTURAL RADIAL TIRES



RIM DIAMETER (inches)	TIRE SIZE	PATTERN	PAGE	PATTERN	PAGE						
28	540/65 R 28	AGRIMAX RT 657	25								
	600/65 R 28	AGRIMAX RT 657	25								
	IF 600/70 R 28	AGRIMAX FORCE	19								
30	380/85 R 30	AGRIMAX RT 855	38								
	420/70 R 30	AGRIMAX RT 765	31								
	420/85 R 30	AGRIMAX RT 855	38	RT 857	55						
	440/80 R 30	RIDEMAX IT 696	57								
	460/85 R 30	AGRIMAX RT 855	38	RT 857	55						
	480/70 R 30	AGRIMAX RT 765	31								
	480/80 R 30	RIDEMAX IT 696	57								
	540/65 R 30	AGRIMAX RT 657	26	AGRIMAX SIRIO	22						
	600/65 R 30	AGRIMAX RT 657	26								
	600/70 R 30	AGRIMAX FORTIS	20	AGRIMAX RT 765	26						
	IF 600/70 R 30	AGRIMAX FORCE	19	AGRIMAX SIRIO	22						
	620/75 R 30	AGRIMAX TERIS	88								
	IF 710/60 R 30	AGRIMAX FORCE	19								
	30.5	650/65 R 30.5	FL 630 SUPER	106							
710/50 R 30.5		RIDEMAX FL 693 M	102								
750/60 R 30.5		FL 630 SUPER	106	RIDEMAX FL 693 M	102						
850/50 R 30.5		RIDEMAX FL 693 M	102								
32	210/95 R 32	AGRIMAX RT 955	47								
	230/95 R 32	AGRIMAX RT 955	47								
	270/95 R 32	AGRIMAX RT 955	47								
	30.5L R 32	RIDEMAX FL 690	98								
	320/85 R 32	AGRIMAX RT 855	38								
	650/75 R 32	AGRIMAX TERIS	88								
	800/65 R 32	AGRIMAX RT 600	91	AGRIMAX TERIS	89						
	900/60 R 32	AGRIMAX TERIS	89								
	1050/50 R 32	AGRIMAX TERIS	89	AGRIMAX RT 600	91						
	34	320/85 R 34	AGRIMAX RT 855	39							
380/85 R 34		AGRIMAX RT 855	39								
420/85 R 34		AGRIMAX RT 855	39								
440/80 R 34		RIDEMAX IT 696	57								
460/85 R 34		AGRIMAX RT 855	39								
480/70 R 34		AGRIMAX RT 765	32								
480/80 R 34		RIDEMAX IT 696	57								
520/70 R 34		AGRIMAX RT 765	32								
540/65 R 34		AGRIMAX RT 657	27	AGRIMAX SIRIO	22						
IF 580/80 R 34 CFO		AGRIMAX TERIS	90								
600/65 R 34		AGRIMAX RT 657	27								
600/70 R 34		AGRIMAX FORTIS	21								
IF 600/70 R 34		AGRIMAX FORCE	19								
IF 650/65 R 34		AGRIMAX FORCE	19								
IF 710/60 R 34		AGRIMAX FORCE	19								
36		230/95 R 36	AGRIMAX RT 955	47							
	270/95 R 36	AGRIMAX RT 955	47								
	320/85 R 36	AGRIMAX RT 855	39								
	340/85 R 36	AGRIMAX RT 855	39								
38	270/95 R 38	AGRIMAX RT 955	48								
	320/85 R 38	AGRIMAX RT 855	40								
	340/85 R 38	AGRIMAX ELOS	51	AGRIMAX RT 855	40						
	380/85 R 38	AGRIMAX ELOS	51								



RIM DIAMETER (inches)	TIRE SIZE	PATTERN	PAGE	PATTERN	PAGE	PATTERN	PAGE				
38	380/85 R 38	AGRIMAX RT 855	40								
	VF 380/85 R 38	AGRIMAX SPARGO	44								
	420/85 R 38	AGRIMAX ELOS	51	AGRIMAX RT 855	40						
	460/85 R 38	AGRIMAX RT 855	40								
	480/70 R 38	AGRIMAX RT 765	32								
	480/80 R 38	AGRIMAX RT 855	40	RIDEMAX IT 696	57	RT 853	53				
	520/70 R 38	AGRIMAX RT 765	32								
	520/85 R 38	AGRIMAX RT 855	41	RT 853	53						
	540/65 R 38	AGRIMAX RT 657	27	AGRIMAX SIRIO	22						
	580/70 R 38	AGRIMAX RT 765	32								
	600/65 R 38	AGRIMAX RT 657	27								
	620/70 R 38	AGRIMAX RT 765	33								
	650/65 R 38	AGRIMAX RT 657	27								
	650/85 R 38	AGRIMAX FORTIS	21								
	710/70 R 38	AGRIMAX RT 765	33	AGRIMAX SIRIO	22						
	800/70 R 38	AGRIMAX FORTIS	21								
	IF 900/60 R 38	AGRIMAX FORCE	19								
42	230/95 R 42	AGRIMAX RT 955	48								
	300/85 R 42	AGRIMAX RT 955	48								
	320/90 R 42	AGRIMAX RT 945	45								
	480/80 R 42	AGRIMAX ELOS	52	AGRIMAX RT 855	41						
	520/85 R 42	AGRIMAX ELOS	52	AGRIMAX RT 855	41	AGRIMAX TERIS	90				
	620/70 R 42	AGRIMAX RT 765	33								
	650/65 R 42	AGRIMAX RT 657	27								
	IF 650/85 R 42	AGRIMAX FORCE	19								
	710/70 R 42	AGRIMAX RT 765	34								
	710/75 R 42	AGRIMAX FORTIS	21								
	IF 710/70 R 42	AGRIMAX FORCE	20								
	IF 710/75 R 42	AGRIMAX FORCE	20								
	IF 900/60 R 42	AGRIMAX FORCE	20								
	44	210/95 R 44	AGRIMAX RT 955	48							
230/95 R 44		AGRIMAX RT 955	48								
270/95 R 44		AGRIMAX RT 955	48								
46	270/95 R 46	AGRIMAX RT 955	49								
	300/95 R 46	AGRIMAX RT 955	49								
	320/90 R 46	AGRIMAX RT 945	45								
	340/85 R 46	AGRIMAX RT 955	49								
	380/90 R 46	AGRIMAX RT 945	45								
	VF 380/90 R 46	AGRIMAX SPARGO	44								
	420/80 R 46	AGRIMAX RT 855	42								
	480/80 R 46	AGRIMAX RT 855	42								
	520/85 R 46	AGRIMAX RT 855	42								
620/70 R 46	AGRIMAX RT 765	34									
48	230/95 R 48	AGRIMAX RT 955	49								
	270/95 R 48	AGRIMAX RT 955	50								
	340/85 R 48	AGRIMAX RT 955	50								
50	320/90 R 50	AGRIMAX RT 945	45								
	380/90 R 50	AGRIMAX RT 945	45								
	480/80 R 50	AGRIMAX RT 855	43								
52	300/95 R 52	AGRIMAX RT 955	50								
54	270/95 R 54	AGRIMAX RT 955	50								
	320/90 R 54	AGRIMAX RT 945	46								
	380/90 R 54	AGRIMAX RT 945	46								



AGRICULTURAL BIAS TIRES



RIM DIAMETER (inches)	TIRE SIZE	PATTERN	PAGE	PATTERN	PAGE	PATTERN	PAGE	PATTERN	PAGE	PATTERN	PAGE
5	10 X 4.5 - 5	SM 48 (GK)	230	SM 54 (GK)	230	SM 68 (GK)	231				
	11 X 4.00 - 5	LG 306	194								
	11 X 6.00 - 5	SM 68 (GK)	231								
	11 X 7.10 - 5	SM 48 (GK)	230	SM 54 (GK)	230	SM 68 (GK)	231				
6	13 X 5.00 - 6	LG 306	194	LG RIB	201						
	15 X 6.00 - 6	LG 306	194	LG RIB	201						
	AT 145 X 70 - 6	AT 109	225								
7	AT 16 X 8 - 7	AT 109	225								
8	4.80 - 8	ST 180	213								
	5.70 - 8	ST 180	213								
	16 X 6.50 - 8	LG 306	194	LG RIB	201	TR 315	203				
	18 X 7 - 8	TR 360	94 / 193								
	18 X 8.50 - 8	GF 304	205	LG 306	194 / 195	TR 317	204				
	18 X 9.50 - 8	LG 306	194								
	20 X 10.00 - 8	LG 306	195	LG 307	199						
	AT 18 X 10 - 8	AT 111	226								
	AT 18 X 9.5 - 8	AT 109	225								
	AT 20 X 10 - 8	AT 112	222								
	AT 20 X 11 - 8	AT 111	226								
	AT 20 X 7 - 8	AT 108	223	AT 109	225	AT 110	226				
	AT 21 X 9 - 8	AT 109	225								
AT 22 X 11 - 8	AT 108	223	AT 109	225	AT 111	226	AT 119	229	W 207	220	
9	6.00 - 9	ST 180	213	ST 195	219						
	AT 18 X 10 - 9	AT 111	227								
	AT 20 X 11 - 9	AT 111	227								
	AT 21 X 8 - 9	AT 110	226								
	AT 22 X 10 - 9	AT 108	223								
	AT 22 X 11 - 9	AT 108	223	AT 111	227	W 207	220				
	AT 25 X 12 - 9	AT 108	223	W 207	220						
	AT 25 X 13 - 9	AT 108	223	W 207	220						
10	5.00 - 10	ST 180	213								
	205/50 - 10	GF 305 CLASSIC	205								
	205/65 - 10	GF 305 FARM TRAILER	206								
	18 X 10.50 - 10	LG SMOOTH	193								
	18 X 8.50 - 10	LG 306	195								
	20 X 10.00 - 10	LG 306	195	LG RIB	201	LG SMOOTH	193				
	20 X 12.00 - 10	LG 307	199								
	20 X 6 - 10	AT 111	227								
	20 X 8.00 - 10	LG 306	195								
	24 X 11 - 10	AT 108	224								
	AT 18 X 10 - 10	AT 111	227								
	AT 19 X 6 - 10	AT 111	227								
	AT 20 X 10 - 10	AT 108	223	AT 112	222						
	AT 20 X 11 - 10	AT 111	227								
	AT 20 X 6 - 10	AT 111	227								
	AT 21 X 7 - 10	AT 110	226	AT 111	227						
	AT 22 X 11 - 10	AT 108	223	AT 111	227	W 207	220				
	AT 22 X 7 - 10	AT 111	227	W 207	220						
	AT 22 X 8 - 10	AT 108	223	AT 110	226	AT 111	228	W 207	220		
	AT 23 X 10 - 10	AT 108	223	W 207	220						
	AT 23 X 7 - 10	AT 110	226	AT 111	228	W 207	220				
	AT 23 X 8 - 10	AT 108	223	W 207	220						
	AT 24 X 11 - 10	AT 108	224	W 207	220						
AT 25 X 11 - 10	W 207	220									
AT 25 X 12 - 10	AT 108	224	W 207	220							



RIM DIAMETER (inches)	TIRE SIZE	PATTERN	PAGE	PATTERN	PAGE	PATTERN	PAGE				
11	AT 22 X 7 - 11	AT 108	224								
	AT 23 X 8 - 11	AT 108	224	W 207	221						
	AT 24 X 10 - 11	AT 108	224	W 207	221						
	AT 24 X 8 - 11	AT 108	224	W 207	221						
	AT 24 X 9 - 11	AT 108	224	W 207	221						
	AT 25 X 10 - 11	W 207	221								
AT 25 X 8 - 11	W 207	221									
12	4.00 - 12	TF 9090	157								
	6.5/80 - 12	AS 504	180								
	7.00 - 12	AS 504	181								
	7.00 - 12	AW 702	163								
	300/60 - 12	TRAC MASTER	202								
	300/65 - 12	RIB 775	178								
	10.0/80 - 12	AW 702	163	AW 909	171	RIB IMPLEMENT	174				
	11.0/65 - 12	AS 504	181								
	23 X 10.50 - 12	LG 306	196	TR 315	203						
	23 X 8.50 - 12	LG 306	196	TR 315	203						
	24 X 12.00 - 12	AT 316	87	LG 306							
	24 X 13.00 - 12	LG 408	200								
	26 X 12.00 - 12	LG 306	196	TR 315	203	TR 319	204				
	26.5 X 14.00 - 12	LG 408	200								
	AT 23 X 10 - 12	AT 112	222								
	AT 24 X 8 - 12	W 207	221								
	AT 25 X 10 - 12	AT 108	224	W 207	221						
	AT 25 X 11 - 12	W 207	221								
	AT 25 X 8 - 12	AT 108	224	W 207	221						
	AT 26 X 10 - 12	W 207	221								
	AT 26 X 12 - 12	W 207	221								
	AT 26 X 8 - 12	W 207	221								
AT 27 X 10 - 12	W 207	222									
AT 27 X 12 - 12	W 207	222									
AT 28 X 10 - 12	W 207	222									
AT 28 X 12 - 12	W 207	222									
14	6-14	TR 126	58								
	7-14	TR 126	58								
	9.5L - 14 SL	I - 1	207								
	11L - 14 SL	I - 1	207								
	24 X 8.50 - 14	LG 306	197								
	25 X 8.50 - 14	LG 306	197								
14.5	200/60 - 14.5	RIB 774 (B)	176	SL 441	192 / 212						
	250/65 - 14.5	RIB 774 (B)	176								
	8 - 14.5	LT TR 182	219	MH TR 182	218						

AGRICULTURAL BIAS TIRES



RIM DIAMETER (inches)	TIRE SIZE	PATTERN	PAGE	PATTERN	PAGE	PATTERN	PAGE	PATTERN	PAGE		
15	5.00 - 15	AS 504	182	TF 8181	154	TF 9090	157				
	6.5/80 - 15	AS 505	190								
	6.70 - 15 SL	I - 1	207								
	7.5L - 15	AS 504	182								
	185/65 - 15	AS 507	190								
	7.60 - 15 SL	I - 1	207								
	9.5L - 15 FI	FARM HIGHWAY SPECIAL	211								
	9.5L - 15 SL	I - 1	207	PRO RIB F2M	160						
	10.00 - 15 FI	FARM HIGHWAY SPECIAL	211								
	11L - 15 FI	FARM HIGHWAY SPECIAL	211								
	11L - 15 SL	I - 1	208	INDUSTRIAL RIB F3	206	POWER RIB F2	160	PRO RIB F2M	160		
	12.5L - 15 FI	FARM HIGHWAY SPECIAL	211								
	12.5L - 15 SL	I - 1	208								
	27 X 8.50 - 15	LG 306	197								
	27 X 10.50 - 15	LG 306	197								
	31 X 13.50 - 15	FLOTATION RIB IMPLEMENT	179								
	31 X 15.5 - 15	LG 306	197								
	31 X 15.50 - 15	TR 313	202	TR 315	203	TRAC MASTER	202				
33 X 12.5 - 15	AT 621	138									
33 X 15.50 - 15	TRAC MASTER	202									
15.3	10.0/75 - 15.3	AS 504	146 / 182	AW 702	163	AW 909	171	MP 567	140		
	11.5/80 - 15.3	AS 504	147 / 148	AW 702	164	AW 909	171	MP 567	140		
	12.5/80 - 15.3	AW 702	165	AW 909	172						
	260/70 - 15.3	AW 09	173	FARM 2000	77						
	300/80 - 15.3	AW 09	173	FARM 2000	77						
	320/80 - 15.3	AW 09	173								
	27 X 10 - 15.3	AS 504	148 / 184								
15.5	280/60 - 15.5	TR 678	132								
	400/60 - 15.5	AW 09	173	AW 708	170	RIB 900	178	TR 882	94 / 191		
16	4.00 - 16	TF 8181	154	TF 9090	157						
	4.50 - 16	TF 8181	154								
	5.00 - 16	TF 8181	154								
	5.50 - 16	TF 8181	154	TF 9090	157						
	6.00 - 16	AS 504	148 / 185	AW 702	165	STEER FARM	161				
	6.00 - 16	TF 8181	154	TF 9090	157						
	6.50 - 16	STEER FARM	161	TF 8181	154	TF 9090	157				
	7-16	TR 144	72								
	7.50 - 16	AS 504	148	STEER FARM	161	TF 8181	155	TF 9090	157		
	7.50 - 16 SL	I - 1	209								
	8-16	TR 144	72								
	9.00 - 16	BK 823	212			RIB F3	161	TF 9090	158		
9.00 - 16 SL	I - 1	209									



RIM DIAMETER (inches)	TIRE SIZE	PATTERN	PAGE	PATTERN	PAGE	PATTERN	PAGE	PATTERN	PAGE	PATTERN	PAGE		
16	9.5 - 16	TR 144	72										
	250/80 - 16	FARM 2000	77										
	10.00 - 16	TF 8181	155	TF 9090	158								
	10.00 - 16 SL	PRO RIB F2M	160										
	10.5/65 - 16	AW 702	165	RIB 774 (B)	176								
	10.50 - 16	AW 702	165										
	11.00 - 16	MULTI RIB	179	TF 8181	155	TF 9090	158						
	11.00 - 16 SL	PRO RIB F2M	160										
	11L - 16 SL	I - 1	208	INDUSTRIAL RIB F3	206								
	12.5/70 - 16	AT 621	138										
	12.5L - 16 SL	I - 1	209										
	13.0/55 - 16	AW 702	166										
	13.0/75 - 16	AW 702	166										
	13.6 - 16	LG 306	198										
	14.0/65 - 16	AW 705	168										
16.1	14L - 16.1 SL	I - 1	209	PRO RIB F2M	160								
	16.5L - 16.1 SL	I - 1	209										
	19L - 16.1 SL	I - 1	210										
	21.5L - 16.1 SL	I - 1	210										
16.5	33 X 15.50 - 16.5	LG 306	198										
17	15.0/55 - 17	AS 504	149 / 185	AW 705	168	AW 909	172	RIB 774 (A)	175				
	19.0/45 - 17	AS 504	149 / 185	AW 708	170	RIB 774 (C)	177						
	380/55 - 17	AW 09	173										
	420/55 - 17	AS 504	149										
	500/50 - 17	AW 708	170	FLOTATION 648	112								
	500/65 - 17	AW 708	170										
	49 - 17	RIB IMPLEMENT	174										
17.5	215/75 - 17.5	RIB 774 (C)	177	RIB MASTER	179								
	225/75 - 17.5	RIB 774 (C)	177										
18	7.50 - 18	AS 504	150 / 186	TF 8181	155	TF 9090	158						
	8 - 18	FARM 2000	77	TR 144	72								
	250/80 - 18	FARM 2000	77										
	10.5 - 18	MP 567	140	MP 600	145								
	10.5/80 - 18	AS 504	150	AT 603	137	AW 702	166						
	12.0 - 18	RIB 774 (B)	176										
	12.5 - 18	MP 567	140	MP 570	143	MP 600	145						
	12.5/80 - 18	AS 504	150 / 186	AT 603	137	AT 621	138	AW 702	166	TR 461	86		
	13.0/65 - 18	AW 702	167										
	14.5/80 - 18	AW 702	167										
	15.0/70 - 18	AW 705	168										
	15.5/60 - 18	AT 621	138										
	15.5/70 - 18	AT 621	138										
19	4.00 - 19	TF 9090	159										
	6.00 - 19	TF 8181	155	TF 9090	159								
19.5	18 - 19.5	MP 567	141										

AGRICULTURAL BIAS TIRES



RIM DIAMETER (inches)	TIRE SIZE	PATTERN	PAGE	PATTERN	PAGE	PATTERN	PAGE				
20	6.50 - 20	STEER FARM	161	TF 8181	156						
	7.50 - 20	AS 504	151 / 187	TF 8181	156	TF 9090	159				
	8.00 - 20	TR 135	59								
	8.3 - 20	FARM 2000	77	TR 144	72						
	9.5 - 20	TR 135	59								
	10.00 - 20	TR 135	59								
	10.5 - 20	MP 567	141	MP 585	144						
	11.2 - 20	TR 135	59	TRAC FARM	80						
	12.4 - 20	TR 135	59								
	12.5 - 20	MP 567	141	MP 570	143	MP 585	144				
	14.5 - 20	MP 567	142	MP 570	143						
	400/70 - 20	AS 504	151 / 188								
	16.0/70 - 20	AS 504	151 / 187	AW 705	169	MP 567	142				
	17.5/65 - 20	AT 621	139								
	500/55 - 20	FLOTATION 648	113								
	38 X 14.00 - 20	LG 306	198								
	42 X 17 - 20	AT 621	139								
	42 X 25 - 20	FLOTATION 351	110								
44 X 18.00 - 20	LG 306	198									
48 X 25 - 20	FLOTATION 351	110									
48 X 31 - 20	FLOTATION 351	110									
22	9.5 - 22	TR 144	72								
22.5	18 - 22.5	MP 590	144								
	350/65 - 22.5	FLOTATION 648	113								
	400/55 - 22.5	AW 705	169	FLOTATION 558	96 / 111						
	400/60 - 22.5	FLOTATION 648	113								
	500/45 - 22.5	FLOTATION 558	96 / 111								
	500/50 - 22.5	FLOTATION 648	114								
	500/60 - 22.5	FLOTATION 648	114	FLOTATION TR 675	126						
	550/45 - 22.5	FLOTATION 648	115	FLOTATION 648 T	125						
	550/60 - 22.5	FLOTATION 648	116	FLOTATION RIB 774	127	FLOTATION TR 675	126				
	600/50 - 22.5	FLOTATION 648	117								
	600/55 - 22.5	FLOTATION 648	118	FLOTATION RIB 774	127						
	650/45 - 22.5	TR 678	132								
	700/40 - 22.5	FLOTATION 648	118								
700/50 - 22.5	FLOTATION 648	119									
24	8.3 - 24	TR 135	59								
	9.00 - 24 SL	I - 1	210								
	9.5 - 24	TR 135	59								
	11.2 - 24	TR 117	97	TR 135	60						
	11.25 - 24 SL	I - 1	210								
	12.4 - 24	TR 135	60								
	13.6 - 24	TR 117	97	TR 135	60						
	14.9 - 24	TR 117	97	TR 135	61	TR 391	217				
	15.5/80 - 24	AS 504	152 / 189								
	400/80 - 24	AS 504	153 / 189								
	405/70 - 24	MP 600	145								
	16.5/85 - 24	AS 504	153 / 189								
	16.9 - 24	AT 621	139	TR 135	61	TR 461	86				
	17.5L - 24	AT 621	139								
19.5L - 24	AT 621	139	TR 461	86							
21L - 24	TR 461	86									
25	66 X 43 - 25	FLOTATION 351	110								
	66 X 43.00 - 25	FL 353	110								



RIM DIAMETER (inches)	TIRE SIZE	PATTERN	PAGE	PATTERN	PAGE	PATTERN	PAGE	PATTERN	PAGE	PATTERN	PAGE	PATTERN	PAGE	PATTERN	PAGE
26	14.9 - 26	TR 135	61												
	16.9 - 26	TR 135	62												
	18.4 - 26	AS 2001	79	AT 621	139	FS 216	129	TR 136	71	TR 387	214				
	23.1 - 26	FS 216	129	TR 135	62	TR 270	81	TR 273	83	TR 387	214	TR 390	216		
	28L - 26	FS 216	130	TR 390	216										
26.5	600/55 - 26.5	FLOTATION 648	120	FORESTECH	128										
	700/50 - 26.5	FLOTATION 648	121												
	710/45 - 26.5	FORESTECH	128												
	750/55 - 26.5	FORESTECH	128												
	800/45 - 26.5	FLOTATION 648	121												
28	8.3 - 28	TR 135	62												
	9.5 - 28	TR 135	62												
	11.2 - 28	TR 135	63												
	12.4 - 28	FARM 2000	77	TR 135	63	TR 136	71	TR 387	215	TRAC FARM	80				
	13.6 - 28	FARM 2000	78	TR 135	63	TRAC FARM	80								
	14.9 - 28	FARM 2000	78	TR 135	63										
	16.9 - 28	AS 2001	79	AT 621	139	FARM 2000	78	TR 387	215						
	16.9 - 28	TR 461	86	TRAC FARM	80										
18.4 - 28	TR 135	64													
30	7.2 - 30	TR 135	64												
	9.5 - 30	TR 135	64												
	14.9 - 30	TR 135	64												
	15 - 30	TR 135	64												
	16.9 - 30	AT 621	139	TR 135	64	TR 136	71	TR 387	215						
	18.4 - 30	FS 216	130	TR 135	64	TR 136	71	TR 270	81	TR 273	83	TR 387	215	TRAC FARM	80
23.1 - 30	TR 135	65	TR 270	81	TR 273	83									
30.5	650/65 - 30.5	FLOTATION 648	122												
	750/60 - 30.5	FLOTATION 648	123												
	850/50 - 30.5	FLOTATION 648	124												
32	8.3 - 32	TR 135	66												
	9.5 - 32	TR 135	66												
	12.4 - 32	TR 135	66												
	24.5 - 32	FS 216	131												
	24.5 - 32	TR 137	93												
	30.5L - 32	FS 216	131	TR 137	93										
	DH 35.5L - 32	FS 216	131												
	DW 500/95 D 32	STAR TRAC	92												
	VA 500/95 D 32	STAR TRAC	92												
34	16.9 - 34	TR 135	66												
	18.4 - 34	FS 216	131	TR 135	66	TR 270	81								
	23.1 - 34	TR 135	67	TR 270	81	TR 273	83								
	600/65 - 34	TR 678	132												
	700/55 - 34	TR 678	132												
36	8.3 - 36	TR 135	67												
	9.5 - 36	TR 135	67												
	12.4 - 36	TR 135	67												
	13.6 - 36	TR 135	68												
38	11.2 - 38	TR 117	97												
	12.4 - 38	TR 135	68												
	13.6 - 38	TR 133	58	TR 135	68										
	14.00 - 38	TR 135	69												
	15.5 - 38	TR 135	69												
	16.9 - 38	TR 135	69												
	18.4 - 38	TR 135	69	TR 270	82										
20.8 - 38	TR 135	70	TR 270	82											
42	9.5 - 42	TR 135	70												
	20.8 - 42	TR 135	70												





MAIN APPLICATION:
TRACTOR



AGRIMAX FORCE (R-1W)

RADIAL IF TECHNOLOGY TIRES

AGRIMAX FORCE, the high-end product of BKT, is a radial tire specially designed for agriculture applications with high-power tractors, ensuring top performance and efficiency. AGRIMAX FORCE is a really comfortable tire for both field operations and road transfers; it actually allows to move without the need for increasing the inflation pressure.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)										
		Rec.	Alt.							↓										
28"	IF 600/70 R 28	164 D	DW 21 B	DW 20 B	603	1551	694	4654	725	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4	
											km/h									
											from 10 to 65	2350	2700	3100	3500	3900	4300	4650	5000	
30"	IF 600/70 R 30	165 D	DW 21 B; DW 21 A	DW 20 A; DW 20 B	603	1602	708	4767	750	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4	
											km/h									
											from 10 to 65	2425	2785	3195	3605	4020	4430	4790	5150	
30"	IF 710/60 R 30	168 D	DW 25 B	-	708	1614	714	4814	750	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4	
											km/h									
											from 10 to 65	2580	2970	3420	3810	4260	4650	5155	5600	
34"	IF 600/70 R 34	167 D	DW 21 B; DW 21 A	DW 20 A; DW 20 B	603	1704	757	5070	800	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4	
											km/h									
											from 10 to 65	2565	2945	3380	3815	4255	4690	5070	5450	
34"	IF 650/65 R 34	161 D	DW 23 B	-	650	1710	764	5078	825	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6			
											km/h									
											from 10 to 65	2590	3055	3470	3885	4255	4625			
34"	IF 710/60 R 34	170 D	DW 25 B	-	708	1716	763	5137	825	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4	
											km/h									
											from 10 to 65	2760	3180	3660	4080	4560	4980	5520	6000	
38"	IF 900/60 R 38	184 D	DW 30 A; DW 30 B	TW 31 B	916	2045	904	5995	975	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4	
											km/h									
											from 10 to 65	4140	4770	5490	6120	6840	7470	8280	9000	
42"	IF 650/85 R 42	180 D	DW 21 B	DW 23 B; DW 20 B	650	2173	965	6400	1025	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4	
											km/h									
											from 10 to 65	3760	4320	4960	5600	6240	6880	7440	8000	

STD: Standard

Tolerances: O.D. ± 2% - S.W. ± 2% - RC ± 2.5%



MAIN APPLICATION:
TRACTOR



AGRIMAX FORCE (R-1W)

RADIAL IF TECHNOLOGY TIRES

AGRIMAX FORCE, the high-end product of BKT, is a radial tire specially designed for agriculture applications with high-power tractors, ensuring top performance and efficiency. AGRIMAX FORCE is a really comfortable tire for both field operations and road transfers; it actually allows to move without the need for increasing the inflation pressure.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)									
		Rec.	Alt.							↓									
42" IF 710/70 R 42	179 D	DW 25 B	-	716	2061	919	6200	975	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4	
										km/h									
										from 10 to 65	3565	4110	4730	5270	5890	6435	7130	7750	
IF 710/75 R 42	181 D	DW 25 B	-	716	2133	950	6350	1025	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4	
										km/h									
										from 10 to 65	3880	4455	5115	5775	6435	7095	7675	8250	
IF 900/60 R 42	186 D	DW 30 B	TW 30 B	916	2147	950	6457	1025	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4	
										km/h									
										from 10 to 65	4370	5035	5795	6460	7220	7885	8740	9500	

STD: Standard



MAIN APPLICATION:
TRACTOR



AGRIMAX FORTIS (R-1W)

RADIAL EXTRA LARGE TIRES

AGRIMAX FORTIS is your reliable partner for all preparation, planting and soil treatment operations. Designed to equip the latest, most modern and most powerful tractors, AGRIMAX FORTIS allows you to carry very high loads maximizing your business productivity.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)																																																											
		Rec.	Alt.							↓																																																											
											bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4																																																		
30"	600/70 R 30	158 D/161 A8	DW 20 B	DW 18 L; W 18 L	611	1602	724	4810	750	STD	km/h	65	50	40	30	10 LT	10 HT	2040	2380	2680	2975	3275	3530	3910	4250																																												
											34"	600/70 R 34	160 D/163 A8	DW 18 L	DW 20 B; W 18 L	611	1704	761	5109	800	STD	km/h	65	50	40	30	10 LT	10 HT	2160	2520	2835	3150	3465	3735	4140	4500																																	
																						38"	650/85 R 38	173 D/176 A8	DW 23 B	DW 21 B; DW 20 B	675	2071	935	6184	975	STD	bar	40	30	25	20	5 LT	5 HT	3120	3640	4095	4550	5005	5395	5980	6500																						
																																	800/70 R 38	178 D/181 A8	DW 25 B	DW 23 B; DW 27 B	798	2085	912	6202	975	STD	km/h	40	30	25	20	5 LT	5 HT	3600	4200	4725	5250	5775	6225	6900	7500												
																																											42"	710/75 R 42	175 D/172 E	DW 23 B	DW 25 B	716	2133	970	6375	1025	STD	bar	45	40	30	25	20	5 LT	5 HT	3025	3530	3970	4410	4855	5230	5800	6300
																																																						km/h	40	30	25	20	5 LT	5 HT	3315	3865	4350	4830	5315	5730	6350	6900	
																							bar	40	30	25	20	5 LT	5 HT	3480	4060	4565																						5075	5580	6015	6670	7245											
																							km/h	30	25	20	5 LT	5 HT	3630	4235	4765	5295	5825	6275	6960	7560																																	
bar	40	30	25	20	5 LT	5 HT	3810	4445	5000	5555													6110	6590	7305	7935																																											
km/h	5 LT	5 HT	4440	5180	5830	6475	7125	7680	8510	9250																																																											
bar	40	30	25	20	5 LT	5 HT	3810	4445	5000	5555	6110	6590	7305	7935																																																							

STD: Standard

Tolerances: O.D. ± 2% - S.W. ± 2% - RC ± 2.5%



MAIN APPLICATION:
TRACTOR



AGRIMAX SIRIO (R-1W)

FAST SPEED RADIAL TIRES

AGRIMAX SIRIO is the new high-speed tire (up to 70 km/h) developed by BKT for high-powered tractors. It has been designed to provide best performance both on the road and in the field. The high sidewall flexibility ensures outstanding comfort to improve the driving experience.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)												
		Rec.	Alt.							↓												
30"	540/65 R 30	150 D/147 E	W 16 L	W 18	530	1464	669	4400	700	HS	bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4			
											km/h	70	1450	1665	1910	2155	2400	2645	2860	3075		
												65	1575	1810	2080	2345	2615	2885	3120	3350		
												50	1655	1905	2185	2465	2750	3030	3275	3520		
												40	1725	1985	2280	2570	2865	3160	3415	3670		
												25	1870	2145	2465	2780	3100	3415	3695	3970		
												10	2365	2715	3120	3520	3920	4325	4675	5025		
													bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4	
													km/h	70	2235	2565	2945	3325	3705	4085	4420	4750
														65	2425	2785	3195	3605	4020	4430	4790	5150
			50	2425	2785	3195	3605	4020	4430	4790	5150											
			40	2425	2785	3195	3605	4020	4430	4790	5150											
			25	2425	2785	3195	3605	4020	4430	4790	5150											
			10	2425	2785	3195	3605	4020	4430	4790	5150											
34"	540/65 R 34	152 D/149 E	W 16 L	W 18	530	1566	721	4735	750	HS	bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4			
											km/h	70	1530	1755	2015	2275	2535	2795	3025	3250		
												65	1670	1920	2205	2485	2770	3055	3305	3550		
												50	1755	2015	2315	2615	2910	3210	3470	3730		
												40	1830	2105	2415	2725	3035	3350	3620	3890		
												25	1980	2275	2615	2950	3285	3625	3920	4210		
												10	2505	2880	3305	3730	4155	4580	4955	5325		
													bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4	
													km/h	70	1575	1810	2080	2345	2615	2885	3120	3350
														65	1720	1975	2265	2555	2850	3140	3395	3650
			50	1805	2075	2380	2685	2995	3300	3570	3835											
			40	1880	2160	2480	2800	3120	3440	3720	4000											
			25	2040	2340	2685	3035	3380	3725	4030	4330											
			10	2575	2960	3395	3835	4275	4710	5095	5475											
38"	540/65 R 38	153 D/150 E	W 16 L	W 18 L	530	1667	769	5050	800	HS	bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4			
											km/h	70	2635	3025	3475	3920	4370	4820	5210	5600		
												65	2895	3325	3815	4305	4800	5290	5720	6150		
												50	3040	3490	4010	4525	5040	5560	6010	6460		
												40	3170	3640	4180	4715	5255	5795	6265	6735		
												25	3430	3940	4520	5105	5690	6270	6780	7290		
												10	4340	4985	5720	6460	7200	7935	8580	9225		
													bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4	
													km/h	70	2635	3025	3475	3920	4370	4820	5210	5600
														65	2895	3325	3815	4305	4800	5290	5720	6150
			50	3040	3490	4010	4525	5040	5560	6010	6460											
			40	3170	3640	4180	4715	5255	5795	6265	6735											
			25	3430	3940	4520	5105	5690	6270	6780	7290											
			10	4340	4985	5720	6460	7200	7935	8580	9225											

HS: High speed version



MAIN APPLICATION:
TRACTOR



AGRIMAX RT 657 (R-1W)

RADIAL TRACTOR TIRES

AGRIMAX RT 657 is ideal for soil tillage and on-the-road usage; some sizes are also suitable for vineyard harvesting. This tire guarantees an excellent driving comfort as well as significant fuel savings. AGRIMAX RT 657 is the best choice for those who need a versatile and reliable tire, with no compromise on performance.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)									
		Rec.	Alt.							↓									
16"	320/65 R 16	117 D/120 A8	W 10	W 9; W 11	319	822	366	2466	390	STD	bar								
											km/h								
											0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4	
											65	605	710	810	900	990	1070	1185	1285
											50	635	745	855	945	1040	1125	1245	1350
											40	660	770	885	980	1080	1165	1290	1400
											30	700	815	935	1040	1140	1230	1365	1480
											10 LT	815	950	1090	1210	1330	1435	1590	1725
10 HT	700	815	935	1040	1140	1230	1365	1480											
18"	320/65 R 18	109 A8/B	W 10	W 9; W 11	319	873	392	2587	410	STD	bar								
											km/h								
											0.6	0.8	1.0	1.2	1.4	1.6			
											50	600	695	785	870	950	1030		
											40	600	695	785	870	950	1030		
											30	645	745	840	930	1020	1105		
											10 LT	805	930	1055	1165	1275	1385		
											10 HT	645	745	840	930	1020	1105		
20"	340/65 R 18	113 A8/B	W 11	W 10; W 12	343	899	400	2667	425	STD	bar								
											km/h								
											0.6	0.8	1.0	1.2	1.4	1.6			
											50	645	760	865	970	1060	1150		
											40	645	760	865	970	1060	1150		
											30	695	820	930	1040	1140	1235		
											10 LT	870	1020	1160	1300	1425	1545		
											10 HT	695	820	930	1040	1140	1235		
20"	340/65 R 20	124 D/127 A8	W 11	W 10; W 12	343	950	430	2892	450	STD	bar								
											km/h								
											0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4	
											65	755	880	1010	1120	1235	1330	1475	1600
											50	790	925	1060	1180	1295	1395	1550	1680
											40	825	965	1105	1225	1350	1455	1610	1750
											30	865	1015	1160	1290	1420	1530	1695	1840
											10 LT	1010	1180	1355	1505	1655	1785	1975	2145
10 HT	865	1015	1160	1290	1420	1530	1695	1840											
20"	420/65 R 20	135 D/138 A8	W 13	W 11; W 12	418	1054	468	3162	500	STD	bar								
											km/h								
											0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4	
											65	1025	1200	1375	1530	1680	1810	2010	2180
											50	1080	1260	1445	1605	1765	1905	2110	2290
											40	1110	1300	1490	1655	1820	1960	2175	2360
											30	1180	1385	1585	1760	1935	2085	2310	2510
											10 LT	1375	1610	1845	2050	2255	2430	2695	2925
10 HT	1180	1385	1585	1760	1935	2085	2310	2510											

STD: Standard

Tolerances: O.D. ± 2% - S.W. ± 2% - RC ± 2.5%



MAIN APPLICATION:
TRACTOR



AGRIMAX RT 657 (R-1W)

RADIAL TRACTOR TIRES

AGRIMAX RT 657 is ideal for soil tillage and on-the-road usage; some sizes are also suitable for vineyard harvesting. This tire guarantees an excellent driving comfort as well as significant fuel savings. AGRIMAX RT 657 is the best choice for those who need a versatile and reliable tire, with no compromise on performance.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)																				
		Rec.	Alt.							↓																				
											bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4											
20"	440/65 R 20	138 D/141 A8	W 14 L	W 1; W 15 L	441	1080	479	3240	525	STD	km/h	65	50	40	30	10 LT	10 HT	1110	1300	1490	1655	1820	1960	2175	2360					
											1170	1365	1565	1740	1910	2060	2285	2480												
											1215	1420	1625	1805	1985	2140	2370	2575												
											1280	1495	1715	1905	2095	2255	2500	2715												
											1490	1745	1995	2220	2440	2630	2915	3165												
											1280	1495	1715	1905	2095	2255	2500	2715												
											24"	420/65 R 24	138 D/141 A8	W 13	W 11; W 12	418	1156	519	3468	550	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
																						km/h	65	50	40	30	10 LT	10 HT	1110	1300
1170	1365	1565	1740	1910	2060	2285	2480																							
1215	1420	1625	1805	1985	2140	2370	2575																							
1280	1495	1715	1905	2095	2255	2500	2715																							
1490	1745	1995	2220	2440	2630	2915	3165																							
1280	1495	1715	1905	2095	2255	2500	2715																							
	440/65 R 24	135 D/138 A8	W 14 L	W 13; W 15 L	441	1182	538	3546	575	STD												bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
											km/h	65	50	40	30	10 LT	10 HT	1050	1225	1375	1530	1680	1810	2010	2180					
											1100	1285	1445	1605	1765	1905	2110	2290												
											1135	1325	1490	1655	1820	1960	2175	2360												
											1205	1410	1585	1760	1935	2085	2310	2510												
											1405	1640	1845	2050	2255	2430	2695	2925												
											1205	1410	1585	1760	1935	2085	2310	2510												
												480/65 R 24	140 D/143 A8	W 15 L	W 14 L	479	1234	562	3730	600	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
km/h	65	50	40	30	10 LT	10 HT	1200	1400	1575	1750												1925	2075	2300	2500					
1260	1470	1655	1840	2025	2180	2415	2625																							
1310	1530	1720	1910	2100	2265	2510	2725																							
1380	1610	1815	2015	2215	2390	2645	2875																							
1610	1880	2115	2345	2580	2785	3085	3350																							
1380	1610	1815	2015	2215	2390	2645	2875																							
	540/65 R 24	146 D/149 A8	W 16 L	W 18 L	530	1312	590	3930	625	STD												bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
											km/h	65	50	40	30	10 LT	10 HT	1440	1680	1890	2100	2310	2490	2760	3000					
											1515	1765	1985	2205	2430	2615	2900	3150												
											1560	1820	2050	2275	2505	2700	2990	3250												
											1660	1935	2175	2415	2660	2865	3175	3450												
											1930	2255	2535	2815	3100	3340	3700	4020												
											1660	1935	2175	2415	2660	2865	3175	3450												

STD: Standard



MAIN APPLICATION:
TRACTOR



AGRIMAX RT 657 (R-1W)

RADIAL TRACTOR TIRES

AGRIMAX RT 657 is ideal for soil tillage and on-the-road usage; some sizes are also suitable for vineyard harvesting. This tire guarantees an excellent driving comfort as well as significant fuel savings. AGRIMAX RT 657 is the best choice for those who need a versatile and reliable tire, with no compromise on performance.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)														
		Rec.	Alt.							↓														
											bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4					
28" 440/65 R 28	138 D/141 A8	W 14 L	W 13 ; W 15 L	441	1283	590	3878	625	STD	km/h	65	50	40	30	10 LT	10 HT	1135	1325	1490	1655	1820	1960	2175	2360
										65	1195	1390	1565	1740	1910	2060	2285	2480						
										50	1240	1445	1625	1805	1985	2140	2370	2575						
										40	1305	1525	1715	1905	2095	2255	2500	2715						
										30	1520	1775	1995	2220	2440	2630	2915	3165						
										10 LT	1305	1525	1715	1905	2095	2255	2500	2715						
										10 HT														
480/65 R 28	142 D/145 A8	W 15 L	W 14 L	479	1335	610	4058	650	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4						
										km/h	65	50	40	30	10 LT	10 HT	1275	1485	1670	1855	2045	2200	2440	2650
										65	1340	1560	1755	1950	2145	2315	2565	2785						
										50	1395	1625	1830	2030	2235	2410	2670	2900						
										40	1465	1710	1925	2135	2350	2535	2810	3050						
										30	1710	1995	2240	2490	2740	2955	3275	3555						
										10 LT	1465	1710	1925	2135	2350	2535	2810	3050						
										10 HT														
540/65 R 28	149 D/152 A8	W 16 L	W 18 L	530	1413	643	4253	675	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4						
										km/h	65	50	40	30	10 LT	10 HT	1560	1820	2050	2275	2505	2700	2990	3250
										65	1640	1915	2155	2395	2630	2835	3145	3415						
										50	1705	1990	2240	2485	2735	2950	3270	3550						
										40	1800	2095	2360	2620	2880	3105	3445	3740						
										30	2095	2440	2745	3050	3355	3615	4010	4355						
										10 LT	1800	2095	2360	2620	2880	3105	3445	3740						
										10 HT														
600/65 R 28	154 D/157 A8	DW 20 B	W 18 L	611	1491	670	4470	700	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4						
										km/h	65	50	40	30	10 LT	10 HT	1800	2100	2365	2625	2890	3115	3450	3750
										65	1895	2210	2485	2760	3035	3275	3625	3940						
										50	1980	2310	2600	2890	3180	3425	3795	4125						
										40	2075	2420	2720	3025	3325	3585	3970	4315						
										30	2415	2815	3170	3520	3870	4175	4625	5025						
										10 LT	2075	2420	2720	3025	3325	3585	3970	4315						
										10 HT														

STD: Standard

Tolerances: O.D. ± 2% - S.W. ± 2% - RC ± 2.5%



MAIN APPLICATION:
TRACTOR



AGRIMAX RT 657 (R-1W)

RADIAL TRACTOR TIRES

AGRIMAX RT 657 is ideal for soil tillage and on-the-road usage; some sizes are also suitable for vineyard harvesting. This tire guarantees an excellent driving comfort as well as significant fuel savings. AGRIMAX RT 657 is the best choice for those who need a versatile and reliable tire, with no compromise on performance.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)										
		Rec.	Alt.							↓										
											bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4	
30"											km/h									
540/65 R 30	150 D/153 A8	W 16 L	W 18 L	530	1464	670	4403	700	STD	65	1610	1880	2115	2345	2580	2785	3085	3350		
										50	1690	1975	2220	2465	2715	2925	3240	3520		
										40	1755	2045	2300	2555	2815	3030	3360	3650		
										30	1855	2160	2430	2700	2970	3200	3550	3855		
										10 LT	2160	2515	2830	3145	3460	3730	4135	4490		
										10 HT	1855	2160	2430	2700	2970	3200	3550	3855		
600/65 R 30	155 D/158 A8	DW 20 B	W 18 L	611	1542	697	4609	725	STD	65	1860	2170	2445	2715	2985	3220	3565	3875		
										50	1955	2280	2565	2850	3135	3380	3745	4070		
										40	2040	2380	2680	2975	3275	3530	3910	4250		
										30	2145	2500	2810	3125	3435	3705	4105	4460		
										10 LT	2495	2910	3275	3640	4005	4315	4780	5195		
										10 HT	2145	2500	2810	3125	3435	3705	4105	4460		
										34"										
540/65 R 34	152 D/155 A8	W 16 L	W 18 L	530	1566	712	4742	750	STD	65	1705	1990	2240	2485	2735	2950	3270	3550		
										50	1795	2090	2350	2615	2875	3100	3435	3730		
										40	1860	2170	2445	2715	2985	3220	3565	3875		
										30	1965	2290	2575	2860	3150	3395	3760	4085		
										10 LT	2285	2670	3000	3335	3670	3955	4380	4760		
										10 HT	1965	2290	2575	2860	3150	3395	3760	4085		
600/65 R 34	157 D/160 A8	DW 20 B	W 18 L	611	1644	742	4960	775	STD	65	1980	2310	2600	2890	3180	3425	3795	4125		
										50	2085	2430	2735	3035	3340	3600	3990	4335		
										40	2160	2520	2835	3150	3465	3735	4140	4500		
										30	2280	2660	2990	3325	3655	3940	4370	4745		
										10 LT	2655	3100	3485	3875	4260	4590	5090	5530		
										10 HT	2280	2660	2990	3325	3655	3940	4370	4745		

STD: Standard



MAIN APPLICATION:
TRACTOR



AGRIMAX RT 657 (R-1W)

RADIAL TRACTOR TIRES

AGRIMAX RT 657 is ideal for soil tillage and on-the-road usage; some sizes are also suitable for vineyard harvesting. This tire guarantees an excellent driving comfort as well as significant fuel savings. AGRIMAX RT 657 is the best choice for those who need a versatile and reliable tire, with no compromise on performance.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)									
		Rec.	Alt.							↓									
											bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
38"	540/65 R 38	153 D/156 A8	W 16 L	W 18 L	530	1667	760	5059	800	STD	km/h	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
											65	1755	2045	2300	2555	2815	3030	3360	3650
											50	1845	2150	2420	2685	2955	3185	3530	3835
											40	1920	2240	2520	2800	3080	3320	3680	4000
											30	2020	2355	2650	2940	3235	3490	3865	4200
											10 LT	2350	2745	3085	3430	3770	4065	4505	4895
											10 HT	2020	2355	2650	2940	3235	3490	3865	4200
											600/65 R 38	159 D/162 A8	DW 20 B	W 18 L	611	1745	790	5247	825
65	2100	2450	2760	3065	3370	3635	4025	4375											
50	2210	2575	2895	3220	3540	3815	4230	4595											
40	2280	2660	2995	3325	3660	3945	4370	4750											
30	2420	2820	3175	3525	3880	4180	4635	5035											
10 LT	2820	3285	3695	4110	4520	4870	5400	5865											
10 HT	2420	2820	3175	3525	3880	4180	4635	5035											
38"	650/65 R 38	163 D/166 A8	DW 20 B	-	645	1811	830	5483	875	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
											km/h	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
											65	2340	2730	3075	3415	3755	4050	4485	4875
											50	2460	2870	3230	3585	3945	4250	4715	5120
											40	2545	2970	3340	3710	4085	4400	4880	5300
											30	2695	3145	3535	3930	4320	4660	5165	5610
											10 LT	3140	3660	4120	4575	5035	5425	6015	6535
											10 HT	2695	3145	3535	3930	4320	4660	5165	5610
42"	650/65 R 42	165 D/168 A8	DW 20 B	-	645	1913	878	5824	925	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
											km/h	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4
											65	2475	2885	3245	3605	3970	4275	4740	5150
											50	2600	3030	3410	3790	4170	4495	4980	5410
											40	2690	3140	3530	3920	4315	4650	5155	5600
											30	2845	3320	3735	4150	4565	4920	5455	5925
											10 LT	3315	3870	4355	4835	5320	5735	6355	6905
											10 HT	2845	3320	3735	4150	4565	4920	5455	5925

STD: Standard



MAIN APPLICATION:
TRACTOR



AGRIMAX RT 765 (R-1W)

RADIAL TRACTOR TIRES

AGRIMAX RT 765, a BKT 70 series tire, is suitable for cutting-edge tractors for several heavy-duty applications such as soil tillage, field and road transport, vineyard harvesting, and spraying. A wide contact patch ensures the best possible traction on all surfaces at any time.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)										
		Rec.	Alt.							↓										
16"	200/70 R 16	94 A8/B	W 6	-	197	686	313	2058	330	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4	
											km/h	50	315	365	420	470	525	580	625	670
											40	315	365	420	470	525	580	625	670	
											30	340	390	450	505	565	620	670	720	
											10 LT	425	490	560	630	705	775	840	900	
											10 HT	340	390	450	505	565	620	670	720	
											bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4	
											km/h	50	315	365	420	470	525	580	625	670
											40	315	365	420	470	525	580	625	670	
											30	340	390	450	505	565	620	670	720	
10 LT	425	490	560	630	705	775	840	900												
10 HT	340	390	450	505	565	620	670	720												
220/70 R 16	94 A8/B	W 7	-	221	715	324	2145	330	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4		
										km/h	50	315	365	420	470	525	580	625	670	
										40	315	365	420	470	525	580	625	670		
										30	340	390	450	505	565	620	670	720		
										10 LT	425	490	560	630	705	775	840	900		
										10 HT	340	390	450	505	565	620	670	720		
										bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4		
										km/h	50	315	365	420	470	525	580	625	670	
										40	315	365	420	470	525	580	625	670		
										30	340	390	450	505	565	620	670	720		
10 LT	425	490	560	630	705	775	840	900												
10 HT	340	390	450	505	565	620	670	720												
240/70 R 16	104 A8/B	W 8	W 8 L; W 9 L	244	742	335	2226	350	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4		
										km/h	50	425	490	560	630	705	775	840	900	
										40	425	490	560	630	705	775	840	900		
										30	455	525	600	680	755	830	900	965		
										10 LT	570	655	755	850	945	1045	1130	1210		
										10 HT	455	525	600	680	755	830	900	965		
										bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4		
										km/h	50	485	560	640	725	805	890	960	1030	
										40	485	560	640	725	805	890	960	1030		
										30	520	600	690	775	865	955	1030	1105		
10 LT	650	750	860	970	1080	1190	1285	1380												
10 HT	520	600	690	775	865	955	1030	1105												
260/70 R 16	109 A8/B	W 8	W 8 L; W 9 L	258	770	346	2310	360	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4		
										km/h	50	485	560	640	725	805	890	960	1030	
										40	485	560	640	725	805	890	960	1030		
										30	520	600	690	775	865	955	1030	1105		
										10 LT	650	750	860	970	1080	1190	1285	1380		
										10 HT	520	600	690	775	865	955	1030	1105		
										bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4		
										km/h	50	530	605	695	785	875	965	1045	1120	
										40	530	605	695	785	875	965	1045	1120		
										30	565	650	745	840	940	1035	1120	1200		
10 LT	710	815	935	1055	1175	1295	1400	1505												
10 HT	565	650	745	840	940	1035	1120	1200												
18"	280/70 R 18	114 A8/B	W 9	W 8; W 10	282	849	381	2520	410	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4	
											km/h	50	555	640	735	830	925	1015	1100	1180
											40	555	640	735	830	925	1015	1100	1180	
											30	595	685	785	890	990	1090	1180	1265	
											10 LT	745	860	985	1110	1240	1365	1475	1585	
											10 HT	595	685	785	890	990	1090	1180	1265	

STD: Standard



MAIN APPLICATION:
TRACTOR



AGRIMAX RT 765 (R-1W)

RADIAL TRACTOR TIRES

AGRIMAX RT 765, a BKT 70 series tire, is suitable for cutting-edge tractors for several heavy-duty applications such as soil tillage, field and road transport, vineyard harvesting, and spraying. A wide contact patch ensures the best possible traction on all surfaces at any time.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)																
		Rec.	Alt.							↓																
20" 260/70 R 20	113 A8/B	W 8	9; W 9	258	872	402	2639	410	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4								
										km/h	50	40	30	10 LT	10 HT	545	625	715	805	900	990	1070	1150			
										bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4	590	675	775	875	975	1075	1165	1250
										km/h	50	40	30	10 LT	10 HT	590	675	775	875	975	1075	1165	1250	1340	1675	1880
										bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4	660	760	870	980	1095	1205	1305	1400
										km/h	50	40	30	10 LT	10 HT	660	760	870	980	1095	1205	1305	1400	1500	1880	2080
										bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4	730	840	965	1085	1210	1335	1445	1550
										km/h	50	40	30	10 LT	10 HT	730	840	965	1085	1210	1335	1445	1550	1660	2080	2140
										bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4	870	1000	1150	1295	1445	1595	1725	1850
										km/h	50	40	30	10 LT	10 HT	870	1000	1150	1295	1445	1595	1725	1850	1980	2480	2680
320/70 R 20	123 A8/B	W 10	W 9; W 11	319	982	445	2965	475	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4								
										km/h	50	40	30	10 LT	10 HT	730	840	965	1085	1210	1335	1445	1550			
										bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4	785	900	1030	1165	1295	1430	1545	1660
										km/h	50	40	30	10 LT	10 HT	785	900	1030	1165	1295	1430	1545	1660	1845	2140	2480
										bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4	940	1080	1240	1400	1560	1720	1860	2000
										km/h	50	40	30	10 LT	10 HT	940	1080	1240	1400	1560	1720	1860	2000	2140	2680	2880
										bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4	940	1080	1240	1400	1560	1720	1860	2000
										km/h	50	40	30	10 LT	10 HT	940	1080	1240	1400	1560	1720	1860	2000	2140	2680	2880
										bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4	1010	1160	1330	1500	1670	1845	1995	2140
										km/h	50	40	30	10 LT	10 HT	1010	1160	1330	1500	1670	1845	1995	2140	2480	2680	2880

STD: Standard

Tolerances: O.D. ± 2% - S.W. ± 2% - RC ± 2.5%



MAIN APPLICATION:
TRACTOR



AGRIMAX RT 765 (R-1W)

RADIAL TRACTOR TIRES

AGRIMAX RT 765, a BKT 70 series tire, is suitable for cutting-edge tractors for several heavy-duty applications such as soil tillage, field and road transport, vineyard harvesting, and spraying. A wide contact patch ensures the best possible traction on all surfaces at any time.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)							
		Rec.	Alt.							↓							
24"	320/70 R 24	116 A8/B	W 10	W 9; W 11	319	1094	502	3245	525	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6
											km/h	690	800	915	1025	1140	1250
											50	690	800	915	1025	1140	1250
											40	740	860	980	1100	1220	1340
											30	925	1075	1225	1375	1525	1675
											10 LT	740	860	980	1100	1220	1340
											10 HT	740	860	980	1100	1220	1340
											bar	0.6	0.8	1.0	1.2	1.4	1.6
											km/h	825	960	1095	1230	1365	1500
											50	825	960	1095	1230	1365	1500
											40	885	1030	1175	1320	1465	1605
											30	1110	1290	1470	1650	1830	2010
10 LT	885	1030	1175	1320	1465	1605											
10 HT	885	1030	1175	1320	1465	1605											
24"	360/70 R 24	122 A8/B	W 11	W 10; W 12	357	1152	519	3400	550	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6
											km/h	910	1060	1205	1355	1505	1650
											50	910	1060	1205	1355	1505	1650
											40	975	1135	1295	1455	1615	1770
											30	1220	1420	1620	1820	2020	2215
											10 LT	975	1135	1295	1455	1615	1770
											10 HT	975	1135	1295	1455	1615	1770
											bar	0.6	0.8	1.0	1.2	1.4	1.6
											km/h	1045	1220	1390	1560	1730	1900
											50	1045	1220	1390	1560	1730	1900
											40	1120	1305	1490	1670	1855	2035
											30	1405	1635	1865	2095	2325	2550
10 LT	1120	1305	1490	1670	1855	2035											
10 HT	1120	1305	1490	1670	1855	2035											
24"	420/70 R 24	130 A8/B	W 13	W 12; W 14 L	418	1248	554	3680	600	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6
											km/h	1300	1515	1725	1940	2150	2360
											50	1300	1515	1725	1940	2150	2360
											40	1390	1620	1845	2075	2300	2525
											30	1740	2025	2310	2595	2880	3165
											10 LT	1390	1620	1845	2075	2300	2525
											10 HT	1390	1620	1845	2075	2300	2525
											bar	0.6	0.8	1.0	1.2	1.4	1.6
											km/h	910	1060	1205	1355	1505	1650
											50	910	1060	1205	1355	1505	1650
											40	975	1135	1295	1455	1615	1770
											30	1220	1420	1620	1820	2020	2215
10 LT	975	1135	1295	1455	1615	1770											
10 HT	975	1135	1295	1455	1615	1770											
28"	360/70 R 28	125 A8/B	W 11	W 10; W 12	357	1251	579	3767	600	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6
											km/h	910	1060	1205	1355	1505	1650
											50	910	1060	1205	1355	1505	1650
											40	975	1135	1295	1455	1615	1770
											30	1220	1420	1620	1820	2020	2215
											10 LT	975	1135	1295	1455	1615	1770
											10 HT	975	1135	1295	1455	1615	1770

STD: Standard



MAIN APPLICATION:
TRACTOR



AGRIMAX RT 765 (R-1W)

RADIAL TRACTOR TIRES

AGRIMAX RT 765, a BKT 70 series tire, is suitable for cutting-edge tractors for several heavy-duty applications such as soil tillage, field and road transport, vineyard harvesting, and spraying. A wide contact patch ensures the best possible traction on all surfaces at any time.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)								
		Rec.	Alt.							↓								
28"	380/70 R 28	127 A8/B	W 12	W 11; W 13	380	1293	586	3883	625	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6	
											km/h	50	965	1120	1280	1435	1595	1750
											40	965	1120	1280	1435	1595	1750	
											30	1035	1200	1370	1540	1710	1875	
											10 LT	1290	1505	1715	1925	2135	2345	
											10 HT	1035	1200	1370	1540	1710	1875	
											bar	0.6	0.8	1.0	1.2	1.4	1.6	
km/h	50	1135	1320	1505	1690	1875	2060											
40	1135	1320	1505	1690	1875	2060												
30	1215	1415	1610	1810	2010	2205												
10 LT	1525	1770	2020	2270	2520	2765												
10 HT	1215	1415	1610	1810	2010	2205												
30"	420/70 R 30	134 A8/B	W 13	W 12; W 14 L	418	1398	631	4172	675	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6	
											km/h	50	1170	1360	1550	1740	1930	2120
											40	1170	1360	1550	1740	1930	2120	
											30	1250	1455	1660	1865	2070	2270	
											10 LT	1565	1825	2080	2335	2590	2845	
											10 HT	1250	1455	1660	1865	2070	2270	
											bar	0.6	0.8	1.0	1.2	1.4	1.6	
km/h	50	1420	1650	1880	2115	2345	2575											
40	1420	1650	1880	2115	2345	2575												
30	1520	1770	2015	2265	2515	2760												
10 LT	1905	2215	2525	2835	3145	3455												
10 HT	1520	1770	2015	2265	2515	2760												
30"	600/70 R 30	152 A8/B	DW 20 B	DW 18 L; W 18 L	591	1602	711	4774	750	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6	
											km/h	50	1955	2275	2595	2915	3235	3550
											40	1955	2275	2595	2915	3235	3550	
											30	2090	2435	2775	3120	3460	3800	
											10 LT	2620	3050	3475	3905	4335	4760	
											10 HT	2090	2435	2775	3120	3460	3800	
											bar	0.6	0.8	1.0	1.2	1.4	1.6	
km/h	50	1955	2275	2595	2915	3235	3550											
40	1955	2275	2595	2915	3235	3550												
30	2090	2435	2775	3120	3460	3800												
10 LT	2620	3050	3475	3905	4335	4760												
10 HT	2090	2435	2775	3120	3460	3800												

STD: Standard

Tolerances: O.D. ± 2% - S.W. ± 2% - RC ± 2.5%



MAIN APPLICATION:
TRACTOR



AGRIMAX RT 765 (R-1W)

RADIAL TRACTOR TIRES

AGRIMAX RT 765, a BKT 70 series tire, is suitable for cutting-edge tractors for several heavy-duty applications such as soil tillage, field and road transport, vineyard harvesting, and spraying. A wide contact patch ensures the best possible traction on all surfaces at any time.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)																						
		Rec.	Alt.							↓																						
34"	480/70 R 34	149 A8/B	W 15 L	W 14 L; W 16 L	479	1580	711	4759	750	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4													
											km/h																					
											50	1530	1755	2015	2275	2535	2795	3025	3250													
											40	1530	1755	2015	2275	2535	2795	3025	3250													
											30	1640	1880	2160	2440	2715	2995	3240	3480													
											10 LT	2050	2355	2705	3050	3400	3750	4055	4355													
											10 HT	1640	1880	2160	2440	2715	2995	3240	3480													
34"	520/70 R 34	148 A8/B	W 16 L	W 15 L; W 18 L	516	1640	739	4901	775	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6															
											km/h																					
											50	1735	2020	2300	2585	2870	3150															
											40	1735	2020	2300	2585	2870	3150															
											30	1860	2160	2465	2770	3075	3375															
											10 LT	2325	2705	3085	3465	3845	4225															
											10 HT	1860	2160	2465	2770	3075	3375															
38"	480/70 R 38	145 A8/B	W 15 L	W 14 L; W 16 L	479	1681	764	5015	800	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6															
											km/h																					
											50	1595	1860	2120	2380	2640	2900															
											40	1595	1860	2120	2380	2640	2900															
											30	1710	1990	2270	2550	2830	3105															
											10 LT	2140	2490	2840	3190	3540	3890															
											10 HT	1710	1990	2270	2550	2830	3105															
38"	520/70 R 38	150 A8/B	W 16 L	W 15 L; W 18 L	516	1749	793	5300	825	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6															
											km/h																					
											50	1845	2145	2450	2750	3050	3350															
											40	1845	2145	2450	2750	3050	3350															
											30	1975	2295	2620	2940	3265	3585															
											10 LT	2470	2875	3280	3685	4090	4490															
											10 HT	1975	2295	2620	2940	3265	3585															
38"	580/70 R 38	155 A8/B	W 18 L	-	577	1827	821	5505	875	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6															
											km/h																					
											50	2135	2480	2830	3180	3530	3875															
											40	2135	2480	2830	3180	3530	3875															
											30	2285	2660	3030	3405	3780	4150															
											10 LT	2860	3325	3795	4260	4730	5195															
											10 HT	2285	2660	3030	3405	3780	4150															
38"	580/70 R 38	180 A8	W 18 L	-	577	1827	821	5505	875	SB	bar	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	4.4	4.6											
											km/h																					
											50	3180	3875	4490	4990	5460	5890	6310	6710	7090	7280											
											40	3180	3875	4930	5480	6000	6470	6930	7370	7790	8000											
											30	3405	4150	5280	5860	6420	6920	7420	7890	8340	8560											
											25	3535	4305	5470	6080	6660	7180	7690	8180	8650	8880											

STD: Standard
SB: Steel Belted Version



MAIN APPLICATION:
TRACTOR



AGRIMAX RT 765 (R-1W)

RADIAL TRACTOR TIRES

AGRIMAX RT 765, a BKT 70 series tire, is suitable for cutting-edge tractors for several heavy-duty applications such as soil tillage, field and road transport, vineyard harvesting, and spraying. A wide contact patch ensures the best possible traction on all surfaces at any time.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)																			
		Rec.	Alt.							↓																			
											bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4	2.8	3.2								
38"	620/70 R 38	170 A8/B	DW 20 B	-	625	1833	828	5591	875	STD	km/h	2340	2760	3180	3540	3960	4320	4680	5100	5580	6000								
											50	2340	2760	3180	3540	3960	4320	4680	5100	5580	6000								
											40	2505	2955	3405	3790	4240	4625	5010	5460	5975	6420								
											30	3140	3700	4265	4745	5310	5790	6275	6835	7480	8040								
											10LT	2505	2955	3405	3790	4240	4625	5010	5460	5975	6420								
											10HT	2505	2955	3405	3790	4240	4625	5010	5460	5975	6420								
38"	710/70 R 38	166 A8/B	DW 23 B	-	716	1959	859	5751	925	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6												
											km/h	2915	3395	3870	4350	4825	5300												
											50	2915	3395	3870	4350	4825	5300												
											40	3125	3635	4145	4655	5165	5675												
											30	3910	4550	5190	5830	6470	7105												
											10 HT	3125	3635	4145	4655	5165	5675												
38"	710/70 R 38	178 A8/B	DW 23 B	-	716	1959	859	5751	925	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4	2.8	2.9								
											km/h	2915	3395	3870	4350	4825	5300	6035	6720	7350	7500								
											50	2915	3395	3870	4350	4825	5300	6035	6720	7350	7500								
											40	3125	3635	4145	4655	5165	5675	6460	7195	7865	8025								
											30	3910	4550	5190	5830	6470	7105	8090	9005	9850	10050								
											10 HT	3125	3635	4145	4655	5165	5675	6460	7195	7865	8025								
42"	620/70 R 42	160 A8/B	DW 20 B	-	625	1935	876	5742	925	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6												
											km/h	2475	2880	3285	3690	4095	4500												
											50	2475	2880	3285	3690	4095	4500												
											40	2650	3085	3515	3950	4385	4815												
											30	3320	3860	4405	4945	5490	6030												
											10 HT	2650	3085	3515	3950	4385	4815												
42"	620/70 R 42	166 A8/B	DW 20 B	-	625	1935	876	5742	925	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4										
											km/h	2475	2880	3285	3690	4095	4500	4930	5300										
											50	2475	2880	3285	3690	4095	4500	4930	5300										
											40	2650	3085	3515	3950	4385	4815	5275	5670										
											30	3320	3860	4405	4945	5490	6030	6605	7100										
											10 HT	2650	3085	3515	3950	4385	4815	5275	5670										

STD: Standard



MAIN APPLICATION:
TRACTOR



AGRIMAX RT 765 (R-1W)

RADIAL TRACTOR TIRES

AGRIMAX RT 765, a BKT 70 series tire, is suitable for cutting-edge tractors for several heavy-duty applications such as soil tillage, field and road transport, vineyard harvesting, and spraying. A wide contact patch ensures the best possible traction on all surfaces at any time.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)									
		Rec.	Alt.							↓									
42"	710/70 R 42	173 A8/B	DW 23 B	-	716	2061	922	6174	975	STD	bar								
											km/h								
											0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4	
											50	3055	3510	4030	4550	5070	5590	6045	6500
											40	3055	3510	4030	4550	5070	5590	6045	6500
											30	3270	3760	4315	4870	5425	5985	6470	6955
											10 LT	4095	4705	5405	6100	6795	7495	8105	8710
											10 HT	3270	3760	4315	4870	5425	5985	6470	6955
											bar								
											km/h								
0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4												
65	3120	3640	4095	4550	5005	5395	5980	6500											
50	3280	3825	4300	4780	5260	5665	6280	6825											
40	3410	3980	4475	4970	5470	5895	6535	7100											
30	3590	4190	4710	5235	5760	6205	6880	7475											
10 LT	4185	4880	5490	6100	6710	7230	8015	8710											
10 HT	3590	4190	4710	5235	5760	6205	6880	7475											
46"	620/70 R 46	162 A8/B	DW 20 B	-	625	2036	906	6047	975	STD	bar								
											km/h								
											0.6	0.8	1.0	1.2	1.4	1.6			
											50	2615	3040	3470	3895	4325	4750		
											40	2615	3040	3470	3895	4325	4750		
											30	2800	3255	3715	4170	4630	5085		
											10 LT	3505	4075	4650	5220	5795	6365		
											10 HT	2800	3255	3715	4170	4630	5085		

STD: Standard



MAIN APPLICATION:
TRACTOR



AGRIMAX RT 855 (R-1W)

RADIAL TRACTOR TIRES

AGRIMAX RT 855 is a tire featuring excellent traction and comfort properties. It has been designed mainly for soil tillage and field and road transport, but some sizes are also suitable for row crop, spraying and vineyard harvesting. AGRIMAX RT 855 has excellent self-cleaning features that allow for a quick change from field operations to road usage.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)																																																																																	
		Rec.	Alt.																																																																																								
16"	180/95 R 16 (6.50 R 16)	105 A8/B	5.5 F	6.0 F	185	760	340	2265	360	STD	<table border="1"> <tr><td colspan="9">bar</td></tr> <tr><td>0.8</td><td>1.2</td><td>1.6</td><td>2.0</td><td>2.4</td><td>2.8</td><td>3.2</td><td>3.6</td><td></td></tr> <tr><td>km/h</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>50</td><td>430</td><td>550</td><td>670</td><td>735</td><td>790</td><td>865</td><td>925</td><td>-</td></tr> <tr><td>40</td><td>430</td><td>550</td><td>670</td><td>735</td><td>790</td><td>865</td><td>925</td><td>-</td></tr> <tr><td>30</td><td>460</td><td>585</td><td>715</td><td>785</td><td>845</td><td>925</td><td>990</td><td>-</td></tr> <tr><td>10</td><td>505</td><td>655</td><td>795</td><td>950</td><td>1085</td><td>1130</td><td>1255</td><td>1390</td></tr> </table>									bar									0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6		km/h									50	430	550	670	735	790	865	925	-	40	430	550	670	735	790	865	925	-	30	460	585	715	785	845	925	990	-	10	505	655	795	950	1085	1130	1255	1390									
											bar																																																																																
											0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6																																																																									
											km/h																																																																																
											50	430	550	670	735	790	865	925	-																																																																								
40	430	550	670	735	790	865	925	-																																																																																			
30	460	585	715	785	845	925	990	-																																																																																			
10	505	655	795	950	1085	1130	1255	1390																																																																																			
210/95 R 16 (7.50 R 16)	106 A8/B	W 6.5	W 6; W 7	209	806	360	2415	390	STD	<table border="1"> <tr><td colspan="9">bar</td></tr> <tr><td>0.6</td><td>0.8</td><td>1.0</td><td>1.2</td><td>1.4</td><td>1.6</td><td>2.0</td><td>2.4</td><td></td></tr> <tr><td>km/h</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>50</td><td>450</td><td>515</td><td>590</td><td>665</td><td>745</td><td>820</td><td>885</td><td>950</td></tr> <tr><td>40</td><td>450</td><td>515</td><td>590</td><td>665</td><td>745</td><td>820</td><td>885</td><td>950</td></tr> <tr><td>30</td><td>480</td><td>555</td><td>635</td><td>715</td><td>800</td><td>880</td><td>950</td><td>1020</td></tr> <tr><td>10 LT</td><td>600</td><td>690</td><td>795</td><td>895</td><td>995</td><td>1100</td><td>1190</td><td>1275</td></tr> <tr><td>10 HT</td><td>480</td><td>555</td><td>635</td><td>715</td><td>800</td><td>880</td><td>950</td><td>1020</td></tr> </table>									bar									0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4		km/h									50	450	515	590	665	745	820	885	950	40	450	515	590	665	745	820	885	950	30	480	555	635	715	800	880	950	1020	10 LT	600	690	795	895	995	1100	1190	1275	10 HT	480	555	635	715	800	880	950	1020	
										bar																																																																																	
										0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4																																																																										
										km/h																																																																																	
										50	450	515	590	665	745	820	885	950																																																																									
40	450	515	590	665	745	820	885	950																																																																																			
30	480	555	635	715	800	880	950	1020																																																																																			
10 LT	600	690	795	895	995	1100	1190	1275																																																																																			
10 HT	480	555	635	715	800	880	950	1020																																																																																			
18"	210/95 R 18 (7.50 R 18)	108 A8/B	W 7	W 6	214	855	385	2565	410	STD	<table border="1"> <tr><td colspan="9">bar</td></tr> <tr><td>0.6</td><td>0.8</td><td>1.0</td><td>1.2</td><td>1.4</td><td>1.6</td><td>2.0</td><td>2.4</td><td></td></tr> <tr><td>km/h</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>50</td><td>470</td><td>540</td><td>620</td><td>700</td><td>780</td><td>860</td><td>930</td><td>1000</td></tr> <tr><td>40</td><td>470</td><td>540</td><td>620</td><td>700</td><td>780</td><td>860</td><td>930</td><td>1000</td></tr> <tr><td>30</td><td>505</td><td>580</td><td>665</td><td>750</td><td>835</td><td>925</td><td>1000</td><td>1070</td></tr> <tr><td>10 LT</td><td>630</td><td>725</td><td>835</td><td>940</td><td>1050</td><td>1155</td><td>1250</td><td>1340</td></tr> <tr><td>10 HT</td><td>505</td><td>580</td><td>665</td><td>750</td><td>835</td><td>925</td><td>1000</td><td>1070</td></tr> </table>									bar									0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4		km/h									50	470	540	620	700	780	860	930	1000	40	470	540	620	700	780	860	930	1000	30	505	580	665	750	835	925	1000	1070	10 LT	630	725	835	940	1050	1155	1250	1340	10 HT	505	580	665	750	835	925	1000	1070
											bar																																																																																
											0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4																																																																									
											km/h																																																																																
											50	470	540	620	700	780	860	930	1000																																																																								
40	470	540	620	700	780	860	930	1000																																																																																			
30	505	580	665	750	835	925	1000	1070																																																																																			
10 LT	630	725	835	940	1050	1155	1250	1340																																																																																			
10 HT	505	580	665	750	835	925	1000	1070																																																																																			
20"	210/90 R 20 (8.3 R 20)	110 A8/B	W 7	W 6	211	890	412	2681	425	STD	<table border="1"> <tr><td colspan="9">bar</td></tr> <tr><td>0.6</td><td>0.8</td><td>1.0</td><td>1.2</td><td>1.4</td><td>1.6</td><td>2.0</td><td>2.4</td><td></td></tr> <tr><td>km/h</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>50</td><td>500</td><td>575</td><td>660</td><td>745</td><td>830</td><td>915</td><td>990</td><td>1060</td></tr> <tr><td>40</td><td>500</td><td>575</td><td>660</td><td>745</td><td>830</td><td>915</td><td>990</td><td>1060</td></tr> <tr><td>30</td><td>535</td><td>615</td><td>705</td><td>795</td><td>890</td><td>980</td><td>1060</td><td>1135</td></tr> <tr><td>10 LT</td><td>670</td><td>770</td><td>885</td><td>1000</td><td>1115</td><td>1230</td><td>1330</td><td>1425</td></tr> <tr><td>10 HT</td><td>535</td><td>615</td><td>705</td><td>795</td><td>890</td><td>980</td><td>1060</td><td>1135</td></tr> </table>									bar									0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4		km/h									50	500	575	660	745	830	915	990	1060	40	500	575	660	745	830	915	990	1060	30	535	615	705	795	890	980	1060	1135	10 LT	670	770	885	1000	1115	1230	1330	1425	10 HT	535	615	705	795	890	980	1060	1135
											bar																																																																																
											0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4																																																																									
											km/h																																																																																
											50	500	575	660	745	830	915	990	1060																																																																								
40	500	575	660	745	830	915	990	1060																																																																																			
30	535	615	705	795	890	980	1060	1135																																																																																			
10 LT	670	770	885	1000	1115	1230	1330	1425																																																																																			
10 HT	535	615	705	795	890	980	1060	1135																																																																																			
210/95 R 20 (7.50 R 20)	110 A8/B	W 7	W 6	214	908	418	2749	450	STD	<table border="1"> <tr><td colspan="9">bar</td></tr> <tr><td>0.6</td><td>0.8</td><td>1.0</td><td>1.2</td><td>1.4</td><td>1.6</td><td>2.0</td><td>2.4</td><td></td></tr> <tr><td>km/h</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>50</td><td>500</td><td>575</td><td>660</td><td>745</td><td>830</td><td>915</td><td>990</td><td>1060</td></tr> <tr><td>40</td><td>500</td><td>575</td><td>660</td><td>745</td><td>830</td><td>915</td><td>990</td><td>1060</td></tr> <tr><td>30</td><td>535</td><td>615</td><td>705</td><td>795</td><td>890</td><td>980</td><td>1060</td><td>1135</td></tr> <tr><td>10 LT</td><td>670</td><td>770</td><td>885</td><td>1000</td><td>1115</td><td>1230</td><td>1330</td><td>1425</td></tr> <tr><td>10 HT</td><td>535</td><td>615</td><td>705</td><td>795</td><td>890</td><td>980</td><td>1060</td><td>1135</td></tr> </table>									bar									0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4		km/h									50	500	575	660	745	830	915	990	1060	40	500	575	660	745	830	915	990	1060	30	535	615	705	795	890	980	1060	1135	10 LT	670	770	885	1000	1115	1230	1330	1425	10 HT	535	615	705	795	890	980	1060	1135	
										bar																																																																																	
										0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4																																																																										
										km/h																																																																																	
										50	500	575	660	745	830	915	990	1060																																																																									
40	500	575	660	745	830	915	990	1060																																																																																			
30	535	615	705	795	890	980	1060	1135																																																																																			
10 LT	670	770	885	1000	1115	1230	1330	1425																																																																																			
10 HT	535	615	705	795	890	980	1060	1135																																																																																			
250/85 R 20 (9.5 R 20)	116 A8/B	W 8	W 7; W 9	250	940	424	2812	450	STD	<table border="1"> <tr><td colspan="9">bar</td></tr> <tr><td>0.6</td><td>0.8</td><td>1.0</td><td>1.2</td><td>1.4</td><td>1.6</td><td>2.0</td><td>2.4</td><td></td></tr> <tr><td>km/h</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>50</td><td>590</td><td>675</td><td>775</td><td>875</td><td>975</td><td>1075</td><td>1165</td><td>1250</td></tr> <tr><td>40</td><td>590</td><td>675</td><td>775</td><td>875</td><td>975</td><td>1075</td><td>1165</td><td>1250</td></tr> <tr><td>30</td><td>630</td><td>725</td><td>835</td><td>940</td><td>1050</td><td>1155</td><td>1250</td><td>1340</td></tr> <tr><td>10 LT</td><td>790</td><td>905</td><td>1040</td><td>1175</td><td>1310</td><td>1445</td><td>1560</td><td>1675</td></tr> <tr><td>10 HT</td><td>630</td><td>725</td><td>835</td><td>940</td><td>1050</td><td>1155</td><td>1250</td><td>1340</td></tr> </table>									bar									0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4		km/h									50	590	675	775	875	975	1075	1165	1250	40	590	675	775	875	975	1075	1165	1250	30	630	725	835	940	1050	1155	1250	1340	10 LT	790	905	1040	1175	1310	1445	1560	1675	10 HT	630	725	835	940	1050	1155	1250	1340	
										bar																																																																																	
										0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4																																																																										
										km/h																																																																																	
										50	590	675	775	875	975	1075	1165	1250																																																																									
40	590	675	775	875	975	1075	1165	1250																																																																																			
30	630	725	835	940	1050	1155	1250	1340																																																																																			
10 LT	790	905	1040	1175	1310	1445	1560	1675																																																																																			
10 HT	630	725	835	940	1050	1155	1250	1340																																																																																			

STD: Standard

Tolerances: O.D. ± 2% - S.W. ± 2% - RC ± 2.5%



MAIN APPLICATION:
TRACTOR



AGRIMAX RT 855 (R-1W)

RADIAL TRACTOR TIRES

AGRIMAX RT 855 is a tire featuring excellent traction and comfort properties. It has been designed mainly for soil tillage and field and road transport, but some sizes are also suitable for row crop, spraying and vineyard harvesting. AGRIMAX RT 855 has excellent self-cleaning features that allow for a quick change from field operations to road usage.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)							
		Rec.	Alt.							↓							
20"	280/85 R 20 (11.2 R 20)	112 A8/B	W 10	W 9	292	984	441	2952	475	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6
											km/h						
											50	620	720	820	920	1020	1120
											40	620	720	820	920	1020	1120
											30	660	770	880	985	1095	1200
											10 LT	830	965	1100	1235	1370	1505
	10 HT	660	770	880	985	1095	1200										
	320/85 R 20 (12.4 R 20)	119 A8/B	W 11	W 9; W 10	329	1052	467	3100	500	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6
											km/h						
											50	750	875	995	1120	1240	1360
											40	750	875	995	1120	1240	1360
											30	805	935	1070	1200	1330	1460
10 LT											1005	1170	1335	1500	1665	1825	
10 HT	805	935	1070	1200	1330	1460											
24"	250/85 R 24 (9.5 R 24)	109 A8/B	W 8	W 7; W 9	251	1036	475	3104	500	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6
											km/h						
											50	570	660	755	845	940	1030
											40	570	660	755	845	940	1030
											30	610	710	810	910	1010	1105
											10 LT	765	890	1015	1140	1265	1385
	10 HT	610	710	810	910	1010	1105										
	280/85 R 24 (11.2 R 24)	115 A8/B	W 10	W 9	292	1086	492	3224	525	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6
											km/h						
											50	670	780	890	1000	1110	1215
											40	670	780	890	1000	1110	1215
											30	720	840	955	1075	1190	1305
											10 LT	900	1045	1190	1340	1485	1630
	10 HT	720	840	955	1075	1190	1305										
	320/85 R 24 (12.4 R 24)	122 A8/B	W 11	W 9; W 10	329	1154	518	3424	550	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6
											km/h						
											50	825	960	1095	1230	1365	1500
											40	825	960	1095	1230	1365	1500
											30	885	1030	1175	1320	1465	1605
											10 LT	1110	1290	1470	1650	1830	2010
	10 HT	885	1030	1175	1320	1465	1605										
	340/85 R 24 (13.6 R 24)	125 A8/B	W 12	W 11	353	1188	531	3540	575	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6
											km/h						
											50	910	1060	1205	1355	1505	1650
40											910	1060	1205	1355	1505	1650	
30											975	1135	1295	1455	1615	1770	
10 LT											1220	1420	1620	1820	2020	2215	
10 HT	975	1135	1295	1455	1615	1770											

STD: Standard



MAIN APPLICATION:
TRACTOR



AGRIMAX RT 855 (R-1W)

RADIAL TRACTOR TIRES

AGRIMAX RT 855 is a tire featuring excellent traction and comfort properties. It has been designed mainly for soil tillage and field and road transport, but some sizes are also suitable for row crop, spraying and vineyard harvesting. AGRIMAX RT 855 has excellent self-cleaning features that allow for a quick change from field operations to road usage.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)																		
		Rec.	Alt.							↓																		
											bar	0.6	0.8	1.0	1.2	1.4	1.6											
24" 380/85 R 24 (14.9 R 24)	131 A8/B	W 12	W 11; W 13	380	1256	554	3699	600	STD	km/h	50	40	30	10 LT	10 HT													
										bar	1075	1250	1425	1600	1775	1950												
										bar	1075	1250	1425	1600	1775	1950												
										bar	1150	1340	1530	1715	1905	2090												
										bar	1440	1675	1910	2145	2380	2615												
										bar	1150	1340	1530	1715	1905	2090												
										bar	1150	1340	1530	1715	1905	2090												
420/85 R 24 (16.9 R 24)	137 A8/B	W 15 L	W 14 L; W 13	438	1324	582	3900	625	STD	km/h	50	40	30	10 LT	10 HT													
										bar	1265	1475	1680	1890	2095	2300												
										bar	1265	1475	1680	1890	2095	2300												
										bar	1360	1580	1800	2025	2245	2465												
										bar	1700	1975	2255	2530	2810	3085												
										bar	1360	1580	1800	2025	2245	2465												
										bar	1360	1580	1800	2025	2245	2465												
28" 250/85 R 28 (9.5 R 28)	112 A8/B	W 8	W 7; W 9	251	1137	519	3421	550	STD	km/h	50	40	30	10 LT	10 HT													
										bar	620	720	820	920	1020	1120												
										bar	620	720	820	920	1020	1120												
										bar	660	770	880	985	1095	1200												
										bar	830	965	1100	1235	1370	1505												
										bar	660	770	880	985	1095	1200												
										bar	660	770	880	985	1095	1200												
280/85 R 28 (11.2 R 28)	118 A8/B	W 10	W 9	292	1187	545	3558	575	STD	km/h	50	40	30	10 LT	10 HT													
										bar	730	845	965	1085	1205	1320												
										bar	730	845	965	1085	1205	1320												
										bar	780	910	1035	1165	1290	1415												
										bar	975	1135	1295	1455	1615	1770												
										bar	780	910	1035	1165	1290	1415												
										bar	780	910	1035	1165	1290	1415												
320/85 R 28 (12.4 R 28)	124 A8/B	W 11	W 9; W 10	329	1255	569	3743	600	STD	km/h	50	40	30	10 LT	10 HT													
										bar	880	1025	1170	1315	1460	1600												
										bar	880	1025	1170	1315	1460	1600												
										bar	945	1100	1255	1410	1565	1715												
										bar	1180	1375	1570	1760	1955	2145												
										bar	945	1100	1255	1410	1565	1715												
										bar	945	1100	1255	1410	1565	1715												
340/85 R 28 (13.6 R 28)	127 A8/B	W 12	W 11	353	1289	588	3890	625	STD	km/h	50	40	30	10 LT	10 HT													
										bar	965	1120	1280	1435	1595	1750												
										bar	965	1120	1280	1435	1595	1750												
										bar	1035	1200	1370	1540	1710	1875												
										bar	1290	1505	1715	1925	2135	2345												
										bar	1035	1200	1370	1540	1710	1875												
										bar	1035	1200	1370	1540	1710	1875												

STD: Standard

Tolerances: O.D. ± 2% - S.W. ± 2% - RC ± 2.5%



MAIN APPLICATION:
TRACTOR



AGRIMAX RT 855 (R-1W)

RADIAL TRACTOR TIRES

AGRIMAX RT 855 is a tire featuring excellent traction and comfort properties. It has been designed mainly for soil tillage and field and road transport, but some sizes are also suitable for row crop, spraying and vineyard harvesting. AGRIMAX RT 855 has excellent self-cleaning features that allow for a quick change from field operations to road usage.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)							
		Rec.	Alt.							↓							
											bar	0.6	0.8	1.0	1.2	1.4	1.6
28"	380/85 R 28 (14.9 R 28)	133 A8/B	W 12	W 11; W 13	380	1357	606	4015	650	STD	km/h	0.6	0.8	1.0	1.2	1.4	1.6
											50	1135	1320	1505	1690	1875	2060
											40	1135	1320	1505	1690	1875	2060
											30	1215	1415	1610	1810	2010	2205
											10 LT	1525	1770	2020	2270	2520	2765
											10 HT	1215	1415	1610	1810	2010	2205
	420/85 R 28 (16.9 R 28)	139 A8/B	W 15 L	W 13; W 14 L	438	1425	638	4214	675	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6
											km/h	0.6	0.8	1.0	1.2	1.4	1.6
											50	1340	1560	1775	1995	2215	2430
											40	1340	1560	1775	1995	2215	2430
											30	1435	1670	1905	2140	2375	2605
											10 LT	1795	2090	2380	2675	2970	3260
10 HT	1435	1670	1905	2140	2375	2605											
30"	380/85 R 30 (14.9 R 30)	135 A8/B	W 12	W 11; W 13	380	1408	633	4169	675	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6
											km/h	0.6	0.8	1.0	1.2	1.4	1.6
											50	1200	1400	1595	1790	1985	2180
											40	1200	1400	1595	1790	1985	2180
											30	1285	1495	1705	1915	2125	2335
											10 LT	1610	1875	2140	2400	2665	2925
10 HT	1285	1495	1705	1915	2125	2335											
	420/85 R 30 (16.9 R 30)	140 A8/B	W 15 L	W 13; W 14 L	438	1475	661	4393	700	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6
											km/h	0.6	0.8	1.0	1.2	1.4	1.6
											50	1375	1600	1825	2050	2275	2500
											40	1375	1600	1825	2050	2275	2500
											30	1475	1715	1955	2195	2435	2675
											10 LT	1845	2145	2450	2750	3050	3350
10 HT	1475	1715	1955	2195	2435	2675											
	460/85 R 30 (18.4 R 30)	145 A8/B	W 16 L	W 14 L; W 15 L	475	1544	682	4537	725	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6
											km/h	0.6	0.8	1.0	1.2	1.4	1.6
											50	1595	1860	2120	2380	2640	2900
											40	1595	1860	2120	2380	2640	2900
											30	1710	1990	2270	2550	2830	3105
											10 LT	2140	2490	2840	3190	3540	3890
10 HT	1710	1990	2270	2550	2830	3105											
32"	320/85 R 32 (12.4 R 32)	126 A8/B	W 11	W 9; W 10	329	1357	621	4081	650	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6
											km/h	0.6	0.8	1.0	1.2	1.4	1.6
											50	935	1090	1245	1395	1550	1700
											40	935	1090	1245	1395	1550	1700
											30	1005	1165	1330	1495	1660	1820
											10 LT	1255	1460	1665	1870	2075	2280
10 HT	1005	1165	1330	1495	1660	1820											

STD: Standard



MAIN APPLICATION:
TRACTOR



AGRIMAX RT 855 (R-1W)

RADIAL TRACTOR TIRES

AGRIMAX RT 855 is a tire featuring excellent traction and comfort properties. It has been designed mainly for soil tillage and field and road transport, but some sizes are also suitable for row crop, spraying and vineyard harvesting. AGRIMAX RT 855 has excellent self-cleaning features that allow for a quick change from field operations to road usage.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)										
		Rec.	Alt.							↓										
											bar	0.6	0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6
											km/h									
34" 320/85 R 34 (12.4 R 34)	141 A8/B	W 11	W 9; W 10	329	1408	645	4280	675	STD	bar	0.6	0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6	
										km/h										
										50	930	1085	1420	1730	1880	2010	2190	2370	2575	
										40	930	1085	1420	1730	1880	2010	2190	2370	2575	
										30	995	1160	1520	1850	2015	2155	2350	2540	2760	
										10 LT	1245	1455	1905	2315	2525	2695	2940	3180	3455	
10 HT	995	1160	1520	1850	2015	2155	2350	2540	2760											
380/85 R 34 (14.9 R 34)	137 A8/B	W 12	W 11; W 13	380	1509	682	4504	725	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6				
										km/h										
										50	1265	1475	1680	1890	2095	2300				
										40	1265	1475	1680	1890	2095	2300				
										30	1360	1580	1800	2025	2245	2465				
										10 LT	1700	1975	2255	2530	2810	3085				
10 HT	1360	1580	1800	2025	2245	2465														
420/85 R 34 (16.9 R 34)	142 A8/B	W 15 L	W 13; W 14 L	438	1578	709	4677	750	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6				
										km/h										
										50	1460	1700	1935	2175	2415	2650				
										40	1460	1700	1935	2175	2415	2650				
										30	1565	1820	2075	2330	2585	2840				
										10 LT	1960	2280	2600	2920	3240	3555				
10 HT	1565	1820	2075	2330	2585	2840														
460/85 R 34 (18.4 R 34)	147 A8/B	W 16 L	W 14 L; W 15 L	475	1646	721	4865	775	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6				
										km/h										
										50	1695	1970	2245	2525	2800	3075				
										40	1695	1970	2245	2525	2800	3075				
										30	1815	2110	2410	2705	3000	3295				
										10 LT	2270	2640	3015	3385	3755	4125				
10 HT	1815	2110	2410	2705	3000	3295														
36" 320/85 R 36 (12.4 R 36)	128 A8/B	W 11	W 9; W 10	329	1458	672	4404	700	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6				
										km/h										
										50	990	1155	1315	1480	1640	1800				
										40	990	1155	1315	1480	1640	1800				
										30	1065	1240	1410	1585	1760	1930				
										10 LT	1330	1550	1765	1985	2200	2415				
10 HT	1065	1240	1410	1585	1760	1930														
340/85 R 36 (13.6 R 36)	132 A8/B	W 12	W 11	353	1492	689	4507	725	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6				
										km/h										
										50	1100	1280	1460	1640	1820	2000				
										40	1100	1280	1460	1640	1820	2000				
										30	1180	1370	1565	1755	1950	2140				
										10 LT	1475	1720	1960	2200	2440	2680				
10 HT	1180	1370	1565	1755	1950	2140														

STD: Standard

Tolerances: O.D. ± 2% - S.W. ± 2% - RC ± 2.5%



MAIN APPLICATION:
TRACTOR



AGRIMAX RT 855 (R-1W)

RADIAL TRACTOR TIRES

AGRIMAX RT 855 is a tire featuring excellent traction and comfort properties. It has been designed mainly for soil tillage and field and road transport, but some sizes are also suitable for row crop, spraying and vineyard harvesting. AGRIMAX RT 855 has excellent self-cleaning features that allow for a quick change from field operations to road usage.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)															
		Rec.	Alt.							↓															
											bar	0.6	0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6					
											km/h														
38" 320/85 R 38 (12.4 R 38)	143 A8/B	W 10	W 9; W 11; DW 11	319	1509	700	4580	725	STD	bar	0.6	0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6						
										km/h															
										50	985	1145	1500	1830	1990	2130	2320	2510	2725						
										40	985	1145	1500	1830	1990	2130	2320	2510	2725						
										30	1055	1230	1610	1960	2135	2280	2485	2690	2920						
										10 LT	1320	1540	2015	2450	2670	2855	3110	3365	3655						
10 HT	1055	1230	1610	1960	2135	2280	2485	2690	2920																
340/85 R 38 (13.6 R 38)	133 A8/B	W 12	W 11	353	1543	712	4613	750	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6									
										km/h															
										50	1135	1320	1505	1690	1875	2060									
										40	1135	1320	1505	1690	1875	2060									
										30	1215	1415	1610	1810	2010	2205									
										10 LT	1525	1770	2020	2270	2520	2765									
10 HT	1215	1415	1610	1810	2010	2205																			
380/85 R 38 (14.9 R 38)	139 A8/B	W 12	W 11; W 13	380	1611	736	4841	775	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6									
										km/h															
										50	1340	1560	1775	1995	2215	2430									
										40	1340	1560	1775	1995	2215	2430									
										30	1435	1670	1905	2140	2375	2605									
										10 LT	1795	2090	2380	2675	2970	3260									
10 HT	1435	1670	1905	2140	2375	2605																			
420/85 R 38 (16.9 R 38)	144 A8/B	W 15 L	W 13; W 14 L	438	1679	763	4992	800	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6									
										km/h															
										50	1540	1795	2045	2300	2550	2800									
										40	1540	1795	2045	2300	2550	2800									
										30	1650	1920	2190	2460	2730	3000									
										10 LT	2070	2405	2745	3080	3420	3755									
10 HT	1650	1920	2190	2460	2730	3000																			
460/85 R 38 (18.4 R 38)	149 A8/B	W 16 L	W 14 L; W 15 L	475	1747	785	5161	825	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6									
										km/h															
										50	1790	2080	2375	2665	2960	3250									
										40	1790	2080	2375	2665	2960	3250									
										30	1915	2230	2545	2855	3170	3480									
										10 LT	2400	2790	3180	3575	3965	4355									
10 HT	1915	2230	2545	2855	3170	3480																			
480/80 R 38 (18.4 R 38)	149 A8/B	W 16 L	W 14 L; W 15 L	475	1747	785	5161	825	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6									
										km/h															
										50	1790	2080	2375	2665	2960	3250									
										40	1790	2080	2375	2665	2960	3250									
										30	1915	2230	2545	2855	3170	3480									
										10 LT	2400	2790	3180	3575	3965	4355									
10 HT	1915	2230	2545	2855	3170	3480																			

STD: Standard



MAIN APPLICATION:
TRACTOR



AGRIMAX RT 855 (R-1W)

RADIAL TRACTOR TIRES

AGRIMAX RT 855 is a tire featuring excellent traction and comfort properties. It has been designed mainly for soil tillage and field and road transport, but some sizes are also suitable for row crop, spraying and vineyard harvesting. AGRIMAX RT 855 has excellent self-cleaning features that allow for a quick change from field operations to road usage.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)											
		Rec.	Alt.							↓											
38"	520/85 R 38 (20.8 R 38)	155 A8/B	DW 16 L	DW 18 L; DD 16 L	516	1849	813	5393	875	STD	bar										
											km/h										
											0.6	0.8	1.0	1.2	1.4	1.6					
											50	2170	2560	2910	3255	3565	3875				
											40	2170	2560	2910	3255	3565	3875				
											30	2325	2740	3115	3490	3820	4150				
											10 LT	2910	3430	3900	4365	4780	5195				
10 HT	2325	2740	3115	3490	3820	4150															
38"	520/85 R 38 (20.8 R 38)	170 A8/B	DW 16 L	DW 18 L; DD 16 L	516	1849	813	5393	875	STD	bar										
											km/h										
											0.6	0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6		
											50	2170	2560	3255	3875	4440	4740	5220	5640	6000	
											40	2170	2560	3255	3875	4440	4740	5220	5640	6000	
											30	2325	2740	3490	4150	4755	5075	5590	6035	6420	
											10 LT	2910	3430	4365	5195	5950	6355	6995	7560	8040	
10 HT	2325	2740	3490	4150	4755	5075	5590	6035	6420												
42"	480/80 R 42 (18.4 R 42)	151 A8/B	W 16 A; DD 16; DW 16 A	DD 16 L; DW 16 L; W 16 L	479	1835	835	5459	875	STD	bar										
											km/h										
											0.6	0.8	1.0	1.2	1.4	1.6					
											50	1900	2210	2520	2830	3140	3450				
											40	1900	2210	2520	2830	3140	3450				
											30	2035	2365	2700	3030	3365	3695				
											10 LT	2545	2960	3380	3795	4210	4625				
10 HT	2035	2365	2700	3030	3365	3695															
42"	520/85 R 42 (20.8 R 42)	157 A8/B	DW 16 A; W 16 A; DD 16	DW 18 A; DD 18; W 18 A; DD 18 L	516	1951	858	5735	925	STD	bar										
											km/h										
											0.6	0.8	1.0	1.2	1.4	1.6					
											50	2270	2640	3015	3385	3755	4125				
											40	2270	2640	3015	3385	3755	4125				
											30	2430	2830	3225	3625	4020	4415				
											10 LT	3045	3540	4040	4535	5035	5530				
10 HT	2430	2830	3225	3625	4020	4415															
42"	520/85 R 42 (20.8 R 42)	167 A8/B	DW 16 A; W 16 A; DD 16	DW 18 A; DD 18; W 18 A; DD 18 L	516	1951	858	5735	925	STD	bar										
											km/h										
											0.6	0.8	1.0	1.2	1.4	1.6	2.4	2.8	3.2		
											50	2270	2640	3015	3385	3755	4125	4635	5070	5450	
											40	2270	2640	3015	3385	3755	4125	4635	5070	5450	
											30	2430	2830	3225	3625	4020	4415	4960	5425	5830	
											10 LT	3045	3540	4040	4535	5035	5530	6210	6795	7305	
10 HT	2430	2830	3225	3625	4020	4415	4960	5425	5830												

STD: Standard



MAIN APPLICATION:
TRACTOR



AGRIMAX RT 855 (R-1W)

RADIAL TRACTOR TIRES

AGRIMAX RT 855 is a tire featuring excellent traction and comfort properties. It has been designed mainly for soil tillage and field and road transport, but some sizes are also suitable for row crop, spraying and vineyard harvesting. AGRIMAX RT 855 has excellent self-cleaning features that allow for a quick change from field operations to road usage.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)																					
		Rec.	Alt.							↓																					
46" 420/80 R 46 (16.9 R 46)	151 D/162 A2	W 13	W 12	418	1840	863	5619	875	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4													
										km/h	65	1625	1865	2140	2415	2695	2970	3210	3450												
											50	1705	1960	2250	2540	2830	3120	3375	3625												
											40	1780	2045	2345	2650	2950	3255	3520	3780												
											30	1870	2145	2465	2780	3100	3415	3695	3970												
											10	2235	2565	2945	3325	3705	4085	4420	4750												
											10 LT	2175	2500	2870	3240	3610	3980	4305	4625												
											10 HT	1870	2145	2465	2780	3100	3415	3695	3970												
										420/80 R 46 (16.9 R 46)	159 D/170 A2	W 13	W 12	418	1840	863	5619	875	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4	2.8	3.2	
																				km/h	65	1625	1865	2140	2415	2695	2970	3210	3450	4070	4375
	50	1705	1960	2250	2540	2830	3120	3375	3625											4275	4595										
	40	1780	2045	2345	2650	2950	3255	3520	3780											4460	4795										
	30	1870	2145	2465	2780	3100	3415	3695	3970											4685	5035										
	10	2235	2565	2945	3325	3705	4085	4420	4750											5580	6000										
	10 LT	2175	2500	2870	3240	3610	3980	4305	4625											5455	5865										
	10 HT	1870	2145	2465	2780	3100	3415	3695	3970											4685	5035										
480/80 R 46 (18.4 R 46)	158 A8/B	DW 16 A; W 16 A; DD 16	W 16 L; DD 16 L; DW 16 L	479	1936	895	5871	925	STD											bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4			
																				km/h	50	2000	2295	2635	2975	3315	3655	3955	4250		
											40	2000	2295	2635	2975	3315	3655	3955	4250												
											30	2140	2460	2825	3185	3550	3915	4235	4550												
											10 LT	2680	3080	3535	3990	4445	4900	5300	5695												
											10 HT	2140	2460	2825	3185	3550	3915	4235	4550												
										480/80 R 46 (18.4 R 46)	164 A8/B	DW 16 A; W 16 A; DD 16	W 16 L; DD 16 L; DW 16 L	479	1936	895	5871	925	STD	bar	0.8	1.0	1.2	1.4	1.6	2.0	2.4	2.8	3.2		
																				km/h	50	2295	2635	2975	3315	3655	3955	4250	4650	5000	
																					40	2295	2635	2975	3315	3655	3955	4250	4650	5000	
																					30	2460	2825	3185	3550	3915	4235	4550	4975	5350	
	10 LT	3080	3535	3990	4445	4900	5300	5695	6230											6700											
	10 HT	2460	2825	3185	3550	3915	4235	4550	4975											5350											
520/85 R 46 (20.8 R 46)	158 A8/B	DW 16 L; W 16 A; W 16 L; DD 16	DW 18 L; W 18 L; W 18 A	516	2052	949	6252	975	STD											bar	0.6	0.8	1.0	1.2	1.4	1.6					
																				km/h	50	2340	2720	3105	3485	3870	4250				
																					40	2340	2720	3105	3485	3870	4250				
																					30	2505	2915	3325	3735	4145	4550				
											10 LT	3135	3645	4160	4670	5185	5695														
											10 HT	2505	2915	3325	3735	4145	4550														

STD: Standard



MAIN APPLICATION:
TRACTOR



AGRIMAX RT 855 (R-1W)

RADIAL TRACTOR TIRES

AGRIMAX RT 855 is a tire featuring excellent traction and comfort properties. It has been designed mainly for soil tillage and field and road transport, but some sizes are also suitable for row crop, spraying and vineyard harvesting. AGRIMAX RT 855 has excellent self-cleaning features that allow for a quick change from field operations to road usage.



TRACTION SELF-CLEANING DURABILITY COMFORT

SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)														
		Rec.	Alt.							↓														
46" 520/85 R 46 (20.8 R 46)	173 A8/B	DW 16 L; W 16 A; W 16 L; DD 16	DW 18 L; W 18 L; W 18 A	516	2052	949	6252	975	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6	2.4	2.8	3.2	3.6	4.0			
										km/h	2340	2720	3105	3485	3870	4250	4875	5330	5785	6175	6500			
										50	2340	2720	3105	3485	3870	4250	4875	5330	5785	6175	6500			
										40	2505	2915	3325	3735	4145	4550	5215	5705	6190	6605	6955			
										30	3135	3645	4160	4670	5185	5695	6535	7140	7750	8275	8710			
										10 HT	2505	2915	3325	3735	4145	4550	5215	5705	6190	6605	6955			
50" 480/80 R 50 (18.4 R 50)	159 A8/B	DW 16 A	DW 15 A; W 15 A	479	2036	941	6158	975	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4						
										km/h	2060	2365	2715	3065	3415	3765	4070	4375						
										50	2060	2365	2715	3065	3415	3765	4070	4375						
										40	2205	2530	2905	3280	3655	4030	4360	4685						
										30	2760	3170	3640	4110	4575	5045	5455	5865						
										10 HT	2205	2530	2905	3280	3655	4030	4360	4685						
480/80 R 50 (18.4 R 50)	176 A8	DW 15 A	W 15 A; DW 16 A	479	2036	945	6228	975	SB	bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4	2.8	3.2	3.6	4.0	4.4	5.0
										km/h	2060	2365	2715	3065	3415	3765	4070	4375	4760	5185	5470	5825	6320	7100
										50	2060	2365	2715	3065	3415	3765	4070	4375	4760	5185	5470	5825	6320	7100
										40	2205	2530	2905	3280	3655	4030	4360	4685	5095	5550	5855	6235	6765	7600
										30	2760	3170	3640	4110	4575	5045	5455	5865	6380	6950	7330	7805	8470	9515
										10 HT	2205	2530	2905	3280	3655	4030	4360	4685	5095	5550	5855	6235	6765	7600

STD: Standard
SB: Steel Belted



MAIN APPLICATION:
TRACTOR



AGRIMAX SPARGO (R-1)

RADIAL 'VF' SPRAYER TIRES

AGRIMAX SPARGO is the special BKT tire for row crop applications. It has been designed for enhanced productivity in the fields and preserving the soil in the long term. The tire provides excellent self-cleaning features in addition to higher load capacity at standard pressure. AGRIMAX SPARGO ensures an outstanding traction along with strong stability both in the fields and during road transfers.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)										
		Rec.	Alt.																	
38" VF 380/85 R 38	161 D	W 13	W 12	380	1602	730	4830	775	STD	bar										
										km/h										
										0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4	2.8	3.2	
										From 10 to 65	1805	2130	2455	2730	3055	3330	3610	3935	4305	4625
46" VF 380/90 R 46	173 D	DW 13 A	W 13 A; DW 12	390	1852	846	5611	875	STD	bar										
										km/h										
										2.2	2.4	2.6	2.9	3.2	3.6	4.0	4.3	4.4		
										From 10 to 65	4355	4615	4810	5135	5460	5785	5980	6370	6500	

STD: Standard



MAIN APPLICATION:
TRACTOR



AGRIMAX RT 945 (R-1W)

RADIAL TRACTOR TIRES

AGRIMAX RT 945 is specially designed for row crops: it does not damage the crops and preserves the yield. Excellent self-cleaning features allow for a quick change from field operations to road usage, where AGRIMAX RT 945 shows brilliant performance. It is suitable for compact utility tractors in municipality and maintenance applications.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)											
		Rec.	Alt.							↓											
42" 320/90 R 42 (12.4 R 42)	139 A8/B	W 10	W 9; W 11	319	1643	760	4944	800	STD	bar											
										km/h											
										0.8	1.2	1.6	2.0	2.4	2.8						
										50	1315	1705	2090	2260	2430	-					
										40	1315	1705	2090	2260	2430	-					
30	1410	1825	2245	2425	2605	-															
10	1935	2370	2880	3355	3540	3645															
46" 320/90 R 46 (12.4 R 46)	146 A8/B	W 10	W 9; W 11	319	1744	810	5232	825	STD	bar											
										km/h											
										0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6				
										50	1380	1770	2160	2370	2550	2790	3000	-			
										40	1380	1770	2160	2370	2550	2790	3000	-			
30	1480	1895	2315	2540	2730	2990	3210	-													
10	1620	2115	2565	3060	3510	3645	4050	4500													
380/90 R 46 (14.9 R 46)	155 A8/B	W 12	W 11; W 13	380	1852	859	5596	875	STD	bar											
										km/h											
										0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6				
										50	1785	2290	2790	3065	3295	3605	3875	-			
										40	1785	2290	2790	3065	3295	3605	3875	-			
30	1910	2450	2990	3280	3530	3860	4150	-													
10	2095	2735	3315	3955	4540	4715	5235	5815													
380/90 R 46 (14.9 R 46)	159 A8/B	W 12	W 11; W 13	380	1852	859	5596	875	STD	bar											
										km/h											
										0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	4.4		
										50	1785	2290	2790	3065	3295	3605	3875	4070	4375	-	
										40	1785	2290	2790	3065	3295	3605	3875	4070	4375	-	
30	1910	2450	2990	3280	3530	3860	4150	4360	4685	-											
10	2095	2735	3315	3955	4540	4715	5235	5815	6040	6565											
50" 320/90 R 50 (12.4 R 50)	150 A8/B	W 10	W 9; W 11	319	1846	873	5618	875	STD	bar											
										km/h											
										0.8	1.2	1.6	2.0	2.4	2.8						
										50	1410	1845	2245	2450	2615	2850	3085	3350	-		
										40	1410	1845	2245	2450	2615	2850	3085	3350	-		
30	1510	1975	2405	2620	2800	3050	3300	3585	-												
10	1960	2565	3120	3420	3620	3970	4325	4675	5025												
380/90 R 50 (14.9 R 50)	151 A8/B	W 12	W 11; W 13	380	1954	913	5902	975	STD	bar											
										km/h											
										0.8	1.2	1.6	2.0	2.4	2.8						
										50	1865	2415	2970	3210	3450	-					
										40	1865	2415	2970	3210	3450	-					
30	2000	2590	3180	3440	3695	-															
10	2745	3365	4090	4765	5020	5175															

STD: Standard

Tolerances: O.D. ± 2% - S.W. ± 2% - RC ± 2.5%



MAIN APPLICATION:
TRACTOR



AGRIMAX RT 945 (R-1W)

RADIAL TRACTOR TIRES

AGRIMAX RT 945 is specially designed for row crops: it does not damage the crops and preserves the yield. Excellent self-cleaning features allow for a quick change from field operations to road usage, where AGRIMAX RT 945 shows brilliant performance. It is suitable for compact utility tractors in municipality and maintenance applications.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)										
		Rec.	Alt.							↓										
											bar	0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0
54" 320/90 R 54 (12.4 R 54)	155 A8/B	W 10	W 9; W 11	319	1948	930	5987	925	STD	km/h	50	1670	2170	2635	2870	3065	3375	3645	3875	-
										40	1670	2170	2635	2870	3065	3375	3645	3875	-	
										30	1785	2325	2825	3075	3280	3615	3905	4150	-	
										10	2385	3085	3725	4075	4365	4770	5180	5525	5815	
										bar	0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	
380/90 R 54 (14.9 R 54)	158 A8/B	W 12	W 11; W 13	380	2056	962	6296	1025	STD	km/h	50	1955	2510	3060	3315	3615	3955	4250	-	
										40	1955	2510	3060	3315	3615	3955	4250	-		
										30	2095	2685	3280	3550	3870	4235	4550	-		
										10	2295	3000	3635	4335	4975	5165	5740	6375		
										bar	0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	

STD: Standard



MAIN APPLICATION:
TRACTOR



AGRIMAX RT 955 (R-1)

RADIAL TRACTOR TIRES

AGRIMAX RT 955 is a BKT radial tire for row crop applications, while some sizes are also suitable for spraying. The special tread design with a rounded shoulder provides excellent traction performance and continuous contact on the land in order to protect both valuable crops and soil from damage.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)																							
		Rec.	Alt.							↓																							
											bar		0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4	2.8												
											km/h																						
24"	210/90 R 24 (8.3 R 24)	107 A8/B	W 7	W 6	214	1010	462	3027	500	STD	bar		0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4	2.8												
											km/h																						
											50		460	530	605	685	765	840	910	975	-												
											40		460	530	605	685	765	840	910	975	-												
											30		495	565	650	735	820	900	975	1045	-												
10		675	780	865	955	1055	1160	1350	1425	1465																							
28"	210/95 R 28 (8.3 R 28)	116 A8/B	W 7	W 6	214	1111	513	3333	550	STD	bar		0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4	2.8												
											km/h																						
											50		590	675	775	875	975	1075	1165	1250	-												
											40		590	675	775	875	975	1075	1165	1250	-												
											30		630	725	835	940	1050	1155	1250	1340	-												
10		865	995	1110	1220	1350	1485	1725	1820	1875																							
32"	210/95 R 32 (8.3 R 32)	120 A8/B	W 7	W 6	214	1213	571	3703	575	STD	bar		0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6													
											km/h																						
											50		645	830	1010	1095	1190	1305	1400	-													
											40		645	830	1010	1095	1190	1305	1400	-													
											30		690	885	1080	1170	1275	1395	1500	-													
10		905	1180	1430	1555	1660	1830	1975	2100																								
32"	230/95 R 32 (9.5 R 32)	128 A8/B	W 8	W 7	238	1251	585	3792	600	STD	bar		0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	4.4											
											km/h																						
											50		705	920	1120	1225	1300	1425	1550	1675	1800	-											
											40		705	920	1120	1225	1300	1425	1550	1675	1800	-											
											30		755	985	1200	1315	1390	1525	1660	1795	1930	-											
10		840	1055	1300	1540	1785	1840	2055	2270	2485	2700																						
32"	270/95 R 32 (11.2 R 32)	136 A8/B	W 9	W 8; W 10	275	1327	614	4044	625	STD	bar		0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	4.4											
											km/h																						
											50		875	1145	1390	1525	1615	1770	1930	2085	2240	-											
											40		875	1145	1390	1525	1615	1770	1930	2085	2240	-											
											30		940	1225	1490	1635	1730	1900	2065	2235	2400	-											
10		1045	1315	1615	1920	2220	2285	2555	2825	3095	3360																						
36"	230/95 R 36 (9.5 R 36)	130 A8/B	W 8	W 7	238	1352	639	4112	650	STD	bar		0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	4.4											
											km/h																						
											50		745	970	1180	1295	1370	1505	1635	1770	1900	-											
											40		745	970	1180	1295	1370	1505	1635	1770	1900	-											
											30		795	1040	1265	1385	1470	1610	1755	1895	2035	-											
10		885	1115	1370	1625	1885	1940	2170	2395	2625	2850																						
36"	270/95 R 36 (11.2 R 36)	139 A8/B	W 9	W 8; W 10	275	1428	665	4368	675	STD	bar		0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	4.4											
											km/h																						
											50		950	1240	1510	1655	1750	1920	2090	2260	2430	-											
											40		950	1240	1510	1655	1750	1920	2090	2260	2430	-											
											30		1020	1330	1620	1775	1880	2060	2245	2425	2605	-											
10		1130	1425	1750	2080	2410	2480	2775	3065	3355	3645																						

STD: Standard

Tolerances: O.D. ± 2% - S.W. ± 2% - RC ± 2.5%



MAIN APPLICATION:
TRACTOR



AGRIMAX RT 955 (R-1)

RADIAL TRACTOR TIRES

AGRIMAX RT 955 is a BKT radial tire for row crop applications, while some sizes are also suitable for spraying. The special tread design with a rounded shoulder provides excellent traction performance and continuous contact on the land in order to protect both valuable crops and soil from damage.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)												
		Rec.	Alt.																			
38"	270/95 R 38 (11.2 R 38)	140 A8/B	W 9	W 8; W 10	275	1479	697	4510	700	STD	bar											
											km/h											
											0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	4.4		
											50	975	1275	1550	1700	1800	1975	2150	2325	2500	-	
											40	975	1275	1550	1700	1800	1975	2150	2325	2500	-	
											30	1045	1365	1660	1820	1930	2115	2305	2490	2675	-	
10	1165	1465	1800	2140	2475	2550	2850	3150	3450	3750												
42"	230/95 R 42 (9.5 R 42)	133 A8/B	W 8	W 7	238	1506	714	4633	725	STD	bar											
											km/h											
											0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	4.4		
											50	805	1055	1280	1405	1485	1630	1775	1920	2060	-	
											40	805	1055	1280	1405	1485	1630	1775	1920	2060	-	
											30	860	1125	1370	1500	1590	1745	1900	2055	2205	-	
10	960	1210	1485	1765	2040	2105	2350	2600	2845	3090												
42"	300/85 R 42 (11.2 R 42)	144 A8/B	W 9	W 10; W 11	295	1577	745	4850	750	STD	bar											
											km/h											
											0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	4.4		
											50	1150	1485	1795	1960	2100	2300	2495	2660	2800	-	
											40	1150	1485	1795	1960	2100	2300	2495	2660	2800	-	
											30	1230	1590	1920	2100	2250	2460	2670	2850	3000	-	
10	1305	1640	2020	2395	2775	2860	3195	3530	3865	4200												
44"	210/95 R 44 (8.3 R 44)	120 A8/B	W 7	W 6	214	1518	716	4554	725	STD	bar											
											km/h											
											0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4	2.8			
											50	660	760	870	980	1095	1205	1305	1400	-		
											40	660	760	870	980	1095	1205	1305	1400	-		
											30	705	810	930	1050	1170	1290	1395	1500	-		
10	970	1115	1240	1365	1515	1660	1935	2040	2100													
44"	230/95 R 44 (9.5 R 44)	134 A8/B	W 8	W 7	238	1556	739	4788	750	STD	bar											
											km/h											
											0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	4.4		
											50	830	1085	1315	1445	1530	1675	1825	1975	2120	-	
											40	830	1085	1315	1445	1530	1675	1825	1975	2120	-	
											30	890	1160	1410	1545	1635	1795	1955	2115	2270	-	
10	990	1245	1530	1815	2100	2165	2420	2675	2930	3180												
44"	270/95 R 44 (11.2 R 44)	142 A8/B	W 9	W 8 ; W 10	275	1632	764	4983	775	STD	bar											
											km/h											
											0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	4.4		
											50	1035	1355	1645	1805	1910	2095	2280	2465	2650	-	
											40	1035	1355	1645	1805	1910	2095	2280	2465	2650	-	
											30	1110	1450	1765	1935	2045	2245	2445	2645	2840	-	
10	1235	1555	1910	2270	2625	2705	3025	3340	3660	3975												

STD: Standard



MAIN APPLICATION:
TRACTOR



AGRIMAX RT 955 (R-1)

RADIAL TRACTOR TIRES

AGRIMAX RT 955 is a BKT radial tire for row crop applications, while some sizes are also suitable for spraying. The special tread design with a rounded shoulder provides excellent traction performance and continuous contact on the land in order to protect both valuable crops and soil from damage.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)																					
		Rec.	Alt.							↓																					
46" 270/95 R 46 (11.2 R 46)	143 A8/B	W 9	W 8; W 10	275	1683	786	5049	800	STD	bar	0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	4.4											
										km/h																					
										50	1120	1445	1745	1910	2045	2235	2430	2590	2725	-											
										40	1120	1445	1745	1910	2045	2235	2430	2590	2725	-											
										30	1200	1550	1870	2045	2190	2395	2600	2775	2920	-											
10	1545	2000	2410	2640	2825	3090	3355	3580	3765	4090																					
300/95 R 46 (12.4 R 46)	148 A8/B	W 9	W 10; W 11; DW 10; DW 11	295	1738	812	5318	825	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4	2.8	3.2	3.6	4.0	4.4								
										km/h																					
										50	1105	1295	1485	1670	1860	2020	2205	2365	2585	2805	2995	3150	-								
										40	1105	1295	1485	1670	1860	2020	2205	2365	2585	2805	2995	3150	-								
										30	1185	1385	1590	1790	1995	2160	2365	2535	2770	3005	3210	3375	-								
20	1360	1590	1825	2055	2290	2480	2715	2910	3180	3450	3685	3875	-																		
10	1525	1785	2045	2310	2570	2785	3045	3265	3570	3875	4135	4350	4725																		
300/95 R 46 (12.4 R 46)	148 A8/B	W 9	W 10; W 11; DW 10; DW 11	295	1738	812	5318	825	SPL	bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4	2.8	3.2	3.6	4.0	4.4								
										km/h																					
										50	1105	1295	1485	1670	1860	2020	2205	2365	2585	2805	2995	3150	-								
										40	1105	1295	1485	1670	1860	2020	2205	2365	2585	2805	2995	3150	-								
										30	1185	1385	1590	1790	1995	2160	2365	2535	2770	3005	3210	3375	-								
20	1360	1590	1825	2055	2290	2480	2715	2910	3180	3450	3685	3875	-																		
10	1525	1785	2045	2310	2570	2785	3045	3265	3570	3875	4135	4350	4725																		
340/85 R 46 (13.6 R 46)	150 A8/B	W 12	W 11	353	1746	811	5238	825	STD	bar	0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0												
										km/h																					
										50	1445	1880	2280	2480	2650	2915	3150	3350	-												
										40	1445	1880	2280	2480	2650	2915	3150	3350	-												
										30	1545	2010	2440	2655	2835	3120	3370	3585	-												
10	2065	2665	3220	3520	3770	4125	4475	4775	5025																						
48" 230/95 R 48 (9.5 R 48)	136 A8/B	W 8	W 7	238	1656	792	5085	800	STD	bar	0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	4.4											
										km/h																					
										50	875	1145	1390	1525	1615	1770	1930	2085	2240	-											
										40	875	1145	1390	1525	1615	1770	1930	2085	2240	-											
										30	940	1225	1490	1635	1730	1900	2065	2235	2400	-											
10	1045	1315	1615	1920	2220	2285	2555	2825	3095	3360																					

STD: Standard
SPL: Special Version



MAIN APPLICATION:
TRACTOR



AGRIMAX RT 955 (R-1)

RADIAL TRACTOR TIRES

AGRIMAX RT 955 is a BKT radial tire for row crop applications, while some sizes are also suitable for spraying. The special tread design with a rounded shoulder provides excellent traction performance and continuous contact on the land in order to protect both valuable crops and soil from damage.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)											
		Rec.	Alt.							↓											
48"	270/95 R 48 (11.2 R 48)	144 A8/B	W 9	W 8; W 10	275	1733	820	5351	825	STD	bar										
											km/h										
											0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	4.4	
											50	1095	1430	1740	1905	2020	2215	2410	2605	2800	-
											40	1095	1430	1740	1905	2020	2215	2410	2605	2800	-
30	1170	1530	1860	2040	2160	2370	2580	2790	3000	-											
10	1305	1640	2020	2395	2775	2860	3195	3530	3865	4200											
52"	340/85 R 48 (13.6 R 48)	152 A8/B	W 12	W 11	353	1797	855	5572	875	STD	bar										
											km/h										
											0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	4.4	
											50	1385	1815	2205	2415	2560	2805	3055	3305	3550	-
											40	1385	1815	2205	2415	2560	2805	3055	3305	3550	-
30	1485	1940	2360	2585	2740	3005	3270	3535	3800	-											
10	1655	2080	2560	3040	3515	3625	4050	4475	4900	5325											
54"	300/95 R 52 (12.4 R 52)	151 A8/B	W 9	W 10; W 11; DW 10; DW 11	295	1891	889	5822	925	STD	bar										
											km/h										
											0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	4.4	
											50	1350	1760	2140	2350	2485	2730	2970	3210	3450	-
											40	1350	1760	2140	2350	2485	2730	2970	3210	3450	-
30	1445	1885	2295	2515	2665	2920	3180	3440	3695	-											
10	1605	2020	2485	2950	3420	3520	3935	4350	4765	5175											
54"	270/95 R 54 (11.2 R 54)	146 A8/B	W 9	W 8; W 10	275	1885	878	5815	925	STD	bar										
											km/h										
											0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	4.4	
											50	1170	1530	1860	2040	2160	2370	2580	2790	3000	-
											40	1170	1530	1860	2040	2160	2370	2580	2790	3000	-
30	1255	1640	1995	2185	2315	2540	2765	2990	3210	-											
10	1395	1755	2160	2565	2970	3060	3420	3780	4140	4500											

STD: Standard



MAIN APPLICATION:
TRACTOR



AGRIMAX ELOS (R-2)

RADIAL MARSHLAND TIRES

AGRIMAX ELOS has been designed to enhance top traction performance even under particularly awkward operating conditions on wet terrains such as paddy fields or marshland. The tread design has been especially developed to ensure optimum self-cleaning properties, which are essential for operations on muddy land and during transfers. To optimize the farmers' productivity reducing machine downtime, sidewall protectors have been integrated into the design of the AGRIMAX ELOS tire to ensure maximum protection against possible damages at any time.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)						
		Rec.	Alt.							↓						
28" 420/85 R 28 (16.9 R 28)	139 A8/B	W 15 L	W 13; W 14 L	438	1467	665	4349	700	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6
										km/h						
										50	1340	1560	1775	1995	2215	2430
										40	1340	1560	1775	1995	2215	2430
										30	1435	1670	1905	2140	2375	2605
										10 LT	1795	2090	2380	2675	2970	3260
										10 HT	1435	1670	1905	2140	2375	2605
38" 340/85 R 38 (13.6 R 38)	133 A8/B	W 12	W 11	353	1602	735	4774	775	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6
										km/h						
										50	1135	1320	1505	1690	1875	2060
										40	1135	1320	1505	1690	1875	2060
										30	1215	1415	1610	1810	2010	2205
										10 LT	1525	1770	2020	2270	2520	2765
										10 HT	1215	1415	1610	1810	2010	2205
380/85 R 38 (14.9 R 38)	139 A8/B	W 12	W 11; W 13	380	1662	772	4994	775	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6
										km/h						
										50	1340	1560	1775	1995	2215	2430
										40	1340	1560	1775	1995	2215	2430
										30	1435	1670	1905	2140	2375	2605
										10 LT	1795	2090	2380	2675	2970	3260
										10 HT	1435	1670	1905	2140	2375	2605
420/85 R 38 (16.9 R 38)	144 A8/B	W 15 L	W 13; W 14 L	438	1735	784	5056	825	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6
										km/h						
										50	1540	1795	2045	2300	2550	2800
										40	1540	1795	2045	2300	2550	2800
										30	1650	1920	2190	2460	2730	3000
										10 LT	2070	2405	2745	3080	3420	3755
										10 HT	1650	1920	2190	2460	2730	3000

STD: Standard



MAIN APPLICATION:
TRACTOR



AGRIMAX ELOS (R-2)

RADIAL MARSHLAND TIRES

AGRIMAX ELOS has been designed to enhance top traction performance even under particularly awkward operating conditions on wet terrains such as paddy fields or marshland. The tread design has been especially developed to ensure optimum self-cleaning properties, which are essential for operations on muddy land and during transfers. To optimize the farmers' productivity reducing machine downtime, sidewall protectors have been integrated into the design of the AGRIMAX ELOS tire to ensure maximum protection against possible damages at any time.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)							
		Rec.	Alt.							↓							
42" 480/80 R 42 (18.4 R 42)	151 A8/B	DW 16 L	DD 16 L; W 16 L	489	1890	857	5600	875	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6	
										km/h	50	1900	2210	2520	2830	3140	3450
										40	1900	2210	2520	2830	3140	3450	
										30	2035	2365	2700	3030	3365	3695	
										10 LT	2545	2960	3380	3795	4210	4625	
										10 HT	2035	2365	2700	3030	3365	3695	
										bar	0.6	0.8	1.0	1.2	1.4	1.6	
km/h	50	2270	2640	3015	3385	3755	4125										
40	2270	2640	3015	3385	3755	4125											
30	2430	2830	3225	3625	4020	4415											
10 LT	3045	3540	4040	4535	5035	5530											
10 HT	2430	2830	3225	3625	4020	4415											

STD: Standard



MAIN APPLICATION:
TRACTOR



RT 853 (R-1)

RT 853 is an entry level R1 tire for tractors and vineyard harvesters in soil tillage and vineyard harvesting applications.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)											
		Rec.	Alt.							↓											
											bar	0.6	0.8	1.0	1.2	1.4	1.6				
38" 480/80 R 38 (18.4 R 38)	149 A8/B	W 16 L	W 15 L; W 14 L	475	1747	781	5256	825	STD	km/h	50	40	30	10 LT	10 HT	1790	2080	2375	2665	2960	3250
										50	1790	2080	2375	2665	2960	3250	3250				
										40	1790	2080	2375	2665	2960	3250	3250				
										30	1915	2230	2545	2855	3170	3480					
										10 LT	2400	2790	3180	3575	3965	4355					
										10 HT	1915	2230	2545	2855	3170	3480					
520/85 R 38 (20.8 R 38)	155 A8/B	DW 16 L	DW 18 L; DD 16 L	516	1849	830	5592	875	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6					
										km/h	50	40	30	10 LT	10 HT	2135	2480	2830	3180	3530	3875
										50	2135	2480	2830	3180	3530	3875	3875				
										40	2135	2480	2830	3180	3530	3875	3875				
										30	2285	2660	3030	3405	3780	4150					
										10 LT	2860	3325	3795	4260	4730	5195					
10 HT	2285	2660	3030	3405	3780	4150															

STD: Standard



MAIN APPLICATION:
TRACTOR



RT 857 (R-1)

RT 857 is a road-oriented tire for haulage operations as well as for soil tillage and vineyard harvesting applications. Its strong casing along with polyester belts offers excellent driving comfort and puncture resistance. Its stubble-resistant tread compound features high cut and chip resistance.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)								
		Rec.	Alt.							↓								
26"	420/85 R 26 (16.9 R 26)	135 A8/B	DW 15 L	W 15 L; W 16 L; DW 16 L	438	1374	616	4115	650	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6	
											km/h	50	1200	1400	1595	1790	1985	2180
											40	1200	1400	1595	1790	1985	2180	
											30	1285	1495	1705	1915	2125	2335	
											10 LT	1610	1875	2140	2400	2665	2925	
											10 HT	1285	1495	1705	1915	2125	2335	
											bar	0.6	0.8	1.0	1.2	1.4	1.6	
											km/h	50	1500	1745	1990	2235	2480	2725
											40	1500	1745	1990	2235	2480	2725	
											30	1610	1870	2135	2395	2660	2920	
10LT	2015	2340	2670	3000	3330	3655												
10HT	1610	1870	2135	2395	2660	2920												
28"	320/85 R 28 (12.4 R 28)	124 A8/B	W 11	W 9; W 10	329	1255	577	3779	600	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6	
											km/h	50	880	1025	1170	1315	1460	1600
											40	880	1025	1170	1315	1460	1600	
											30	945	1100	1255	1410	1565	1715	
											10 LT	1180	1375	1570	1760	1955	2145	
											10 HT	945	1100	1255	1410	1565	1715	
											bar	0.6	0.8	1.0	1.2	1.4	1.6	
											km/h	50	965	1120	1280	1435	1595	1750
											40	965	1120	1280	1435	1595	1750	
											30	1035	1200	1370	1540	1710	1875	
10 LT	1290	1505	1715	1925	2135	2345												
10 HT	1035	1200	1370	1540	1710	1875												
	340/85 R 28 (13.6 R 28)	127 A8/B	W 12	W 11	353	1289	599	3908	625	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6	
											km/h	50	1135	1320	1505	1690	1875	2060
											40	1135	1320	1505	1690	1875	2060	
											30	1215	1415	1610	1810	2010	2205	
											10 LT	1525	1770	2020	2270	2520	2765	
											10 HT	1215	1415	1610	1810	2010	2205	

STD: Standard



MAIN APPLICATION:
TRACTOR



RT 857 (R-1)

RT 857 is a road-oriented tire for haulage operations as well as for soil tillage and vineyard harvesting applications. Its strong casing along with polyester belts offers excellent driving comfort and puncture resistance. Its stubble-resistant tread compound features high cut and chip resistance.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)							
		Rec.	Alt.							↓							
28"	420/85 R 28 (16.9 R 28)	139 A8/B	W 15 L	W 14 L; W 13	450	1425	640	4276	675	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6
											km/h						
											50	1340	1560	1775	1995	2215	2430
											40	1340	1560	1775	1995	2215	2430
											30	1435	1670	1905	2140	2375	2605
											10 LT	1795	2090	2380	2675	2970	3260
											10 HT	1435	1670	1905	2140	2375	2605
30"	420/85 R 30 (16.9 R 30)	140 A8/B	W 15 L	W 14 L; W 13	438	1476	656	4398	700	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6
											km/h						
											50	1375	1600	1825	2050	2275	2500
											40	1375	1600	1825	2050	2275	2500
											30	1475	1715	1955	2195	2435	2675
											10LT	1845	2145	2450	2750	3050	3350
											10HT	1475	1715	1955	2195	2435	2675
	460/85 R 30 (18.4 R 30)	145 A8/B	W 16 L	W 15 L; W 14 L	475	1544	682	4601	725	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6
											km/h						
											50	1595	1860	2120	2380	2640	2900
											40	1595	1860	2120	2380	2640	2900
											30	1710	1990	2270	2550	2830	3105
											10LT	2140	2490	2840	3190	3540	3890
											10HT	1710	1990	2270	2550	2830	3105

STD: Standard



MAIN APPLICATION:
TRACTOR



RIDEMAX IT 696

RADIAL TRANSPORT TIRES

RIDEMAX IT 696 has a unique tread design that provides excellent grip for road applications, even in winter conditions. It is best suitable for transport and municipality/maintenance applications also thanks to its high-speed feature. The tread design has been specially developed to ensure excellent self-cleaning properties and a low rolling resistance.



ROAD ORIENTED

DURABILITY

HIGH SPEED

SELF-CLEANING

ALL SEASON

TRACTION

FUEL ECONOMY

HEAVY DUTY SERVICE

SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)								
		Rec.	Alt.							↓								
24"	300/80 R 24 (11.2 R 24)	133 A8/128 D	DW 10	-	295	1090	501	3296	525	STD	bar	1.2	1.6	2.0	2.4	2.8	3.2	
											km/h	65	845	1045	1225	1420	1600	1800
											50	910	1125	1320	1535	1725	1940	
											40	970	1195	1400	1625	1835	2060	
											30	1010	1245	1460	1700	1915	2150	
											bar	1.2	1.6	2.0	2.4	2.8	3.2	
24"	340/80 R 24 (12.4 R 24)	140 A8/135 D	DW 11	W 10; W 12; DW 10	343	1154	521	3444	550	STD	bar	1.2	1.6	2.0	2.4	2.8	3.2	
											km/h	65	1025	1265	1480	1720	1940	2180
											50	1105	1365	1600	1855	2090	2350	
											40	1175	1450	1700	1975	2225	2500	
											30	1220	1510	1770	2055	2315	2600	
											bar	1.2	1.6	2.0	2.4	2.8	3.2	
24"	400/80 R 24 (14.9 R 24)	149 A8/144 D	DW 13	W 12; W 14 L	404	1250	558	3760	600	STD	bar	1.2	1.6	2.0	2.4	2.8	3.2	
											km/h	65	1315	1625	1905	2210	2490	2800
											50	1440	1775	2080	2415	2725	3060	
											40	1530	1885	2210	2570	2895	3250	
											30	1590	1960	2300	2670	3010	3380	
											bar	1.2	1.6	2.0	2.4	2.8	3.2	
28"	400/80 R 28 (14.9 R 28)	151 A8/146 D	W 13	W 12; W 14 L	404	1352	615	4048	650	STD	bar	1.2	1.6	2.0	2.4	2.8	3.2	
											km/h	65	1410	1740	2040	2370	2670	3000
											50	1530	1890	2215	2575	2900	3260	
											40	1620	2000	2345	2725	3070	3450	
											30	1690	2090	2450	2845	3205	3600	
											bar	1.2	1.6	2.0	2.4	2.8	3.2	
28"	440/80 R 28 (16.9 R 28)	156 A8/151 D	W 14 L	W 15 L	441	1415	634	4248	675	STD	bar	1.2	1.6	2.0	2.4	2.8	3.2	
											km/h	65	1620	2000	2345	2725	3070	3450
											50	1765	2180	2555	2970	3345	3760	
											40	1880	2320	2720	3160	3560	4000	
											30	1955	2415	2830	3285	3700	4160	
											bar	1.2	1.6	2.0	2.4	2.8	3.2	

STD: Standard



MAIN APPLICATION:
TRACTOR



RIDEMAX IT 696

RADIAL TRANSPORT TIRES

RIDEMAX IT 696 has a unique tread design that provides excellent grip for road applications, even in winter conditions. It is best suitable for transport and municipality/maintenance applications also thanks to its high-speed feature. The tread design has been specially developed to ensure excellent self-cleaning properties and a low rolling resistance.



ROAD ORIENTED

DURABILITY

HIGH SPEED

SELF-CLEANING

ALL SEASON

TRACTION

FUEL ECONOMY

HEAVY DUTY SERVICE

SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)								
		Rec.	Alt.							↓								
											bar	1.2	1.6	2.0	2.4	2.8	3.2	
											km/h							
30"	440/80 R 30 (16.9 R 30)	157 A8/153 D	W 14 L	W 15 L	441	1466	668	4456	700	STD	bar	1.2	1.6	2.0	2.4	2.8	3.2	
											km/h	65	1715	2115	2480	2885	3250	3650
											50	1825	2250	2640	3065	3455	3880	
											40	1940	2395	2805	3260	3670	4125	
											30	2020	2495	2925	3395	3825	4300	
30"	480/80 R 30 (18.4 R 30)	162 A8/157 D	W 15 L	W 16 L	479	1530	673	4558	725	STD	bar	1.2	1.6	2.0	2.4	2.8	3.2	
											km/h	65	1940	2395	2805	3260	3670	4125
											50	2105	2600	3045	3540	3985	4480	
											40	2235	2755	3230	3755	4230	4750	
											30	2320	2865	3360	3905	4395	4940	
34"	440/80 R 34 (16.9 R 34)	159 A8/155 D	W 14 L	W 15 L	441	1567	704	4714	750	STD	bar	1.2	1.6	2.0	2.4	2.8	3.2	
											km/h	65	1820	2250	2635	3060	3450	3875
											50	1935	2390	2800	3255	3665	4120	
											40	2055	2540	2975	3455	3895	4375	
											30	2145	2645	3100	3600	4060	4560	
34"	480/80 R 34 (18.4 R 34)	164 A8/159 D	W 15 L	W 16 L	479	1632	728	4894	775	STD	bar	1.2	1.6	2.0	2.4	2.8	3.2	
											km/h	65	2055	2540	2975	3455	3895	4375
											50	2210	2725	3195	3715	4185	4700	
											40	2350	2900	3400	3950	4450	5000	
											30	2445	3015	3535	4110	4630	5200	
38"	480/80 R 38 (18.4 R 38)	166 A8/161 D	W 15 L	W 16 L	479	1733	780	5213	825	STD	bar	1.2	1.6	2.0	2.4	2.8	3.2	
											km/h	65	2175	2685	3145	3655	4115	4625
											50	2350	2900	3400	3950	4450	5000	
											40	2490	3075	3605	4185	4715	5300	
											30	2595	3200	3755	4360	4915	5520	

STD: Standard



MAIN APPLICATION:
TRACTOR



TR 126 (R-1)

TR 126 is designed to fit small tractors in soil tillage operations and is particularly suitable on muddy ground. The deep lugs and the tread pattern provide excellent traction and outstanding self-cleaning features providing best tire performance in all operating conditions.



TRACTION



SUITABLE FOR MUDDY GROUND



SELF-CLEANING

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 30 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
14" 6 - 14	5 JA ; 5 KB	-	157	655	305	1965	STD	4	TT	66 A6	1.90	300
7 - 14	5 JA ; 5 KB	-	170	690	320	2070	STD	4	TT	72 A6	1.60	355

STD: Standard



TR 133 (R-1)

TR 133 has been specially designed for harvesters, tractors, sprayers and trailers in harvesting, soil tillage and spraying applications. It features excellent traction and outstanding comfort as well as enhanced self-cleaning properties. TR 133 provides an extended tire life-cycle.



TRACTION



DURABILITY



COMFORT



SELF-CLEANING

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 30 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
38" 13.6 - 38 (14.00 - 38)	W 12	W 11	350	1580	735	4843	STD	10	TT	-	2.50	2240

STD: Standard



MAIN APPLICATION:
TRACTOR



TR 135 (R-1)

TR 135 is best suitable for soil tillage and spraying applications. Some sizes and versions are also suitable for excavators, trailers and harvesters. Traction, self-cleaning properties and stability are key features which make the TR 135 tire the ideal partner even on the most difficult ground conditions.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 30 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
20" 8.00 - 20	5.50 F	-	225	965	448	2837	STD	6	TT	105 A6	2.10	925
8.00 - 20	5.50 F	-	225	965	448	2837	STD	8	TT	111 A6	2.80	1090
9.5 - 20	W 8	W 7	240	955	444	2808	STD	6	TT	102 A6	2.20	850
9.5 - 20	W 8	W 7	240	955	444	2808	STD	8	TT	107 A6	2.80	975
9.5 - 20	W 8	W 7	240	955	444	2808	HD	8	TT	107 A6	2.80	975
10.00 - 20	7.5	-	280	1075	495	3160	STD	10	TT	152 A2	4.80	3550
11.2 - 20	W 10	W 9; 9	292	1020	477	3000	STD	8	TT	111 A6	2.40	1090
12.4 - 20	W 11	W 9; 9; W 10; 11	325	1075	500	3160	STD	8	TT	116 A6	2.10	1250
24" 8.3 - 24	W 7	W 6	211	995	469	2925	STD	6	TT	100 A6	2.40	800
8.3 - 24	W 7	W 6	211	995	469	2925	STD	8	TT	105 A6	3.10	925
8.3 - 24	W 7	W 6	211	995	469	2925	HD	8	TT	105 A6	3.10	925
9.5 - 24	W 8	W 7	232	1056	494	3217	STD	6	TT	106 A6	2.10	950
9.5 - 24	W 8	W 7	232	1056	494	3217	STD	8	TT	112 A6	2.80	1120
9.5 - 24	W 8	W 7	232	1056	494	3217	HD	8	TT	112 A6	2.80	1120

STD: Standard
HD: Heavy Duty Version ①

Tolerances: O.D. ± 2% - S.W. ± 2% - RC ± 2.5%



MAIN APPLICATION:
TRACTOR



TR 135 (R-1)

TR 135 is best suitable for soil tillage and spraying applications. Some sizes and versions are also suitable for excavators, trailers and harvesters. Traction, self-cleaning properties and stability are key features which make the TR 135 tire the ideal partner even on the most difficult ground conditions.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 30 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
24" 9.5 - 24	W 8	W 7	232	1056	494	3217	STD	10	TT	116 A6	3.50	1250
9.5 - 24	W 8	W 7	232	1056	494	3217	HD	10	TT	116 A6	3.50	1250
11.2 - 24	W 10	W 9	284	1105	515	3249	STD	6	TT	110 A6	1.80	1060
11.2 - 24	W 10	W 9	284	1105	515	3249	STD	8	TT	116 A6	2.40	1250
11.2 - 24	W 10	W 9	284	1105	515	3249	HD	8	TT	116 A6	2.40	1250
11.2 - 24	W 10	W 9	284	1105	515	3249	HD	10	TT	120 A6	3.00	1400
12.4 - 24	W 11	W 9; W 10	315	1160	535	3524	STD	6	TT	115 A6	1.70	1215
12.4 - 24	W 11	W 9; W 10	315	1160	535	3524	STD	8	TT	121 A6	2.30	1450
12.4 - 24	W 11	W 9; W 10	315	1160	535	3524	STD	8	TL	121 A6	2.30	1450
12.4 - 24	W 11	W 9; W 10	315	1160	535	3524	HD	8	TT	121 A6	2.30	1450
12.4 - 24	W 11	W 9; W 10	315	1160	535	3524	HD	8	TL	121 A6	2.30	1450
12.4 - 24	W 11	W 9; W 10	315	1160	535	3524	STD	10	TT	125 A6	2.90	1650
12.4 - 24	W 11	W 9; W 10	315	1160	535	3524	STD	12	TT	128 A6	3.50	1800
12.4 - 24	W 11	W 9; W 10	315	1160	535	3524	SPL	12	TT	128 A6	3.50	1800
13.6 - 24	W 12	W 11	345	1210	560	3557	STD	8	TT	123 A6	2.00	1550

HD: Heavy Duty Version ①
SPL: Special Version ②
STD: Standard



MAIN APPLICATION:
TRACTOR



TR 135 (R-1)

TR 135 is best suitable for soil tillage and spraying applications. Some sizes and versions are also suitable for excavators, trailers and harvesters. Traction, self-cleaning properties and stability are key features which make the TR 135 tire the ideal partner even on the most difficult ground conditions.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 30 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
24" 13.6 - 24	W 12	W 11	345	1210	560	3557	HD	8	TT	123 A6	2.00	1550
13.6 - 24	W 12	W 11	345	1210	560	3557	STD	12	TT	130 A6	2.90	1900
14.9 - 24	W 13	W 12; W 11	378	1265	583	3719	STD	8	TT	128 A6	1.80	1800
14.9 - 24	W 13	W 12; W 11	378	1265	583	3719	STD	8	TL	128 A6	1.80	1800
14.9 - 24	W 13	W 11; W 12	378	1265	583	3719	HD	8	TT	128 A6	1.80	1800
14.9 - 24	W 13	W 11; W 12	378	1265	583	3719	HD	10	TL	132 A6	2.30	2000
14.9 - 24	W 13	W 12; W 11	378	1265	583	3719	STD	12	TT	135 A6	2.60	2180
14.9 - 24	W 13	W 12; W 11	378	1265	583	3719	STD	12	TL	135 A6	2.60	2180
16.9 - 24	W 15 L	W 14 L	429	1335	613	3925	STD	8	TT	133 A6	1.70	2060
16.9 - 24	W 15 L	W 14 L	429	1335	613	3925	HD	8	TT	133 A6	1.70	2060
16.9 - 24	W 15 L	W 14 L	429	1335	613	3925	STD	10	TT	136 A6	2.00	2240
16.9 - 24	W 15 L	W 14 L	429	1335	613	3925	HD	12	TT	140 A6	2.40	2500
26" 14.9 - 26	W 13	W 11; W 12	375	1315	608	3863	STD	8	TT	129 A6	1.80	1850
14.9 - 26	W 13	W 11; W 12	375	1315	608	3863	HD	8	TT	129 A6	1.80	1850
14.9 - 26	W 13	W 11; W 12	375	1315	608	3863	STD	12	TT	136 A6	2.70	2240

HD: Heavy Duty Version ①
STD: Standard

Tolerances: O.D. ± 2% - S.W. ± 2% - RC ± 2.5%



MAIN APPLICATION:
TRACTOR



TR 135 (R-1)

TR 135 is best suitable for soil tillage and spraying applications. Some sizes and versions are also suitable for excavators, trailers and harvesters. Traction, self-cleaning properties and stability are key features which make the TR 135 tire the ideal partner even on the most difficult ground conditions.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 30 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
26" 16.9 - 26	W 15 L	W 14 L	430	1380	636	4054	STD	10	TT	137 A6	2.00	2300
16.9 - 26	W 15 L	W 14 L	430	1380	636	4054	STD	12	TT	140 A6	2.30	2500
23.1 - 26	DW 20 B; DW 20 A	-	587	1585	700	4615	STD	12	TL	153 A6	1.70	3650
23.1 - 26	DW 20 B; DW 20 A	-	587	1585	700	4615	STD	12	TT	153 A6	1.70	3650
23.1 - 26	DW 20 B; DW 20 A	-	587	1585	700	4615	DB	12	TL	153 A6	1.70	3650
23.1 - 26	DW 20 B; DW 20 A	-	587	1585	700	4615	STD	14	TL	156 A6	2.00	4000
23.1 - 26	DW 20 B; DW 20 A	-	587	1585	700	4615	STD	16	TL	159 A6	2.30	4375
23.1 - 26	DW 20 B; DW 20 A	-	587	1585	700	4615	STD	16	TT	159 A6	2.30	4375
23.1 - 26	DW 20 B; DW 20 A	-	587	1585	700	4615	DB	16	TL	159 A6	2.30	4375
23.1 - 26	DW 20 B; DW 20 A	-	587	1585	700	4615	DB HD	16	TL	159 A6	2.30	4375
23.1 - 26	DW 20 B; DW 20 A	-	587	1585	700	4615	DB	18	TT	161 A6	2.60	4625
28" 8.3 - 28	W 7	W 6	213	1104	523	3246	STD	6	TT	103 A6	2.40	875
8.3 - 28	W 7	W 6	213	1104	523	3246	STD	8	TT	108 A6	3.20	1000
9.5 - 28	W 8	W 7	235	1155	542	3381	STD	6	TT	108 A6	2.10	1000
9.5 - 28	W 8	W 7	235	1155	542	3381	STD	8	TT	114 A6	2.80	1180

DB: Dual Bead Version
DB HD: Dual Bead Heavy Duty Version ③
STD: Standard



MAIN APPLICATION:
TRACTOR



TR 135 (R-1)

TR 135 is best suitable for soil tillage and spraying applications. Some sizes and versions are also suitable for excavators, trailers and harvesters. Traction, self-cleaning properties and stability are key features which make the TR 135 tire the ideal partner even on the most difficult ground conditions.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 30 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
28" 11.2 - 28	W 10	W 9	284	1205	565	3543	STD	8	TT	118 A6	2.40	1320
11.2 - 28	W 10	W 9	284	1205	565	3543	HD	8	TT	118 A6	2.40	1320
11.2 - 28	W 10	W 9	284	1205	565	3543	STD	10	TT	122 A6	3.00	1500
12.4 - 28	W 11	W 9; W 10	325	1260	589	3704	STD	6	TT	117 A6	1.70	1285
12.4 - 28	W 11	W 9; W 10	325	1260	589	3704	STD	8	TT	123 A6	2.30	1550
12.4 - 28	W 11	W 9; W 10	325	1260	589	3704	HD	8	TT	123 A6	2.30	1550
12.4 - 28	W 11	W 9; W 10	325	1260	589	3704	STD	10	TT	127 A6	2.90	1750
12.4 - 28	W 11	W 9; W 10	325	1260	589	3704	STD	12	TT	131 A6	3.50	1950
13.6 - 28	W 12	W 11	345	1310	614	4031	STD	8	TT	125 A6	2.00	1650
13.6 - 28	W 12	W 11	345	1310	614	4031	HD	8	TT	125 A6	2.00	1650
13.6 - 28	W 12	W 11	345	1310	614	4031	STD	12	TT	134 A6	3.00	2120
13.6 - 28	W 12	W 11	345	1310	614	4031	STD	14	TT	137 A6	3.50	2300
14.9 - 28	W 13	W 11; W 12	378	1365	634	4013	STD	6	TT	125 A6	1.40	1650
14.9 - 28	W 13	W 11; W 12	378	1365	634	4013	STD	8	TT	130 A6	1.80	1900
14.9 - 28	W 13	W 11; W 12	378	1365	634	4013	HD	8	TT	130 A6	1.80	1900

HD: Heavy Duty Version ①
STD: Standard

Tolerances: O.D. ± 2% - S.W. ± 2% - RC ± 2.5%



MAIN APPLICATION:
TRACTOR



TR 135 (R-1)

TR 135 is best suitable for soil tillage and spraying applications. Some sizes and versions are also suitable for excavators, trailers and harvesters. Traction, self-cleaning properties and stability are key features which make the TR 135 tire the ideal partner even on the most difficult ground conditions.



TRACTION

STABILITY

SELF-CLEANING

COMFORT

CUT & CHIP
RESISTANCE

DURABILITY

HEAVY DUTY SERVICE

SPECIAL
COMPOUND

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 30 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
28"												
14.9 - 28	W 13	W 11; W 12	378	1365	634	4013	STD	12	TT	137 A6	2.60	2300
14.9 - 28	W 13	W 11; W 12	378	1365	634	4013	STD	14	TT	139 A6	2.90	2430
18.4 - 28	W 16 L	W 15 L	467	1501	691	4413	STD	8	TL	138 A6	1.70	2360
18.4 - 28	W 16 L	W 15 L	467	1501	691	4413	STD	12	TL	147 A6	2.50	3075
30"												
7.2 - 30	W 6	-	185	1095	523	3219	STD	6	TT	95 A6	2.30	690
9.5 - 30	W 8	W 7	241	1200	567	3528	STD	6	TT	109 A6	2.10	1030
9.5 - 30	W 8	W 7	241	1200	567	3528	STD	8	TT	115 A6	2.80	1215
14.9 - 30	W 13	W 11; W 12	378	1415	659	4316	STD	8	TT	131 A6	1.80	1950
15 - 30 (18.4 - 30)	W 16 L	W 15 L	460	1545	714	4542	STD	12	TT	149 A6	2.30	3250
15 - 30 (18.4 - 30)	W 16 L	W 15 L	460	1545	714	4542	STD	14	TT	151 A6	2.60	3450
16.9 - 30 (14 - 30)	W 15 L	W 14 L	429	1485	687	4501	STD	8	TT	137 A6	1.70	2300
16.9 - 30 (14 - 30)	W 15 L	W 14 L	429	1485	687	4501	STD	10	TT	139 A6	2.00	2430
16.9 - 30 (14 - 30)	W 15 L	W 14 L	429	1485	687	4501	STD	14	TT	146 A6	2.80	3000
18.4 - 30 (15 - 30)	W 16 L	W 15 L	460	1545	707	4741	STD	8	TT	139 A6	1.40	2430
18.4 - 30 (15 - 30)	W 16 L	W 15 L	460	1545	707	4741	HD	8	TT	139 A6	1.40	2430

HD: Heavy Duty Version ①
STD: Standard



MAIN APPLICATION:
TRACTOR



TR 135 (R-1)

TR 135 is best suitable for soil tillage and spraying applications. Some sizes and versions are also suitable for excavators, trailers and harvesters. Traction, self-cleaning properties and stability are key features which make the TR 135 tire the ideal partner even on the most difficult ground conditions.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 30 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
30" 18.4 - 30 (15 - 30)	W 16 L	W 15 L	460	1545	707	4741	STD	10	TT	145 A6	1.80	2900
18.4 - 30 (15 - 30)	W 16 L	W 15 L	460	1545	707	4741	HD	10	TT	145 A6	1.80	2900
18.4 - 30 (15 - 30)	W 16 L	W 15 L	460	1545	707	4741	HD	10	TL	145 A6	1.80	2900
18.4 - 30 (15 - 30)	W 16 L	W 15 L	460	1545	707	4741	STD	12	TT	149 A6	2.30	3250
18.4 - 30 (15 - 30)	W 16 L	W 15 L	460	1545	707	4741	STD	12	TL	149 A6	2.30	3250
18.4 - 30 (15 - 30)	W 16 L	W 15 L	460	1545	707	4741	HD	12	TT	149 A6	2.30	3250
18.4 - 30 (15 - 30)	W 16 L	W 15 L	460	1545	707	4741	STD	14	TT	151 A6	2.60	3450
23.1 - 30	DW 20 B; DW 20 A	-	600	1700	780	4998	STD	8	TT	146 A6	1.10	3000
23.1 - 30	DW 20 B; DW 20 A	-	600	1700	780	4998	STD	8	TL	146 A6	1.10	3000
23.1 - 30	DW 20 B; DW 20 A	-	600	1700	780	4998	STD	12	TT	155 A6	1.70	3875
23.1 - 30	DW 20 B; DW 20 A	-	600	1700	780	4998	STD	12	TL	155 A6	1.70	3875
23.1 - 30	DW 20 B; DW 20 A	-	600	1700	780	4998	DB	12	TT	155 A6	1.70	3875
23.1 - 30	DW 20 B; DW 20 A	-	600	1700	780	4998	DB	18	TT	164 A6	2.60	5000
23.1 - 30	DW 20 B; DW 20 A	-	600	1700	780	4998	DB	18	TL	164 A6	2.60	5000

HD: Heavy Duty Version ①
DB: Dual Bead Version
STD: Standard

Tolerances: O.D. ± 2% - S.W. ± 2% - RC ± 2.5%



MAIN APPLICATION:
TRACTOR



TR 135 (R-1)

TR 135 is best suitable for soil tillage and spraying applications. Some sizes and versions are also suitable for excavators, trailers and harvesters. Traction, self-cleaning properties and stability are key features which make the TR 135 tire the ideal partner even on the most difficult ground conditions.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 30 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
32" 8.3 - 32	W 7	W 6	211	1195	572	3585	STD	6	TT	105 A6	2.40	925
8.3 - 32	W 7	W 6	211	1195	572	3585	STD	8	TT	111 A6	3.20	1090
9.5 - 32	W 8	W 7	235	1255	594	3686	STD	6	TT	110 A6	2.10	1060
12.4 - 32	W 11	W 9; W 10	325	1360	639	3998	STD	6	TT	119 A6	1.70	1360
12.4 - 32	W 11	W 9; W 10	325	1360	639	3998	STD	8	TT	124 A6	2.30	1600
12.4 - 32	W 11	W 9; W 10	325	1360	639	3998	HD	8	TT	124 A6	2.30	1600
34" 16.9 - 34	W 15 L	W 14 L	429	1585	738	4660	STD	8	TT	139 A6	1.70	2430
16.9 - 34	W 15 L	W 14 L	429	1585	738	4660	HD	8	TT	139 A6	1.70	2430
16.9 - 34	W 15 L	W 14 L	429	1585	738	4660	STD	10	TT	142 A6	2.00	2650
16.9 - 34	W 15 L	W 14 L	429	1585	738	4660	HD	10	TT	142 A6	2.00	2650
16.9 - 34	W 15 L	W 14 L	429	1585	738	4660	STD	12	TT	144 A6	2.30	2800
16.9 - 34	W 15 L	W 14 L	429	1585	738	4660	HD	12	TT	144 A6	2.30	2800
18.4 - 34	W 16 L	W 15 L	467	1650	766	4851	STD	6	TT	137 A6	1.10	2300
18.4 - 34	W 16 L	W 15 L	467	1650	766	4851	STD	8	TT	142 A6	1.40	2650
18.4 - 34	W 16 L	W 15 L	467	1650	766	4851	HD	8	TT	142 A6	1.40	2650

HD: Heavy Duty Version ①
STD: Standard



MAIN APPLICATION:
TRACTOR



TR 135 (R-1)

TR 135 is best suitable for soil tillage and spraying applications. Some sizes and versions are also suitable for excavators, trailers and harvesters. Traction, self-cleaning properties and stability are key features which make the TR 135 tire the ideal partner even on the most difficult ground conditions.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 30 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
34" 18.4 - 34	W 16 L	W 15 L	467	1650	766	4851	STD	10	TT	146 A6	1.80	3000
18.4 - 34	W 16 L	W 15 L	467	1650	766	4851	HD	10	TT	146 A6	1.80	3000
18.4 - 34	W 16 L	W 15 L	467	1650	766	4851	STD	12	TT	151 A6	2.30	3450
18.4 - 34	W 16 L	W 15 L	467	1650	766	4851	HD	12	TT	151 A6	2.30	3450
18.4 - 34	W 16 L	W 15 L	467	1650	766	4851	HD SPL	12	TT	151 A6	2.30	3450
18.4 - 34	W 16 L	W 15 L	467	1650	766	4851	STD	14	TT	154 A6	2.60	3750
18.4 - 34	W 16 L	W 15 L	467	1650	766	4851	HD	14	TT	154 A6	2.60	3750
23.1 - 34	DW 20 B; DW 20 A	-	585	1810	834	5321	STD	10	TT	153 A6	1.40	3650
23.1 - 34	DW 20 B; DW 20 A	-	585	1810	834	5321	STD	10	TL	153 A6	1.40	3650
36" 8.3 - 36	W 7	W 6	211	1295	619	3807	STD	6	TT	107 A6	2.40	975
8.3 - 36	W 7	W 6	211	1295	619	3807	STD	8	TT	113 A6	3.20	1150
9.5 - 36	W 8	W 7	235	1360	646	4000	STD	10	TT	122 A6	3.50	1500
12.4 - 36	W 11	W 9; W 10	325	1465	691	4307	STD	8	TT	126 A6	2.30	1700
12.4 - 36	W 11	W 9; W 10	325	1465	691	4307	HD	8	TT	126 A6	2.30	1700
12.4 - 36	W 11	W 9; W 10	325	1465	691	4307	STD	10	TT	131 A6	2.90	1950

HD: Heavy Duty Version ①
HD SPL: Heavy Duty Special Version ④
STD: Standard

Tolerances: O.D. ± 2% - S.W. ± 2% - RC ± 2.5%



MAIN APPLICATION:
TRACTOR



TR 135 (R-1)

TR 135 is best suitable for soil tillage and spraying applications. Some sizes and versions are also suitable for excavators, trailers and harvesters. Traction, self-cleaning properties and stability are key features which make the TR 135 tire the ideal partner even on the most difficult ground conditions.



TRACTION



STABILITY



SELF-CLEANING



COMFORT



CUT & CHIP RESISTANCE



DURABILITY



HEAVY DUTY SERVICE



SPECIAL COMPOUND

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 30 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
36" 12.4 - 36	W 11	W 9; W 10	325	1465	691	4307	HD	10	TT	131 A6	2.90	1950
12.4 - 36	W 11	W 9; W 10	325	1465	691	4307	STD	12	TT	135 A6	3.50	2180
12.4 - 36	W 11	W 9; W 10	325	1465	691	4307	STD	14	TT	139 A6	4.10	2430
13.6 - 36	W 12	W 11	345	1515	713	4454	STD	6	TT	125 A6	1.60	1650
13.6 - 36	W 12	W 11	345	1515	713	4454	STD	8	TT	129 A6	2.00	1850
13.6 - 36	W 12	W 11	345	1515	713	4454	STD	10	TT	134 A6	2.50	2120
13.6 - 36	W 12	W 11	345	1515	713	4454	HD	10	TT	134 A6	2.50	2120
38" 12.4 - 38	W 11	W 9; W 10	315	1525	721	4484	STD	8	TT	127 A6	2.30	1750
12.4 - 38	W 11	W 9; W 10	315	1525	721	4484	STD	14	TT	138 A6	3.70	2360
12.4 - 38	W 11	W 9; W 10	315	1525	721	4484	STD	14	TL	138 A6	3.70	2360
13.6 - 38 (14.00 - 38)	W 12	W 11	345	1565	738	4601	STD	8	TT	131 A6	2.00	1950
13.6 - 38 (14.00 - 38)	W 12	W 11	345	1565	738	4601	HD	8	TT	131 A6	2.00	1950
13.6 - 38 (14.00 - 38)	W 12	W 11	345	1565	738	4601	STD	12	TT	139 A6	3.00	2430
13.6 - 38 (14.00 - 38)	W 12	W 11	345	1565	738	4601	HD	12	TT	139 A6	3.00	2430
13.6 - 38 (14.00 - 38)	W 12	W 11	345	1565	738	4601	STD	14	TT	142 A6	3.50	2650

HD: Heavy Duty Version ①
STD: Standard



MAIN APPLICATION:
TRACTOR



TR 135 (R-1)

TR 135 is best suitable for soil tillage and spraying applications. Some sizes and versions are also suitable for excavators, trailers and harvesters. Traction, self-cleaning properties and stability are key features which make the TR 135 tire the ideal partner even on the most difficult ground conditions.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 30 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
38" 14.00 - 38 (13.6 - 38)	W 12	W 11	345	1565	738	4601	STD	8	TT	131 A6	2.00	1950
14.00 - 38 (13.6 - 38)	W 12	W 11	345	1565	738	4601	SPL	12	TT	139 A6	3.00	2430
15.5 - 38	W 14 L	-	395	1585	746	4660	STD	8	TT	133 A6	1.80	2060
15.5 - 38	W 14 L	-	395	1585	746	4660	HD	8	TT	133 A6	1.80	2060
15.5 - 38	W 14 L	-	395	1585	746	4660	STD	10	TT	138 A6	2.30	2360
15.5 - 38	W 14 L	-	395	1585	746	4660	HD	10	TT	138 A6	2.30	2360
16.9 - 38	W 15 L	W 14 L	429	1685	788	4954	STD	8	TT	141 A6	1.70	2575
16.9 - 38	W 15 L	W 14 L	429	1685	788	4954	HD	8	TT	141 A6	1.70	2575
16.9 - 38	W 15 L	W 14 L	429	1685	788	4954	STD	10	TT	143 A6	2.00	2725
16.9 - 38	W 15 L	W 14 L	429	1685	788	4954	HD	10	TT	143 A6	2.00	2725
16.9 - 38	W 15 L	W 14 L	429	1685	788	4954	STD	12	TT	146 A6	2.30	3000
18.4 - 38	W 16 L	W 15 L	467	1750	816	5145	STD	8	TT	143 A6	1.40	2725
18.4 - 38	W 16 L	W 15 L	467	1750	816	5145	HD	8	TT	143 A6	1.40	2725
18.4 - 38	W 16 L	W 15 L	467	1750	816	5145	HD	10	TT	148 A6	1.80	3150
18.4 - 38	W 16 L	W 15 L	467	1750	816	5145	HD	10	TL	148 A6	1.80	3150

STD: Standard
SPL: Special version
HD: Heavy Duty Version ①

Tolerances: O.D. ± 2% - S.W. ± 2% - RC ± 2.5%



MAIN APPLICATION:
TRACTOR



TR 135 (R-1)

TR 135 is best suitable for soil tillage and spraying applications. Some sizes and versions are also suitable for excavators, trailers and harvesters. Traction, self-cleaning properties and stability are key features which make the TR 135 tire the ideal partner even on the most difficult ground conditions.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 30 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
38" 18.4 - 38	W 16 L	W 15 L	467	1750	816	5145	STD	12	TT	153 A6	2.30	3650
18.4 - 38	W 16 L	W 15 L	467	1750	816	5145	HD	12	TT	153 A6	2.30	3650
20.8 - 38	W 18 L	W 16 L	530	1835	852	5395	STD	8	TT	148 A6	1.30	3150
20.8 - 38	W 18 L	W 16 L	530	1835	852	5395	STD	12	TT	156 A6	2.00	4000
20.8 - 38	W 18 L	W 16 L	530	1835	852	5395	HD	12	TT	156 A6	2.00	4000
20.8 - 38	W 18 L	W 16 L	530	1835	852	5395	STD	14	TT	160 A6	2.40	4500
20.8 - 38	W 18 L	W 16 L	530	1835	852	5395	DB HD	16	TT	163 A6	2.80	4875
42" 9.5 - 42	W 8	W 7	246	1510	722	4440	STD	10	TT	125 A6	3.50	1650
20.8 - 42	W 18 L	W 16 L	535	1950	909	5733	STD	12	TT	157 A6	2.00	4125

HD: Heavy Duty Version ①
DB: Dual Bead Version
STD: Standard



MAIN APPLICATION:
TRACTOR



TR 136 (R-1)

TR 136 has been developed by BKT to equip tractors and trailers in soil tillage and transport operations. This tire provides improved traction in all working conditions along with best cut and chip resistance to reduce machine downtime and increase your productivity.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 30 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
26"												
18.4 - 26	W 16 L	W 15 L	480	1450	646	4205	STD	12	TL	146 A6	2.30	3000
18.4 - 26	W 16 L	W 15 L	480	1450	646	4205	STD	12	TT	146 A6	2.30	3000
18.4 - 26	W 16 L	W 15 L	480	1450	646	4205	SPL	12	TL	146 A6	2.30	3000
28"												
12.4 - 28	W 11	W 9; W 10	315	1275	595	3749	STD	8	TT	123 A6	2.30	1550
30"												
16.9 - 30 (14 - 30)	W 15 L	W 14 L	429	1485	687	4501	STD	8	TT	137 A6	1.70	2300
16.9 - 30 (14 - 30)	W 15 L	W 14 L	429	1485	687	4501	HD	8	TT	137 A6	1.70	2300
16.9 - 30 (14 - 30)	W 15 L	W 14 L	429	1485	687	4501	SPL	8	TT	137 A6	1.70	2300
16.9 - 30 (14 - 30)	W 15 L	W 14 L	429	1485	687	4501	STD	10	TT	139 A6	2.00	2430
16.9 - 30 (14 - 30)	W 15 L	W 14 L	429	1485	687	4501	STD	12	TT	143 A6	2.40	2725
16.9 - 30 (14 - 30)	W 15 L	W 14 L	429	1485	687	4501	SPL	12	TT	143 A6	2.40	2725
18.4 - 30 (15 - 30)	W 16 L	W 15 L	465	1545	707	4741	STD	8	TT	139 A6	1.40	2430
18.4 - 30 (15 - 30)	W 16 L	W 15 L	465	1545	707	4741	HD	8	TT	139 A6	1.40	2430
18.4 - 30 (15 - 30)	W 16 L	W 15 L	465	1545	707	4741	HD	12	TT	149 A6	2.30	3250
18.4 - 30 (15 - 30)	W 16 L	W 15 L	465	1545	707	4741	SPL	12	TT	149 A6	2.30	3250
18.4 - 30 (15 - 30)	W 16 L	W 15 L	465	1545	707	4741	HD	14	TT	151 A6	2.60	3450

STD: Standard
HD: Heavy Duty Version ①
SPL: Special Version

Tolerances: O.D. ± 2% - S.W. ± 2% - RC ± 2.5%



MAIN APPLICATION:
TRACTOR



TR 144 (R-1)

TR 144 is suitable to equip small tractors to be used in soil tillage operations. It has been specially designed for wet conditions as you can find on wet and loose soil, and paddy fields. TR 144 ensures outstanding performance in all operating conditions which require both excellent traction and self-cleaning features. TR 144 is also available in a "special" version, which is best suitable for heavy-duty service.



TRACTION SUITABLE FOR MUDDY GROUND SELF-CLEANING COMFORT HEAVY DUTY SERVICE ^①

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 30 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
16"												
7 - 16	6 L; 6 LB; 6.00 F	-	183	740	345	2217	STD	4	TT	75 A6	1.60	387
8 - 16	6 L; 6 LB; 6.00 F	-	200	785	366	2360	STD	4	TT	83 A6	1.20	487
8 - 16	6 L; 6 LB; 6.00 F	-	200	785	366	2360	STD	6	TT	91 A6	1.90	615
8 - 16	6 L; 6 LB; 6.00 F	-	200	785	366	2360	SPL	6	TT	91 A6	1.90	615
9.5 - 16	W 8 L	8 LB	245	850	392	2542	STD	6	TT	96 A6	2.10	710
9.5 - 16	W 8 L	8 L B	245	850	392	2542	STD	8	TT	102 A6	2.80	850
18"												
8 - 18	W 6	W 7; 5.50 F	200	840	391	2520	STD	4	TT	85 A6	1.20	515
8 - 18	W 6	W 7; 5.50 F	200	840	391	2520	STD	6	TT	94 A6	1.90	670
8 - 18	W 6	W 7; 5.50 F	200	840	391	2520	SPL	6	TT	94 A6	1.90	670
20"												
8.3 - 20	W 7	W 6	211	890	414	2670	STD	6	TT	96 A6	2.40	710
22"												
9.5 - 22	W 7	W 8	235	1000	458	2985	STD	6	TT	104 A6	2.20	900

SPL: Special Version ^①
STD: Standard



MAIN APPLICATION:
TRACTOR



TR 171 (R-1W+)

TR 171 is a deep tread tire suitable for tractors in soil tillage operations. Thanks to its outstanding self-cleaning properties, it is ideal for wet and moist soil. Also in the harshest operating conditions, TR 171 provides excellent traction and extraordinary durability.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 30 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
12" 5.00 - 12	3.00 D DT; 3.00 D	4 JA; 3.50 B	130	580	271	1731	STD	4	TT	61 A6	2.00	257
5.00 - 12	3.00 D DT; 3.00 D	4 JA; 3.50 B	130	580	271	1731	STD	6	TT	67 A6	2.80	307
6.00 - 12	4.00 E DT; 4.00 E	4 JA	160	635	293	1867	STD	6	TT	76 A6	2.60	400
16" 9.5 - 16	W 8 L	8 LB	241	845	392	2499	STD	6	TT	96 A6	2.10	710
18" 8 - 18	W 6	W 7; 5.50 F	190	845	390	2515	STD	4	TT	85 A6	1.20	515
8 - 18	W 6	W 7; 5.50 F	190	845	390	2515	STD	6	TT	94 A6	1.90	670
9.5 - 18	W 8	-	241	900	417	2646	STD	8	TT	105 A6	3.00	925
20" 8.3 - 20	W 7	W 6	200	895	419	2670	STD	6	TT	96 A6	2.40	710
8.3 - 20	W 7	W 6	200	895	419	2670	STD	8	TT	101 A6	3.20	825
9.5 - 20	W 8	W 7	235	950	442	2835	STD	6	TT	101 A6	2.10	825
11.2 - 20	W 10	W 9; 9	285	1005	465	3000	STD	8	TT	113 A6	2.60	1150
22" 8.3 - 22	W 7	W 6	205	945	444	2778	STD	8	TT	104 A6	3.20	900
9.5 - 22	W 8	W 7	235	1005	469	2955	STD	8	TT	110 A6	3.00	1060

STD: Standard

Tolerances: O.D. ± 2% - S.W. ± 2% - RC ± 2.5%



MAIN APPLICATION:
TRACTOR



TR 171 (R-1W+)

TR 171 is a deep tread tire suitable for tractors in soil tillage operations. Thanks to its outstanding self-cleaning properties, it is ideal for wet and moist soil. Also in the harshest operating conditions, TR 171 provides excellent traction and extraordinary durability.



TRACTION



SUITABLE FOR MUDDY GROUND



SELF-CLEANING



DURABILITY



DEEP TREAD

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 30 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
24" 8.3 - 24	W 7	W 6	200	990	470	2970	STD	6	TT	100 A6	2.40	800
8.3 - 24	W 7	W 6	200	990	470	2970	STD	8	TT	105 A6	3.10	925
9.5 - 24	W 8	W 7	236	1055	500	3080	STD	6	TT	106 A6	2.10	950
9.5 - 24	W 8	W 7	236	1055	500	3080	STD	8	TT	111 A6	2.80	1090
11.2 - 24	W 10	W 9	285	1105	510	3270	STD	6	TT	110 A6	1.80	1060
11.2 - 24	W 10	W 9	285	1105	510	3270	STD	8	TT	116 A6	2.40	1250
12.4 - 24	W 11	W 9; W 10	315	1165	540	3480	STD	4	TT	106 A6	1.10	950
12.4 - 24	W 11	W 9; W 10	315	1165	540	3480	STD	6	TT	115 A6	1.70	1215
12.4 - 24	W 11	W 9; W 10	315	1165	540	3480	STD	8	TT	120 A6	2.30	1400
13.6 - 24	W 12	W 11	355	1210	562	3620	STD	6	TT	119 A6	1.60	1360
13.6 - 24	W 12	W 11	355	1210	562	3620	STD	8	TT	123 A6	2.00	1550
14.9 - 24	W 13	W 11; W 12	391	1265	584	3759	STD	6	TT	123 A6	1.40	1550
14.9 - 24	W 13	W 11; W 12	391	1265	584	3759	STD	8	TT	128 A6	1.80	1800
26" 11.2 - 26	W 10	W 9	284	1155	540	3396	STD	8	TT	117 A6	2.40	1285
12.4 - 26	W 11	W 10; W 9	315	1210	564	3557	STD	8	TT	121 A6	2.30	1450

STD: Standard



MAIN APPLICATION:
TRACTOR



TR 171 (R-1W+)

TR 171 is a deep tread tire suitable for tractors in soil tillage operations. Thanks to its outstanding self-cleaning properties, it is ideal for wet and moist soil. Also in the harshest operating conditions, TR 171 provides excellent traction and extraordinary durability.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 30 KM/H		
	Rec.	Alt.									↓		
											bar	max load (kg)	
26"	13.6 - 26	W 12	W 11	340	1270	589	3785	STD	4	TT	110 A6	1.00	1060
	13.6 - 26	W 12	W 11	340	1270	589	3785	STD	6	TT	120 A6	1.60	1400
	13.6 - 26	W 12	W 11	340	1270	589	3785	STD	8	TT	126 A6	2.20	1700
28"	12.4 - 28	W 11	W 9; W 10	315	1260	589	3759	STD	6	TT	117 A6	1.70	1285
	12.4 - 28	W 11	W 9; W 10	315	1260	589	3759	STD	8	TT	123 A6	2.30	1550
	12.4 - 28	W 11	W 9; W 10	315	1260	589	3759	STD	12	TT	131 A6	3.50	1950
	13.6 - 28	W 12	W 11	350	1300	607	3886	STD	4	TT	112 A6	1.00	1120
	13.6 - 28	W 12	W 11	350	1300	607	3886	STD	6	TT	121 A6	1.60	1450
	13.6 - 28	W 12	W 11	350	1300	607	3886	STD	8	TT	125 A6	2.00	1650
	13.6 - 28	W 12	W 11	350	1300	607	3886	STD	12	TT	134 A6	3.00	2120
	14.9 - 28	W 13	W 11; W 12	388	1361	632	4070	STD	8	TT	130 A6	1.80	1900
	14.9 - 28	W 13	W 11; W 12	388	1361	632	4070	STD	12	TT	137 A6	2.60	2300
	16.9 - 28	W 15 L	W 14 L	435	1440	665	4307	STD	8	TT	135 A6	1.70	2180
16.9 - 28	W 15 L	W 14 L	435	1440	665	4307	STD	12	TT	143 A6	2.40	2725	

STD: Standard

Tolerances: O.D. ± 2% - S.W. ± 2% - RC ± 2.5%



MAIN APPLICATION:
TRACTOR



TR 171 (R-1W+)

TR 171 is a deep tread tire suitable for tractors in soil tillage operations. Thanks to its outstanding self-cleaning properties, it is ideal for wet and moist soil. Also in the harshest operating conditions, TR 171 provides excellent traction and extraordinary durability.



TRACTION



SUITABLE FOR MUDDY GROUND



SELF-CLEANING



DURABILITY



DEEP TREAD

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 30 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
30"												
14.9 - 30	W 13	W 11; W 12	380	1415	659	4160	STD	8	TT	131 A6	1.80	1950
16.9 - 30	W 15 L	W 14 L	430	1490	690	4455	STD	8	TT	137 A6	1.70	2300
16.9 - 30	W 15 L	W 14 L	430	1490	690	4455	STD	12	TT	143 A6	2.40	2725
18.4 - 30	W 16 L	W 15 L	470	1550	716	4557	STD	10	TT	145 A6	1.80	2900
32"												
12.4 - 32	W 11	W 9; W 10	315	1370	643	4028	STD	8	TT	124 A6	2.30	1600
34"												
16.9 - 34	W 15 L	W 14 L	429	1585	738	4740	STD	8	TT	139 A6	1.70	2430
18.4 - 34	W 16 L	W 15 L	470	1655	768	4866	STD	10	TT	146 A6	1.80	3000
36"												
12.4 - 36	W 11	W 9; W 10	315	1470	691	4332	STD	8	TT	126 A6	2.30	1700
13.6 - 36	W 12	W 11	345	1520	715	4469	STD	8	TT	129 A6	2.00	1850
38"												
13.6 - 38	W 12	W 11	345	1585	738	4601	STD	8	TT	131 A6	2.00	1950
16.9 - 38	W 15 L	W 14 L	429	1685	788	4954	STD	8	TT	141 A6	1.70	2575
18.4 - 38	W 16 L	W 15 L	470	1760	820	5174	STD	10	TT	148 A6	1.80	3150

STD: Standard



MAIN APPLICATION:
TRACTOR



FARM 2000 (R-1)

The FARM 2000 tire is suitable on tractors for soil tillage and transport applications. It is the ideal tire for heavy-duty use and in all operating conditions where good traction is required.



TRACTION DURABILITY HEAVY DUTY SERVICE

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)		
	Rec.	Alt.									↓	↓	
15.3"	260/70 - 15.3	9.00	-	265	775	349	2294	STD	-	TL	126 A8/114 A8	bar	3.60
												km/h	1700
												40 FR LLV	1180
300/80 - 15.3	9.00	-	300	890	388	2608	STD	-	TL	132 A8/120 A8	bar	2.80	
											km/h	2000	
											40 FR LLV	1400	
16"	250/80 - 16	W 8	W 7; W 9; W 8 L	240	820	369	2412	STD	-	TT	125 A8/113 A8	bar	2.80
												km/h	1650
												40 FR LLV	1150
250/80 - 16	W 8	W 7; W 9; W 8 L	240	820	369	2412	STD	-	TL	125 A8/113 A8	bar	2.80	
											km/h	1650	
											40 FR LLV	1150	
18"	8 - 18	W 6	-	195	840	390	2515	STD	4	TT	-	bar	1.25
												km/h	515
												30	515
250/80 - 18	W 8	W7; W9	240	870	394	2566	STD	-	TT	127 A8/115 A8	bar	2.80	
											km/h	1750	
											40 FR LLV	1215	
250/80 - 18	W 8	W7; W9	240	870	394	2566	STD	-	TL	127 A8/115 A8	bar	2.80	
											km/h	1750	
											40 FR LLV	1215	
20"	8.3 - 20	W 7	-	210	895	417	2712	STD	4	TT	-	bar	1.60
												km/h	560
												30	560
8.3 - 20	W 7	-	210	895	417	2712	STD	6	TT	-	bar	2.40	
											km/h	710	
											30	710	
28"	12.4 - 28	W 11	W 9; W 10	320	1260	589	3704	STD	8	TT	123 A6	bar	2.30
												km/h	1550
												30	1550
12.4 - 28	W 11	W 9; W 10	320	1260	589	3704	STD	10	TT	127 A6	bar	2.90	
											km/h	1750	
											30	1750	
12.4 - 28	W 11	W 9; W 10	320	1260	589	3704	STD	12	TT	131 A6	bar	3.50	
											km/h	1950	
											30	1950	

STD: Standard

Tolerances: O.D. ± 2% - S.W. ± 2% - RC ± 2.5%



MAIN APPLICATION:
TRACTOR



FARM 2000 (R-1)

The FARM 2000 tire is suitable on tractors for soil tillage and transport applications. It is the ideal tire for heavy-duty use and in all operating conditions where good traction is required.



TRACTION DURABILITY HEAVY DUTY SERVICE

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 30 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
28" 13.6 - 28	W 12	W 11	345	1310	610	3851	STD	6	TT	121 A6	1.60	1450
13.6 - 28	W 12	W 11	345	1310	610	3851	STD	8	TT	125 A6	2.00	1650
13.6 - 28	W 12	W 11	345	1310	610	3851	STD	10	TT	130 A6	2.50	1900
13.6 - 28	W 12	W 11	345	1310	610	3851	STD	12	TT	134 A6	3.00	2120
14.9 - 28	W 13	W 11; W 12	385	1375	636	4194	STD	8	TT	130 A6	1.80	1900
14.9 - 28	W 13	W 11; W 12	385	1375	636	4194	STD	10	TT	134 A6	2.30	2120
14.9 - 28	W 13	W 11; W 12	385	1375	636	4194	STD	12	TT	137 A6	2.60	2300
14.9 - 28	W 13	W 11; W 12	385	1375	636	4194	STD	14	TT	139 A6	2.90	2430
16.9 - 28	W 15 L	W 14 L	429	1420	655	4310	STD	8	TT	135 A6	1.70	2180
16.9 - 28	W 15 L	W 14 L	429	1420	655	4310	STD	12	TT	143 A6	2.40	2725

STD: Standard



MAIN APPLICATION:
TRACTOR



AS 2001 (R-1)

AS 2001 is a bias cross-ply tire which best suits tractors in farming and haulage operations. The particularly strong casing provides very high durability and makes the AS 2001 tire ideal for heavy-duty operations.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 30 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
26" 18.4 - 26	W 16 L	W 15 L	467	1475	650	4250	STD	10	TT	142 A6	1.80	2650
18.4 - 26	W 16 L	W 15 L	467	1475	650	4250	STD	10	TL	142 A6	1.80	2650
18.4 - 26	W 16 L	W 15 L	467	1475	650	4250	STD	12	TT	146 A6	2.30	3000
18.4 - 26	W 16 L	W 15 L	467	1475	650	4250	STD	12	TL	146 A6	2.30	3000
18.4 - 26	W 16 L	W 15 L	467	1475	650	4250	STD	14	TT	149 A6	2.60	3250
28" 16.9 - 28	W 15 L	W 14 L	429	1420	655	4307	STD	8	TT	135 A6	1.70	2180
16.9 - 28	W 15 L	W 14 L	429	1420	655	4307	STD	10	TT	139 A6	2.00	2430
16.9 - 28	W 15 L	W 14 L	429	1420	655	4307	STD	12	TT	143 A6	2.40	2725
16.9 - 28	W 15 L	W 14 L	429	1420	655	4307	STD	12	TL	143 A6	2.4	2725
16.9 - 28	W 15 L	W 14 L	429	1420	655	4307	SPL	12	TT	143 A6	2.40	2725

STD: Standard
SPL: Special version



MAIN APPLICATION:
TRACTOR



TRAC FARM (R-1)

TRAC FARM is a heavy-duty tire specifically designed for tractors and soil tillage applications. Its strong casing and the deep tread make the tire suitable for the most difficult operating conditions, ensuring the best return on investment during the entire product life-cycle.



TRACTION



CUT & CHIP
RESISTANCE



DURABILITY



DEEP TREAD



HEAVY DUTY SERVICE

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 30 KM/H		
	Rec.	Alt.									↓		
											bar	max load (kg)	
20" 11.2 - 20	W 10	W 9	290	1000	463	2940	STD	8	TT	111 A6	2.40	1090	
28" 12.4 - 28	W 11	W 9, W 10	320	1295	604	3807	STD	10	TT	124 A6	2.40	1600	
	12.4 - 28	W 11	W 9 ; W 10	320	1295	604	3807	STD	12	TT	125 A6	2.50	1650
	13.6 - 28	W 12	W 11	365	1345	625	4089	STD	12	TT	128 A6	2.30	1800
	16.9 - 28	W 15 L	W 14 L	440	1435	663	4219	STD	12	TT	143 A6	2.40	2725
30" 18.4 - 30	W 16 L	W 15 L	467	1550	716	4557	STD	12	TT	149 A6	2.30	3250	

STD: Standard



MAIN APPLICATION:
TRACTOR



TR 270 (R-2)

TR 270 is a tractor tire suitable for soil tillage applications. It is specially designed for providing maximum performance on wet and moist soil. In these soil conditions, a tire is required to offer superior grip and enhanced self-cleaning features. TR 270 perfectly meets all these characteristics.



TRACTION



SUITABLE FOR MUDDY GROUND



SELF-CLEANING



DURABILITY



CUT & CHIP RESISTANCE



EXTRA DEEP TREAD

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 30 KM/H		
	Rec.	Alt.									↓		
											bar	max load (kg)	
26"	23.1 - 26	DW 20 A; DW 20 B	-	590	1646	739	4922	STD	8	TT	145 A6	1.10	2900
	23.1 - 26	DW 20 A; DW 20 B	-	590	1646	739	4922	STD	10	TT	149 A6	1.40	3250
	23.1 - 26	DW 20 A; DW 20 B	-	590	1646	739	4922	STD	12	TT	153 A6	1.70	3650
	23.1 - 26	DW 20 A; DW 20 B	-	590	1646	739	4922	STD	12	TL	153 A6	1.70	3650
	23.1 - 26	DW 20 A; DW 20 B	-	590	1646	739	4922	STD	14	TT	156 A6	2.00	4000
30"	18.4 - 30	DW 16 L; DW 16 A	W 15 L; DW 15 A	465	1580	720	4724	STD	8	TT	139 A6	1.40	2430
	18.4 - 30	DW 16 L; DW 16 A	W 15 L; DW 15 A	465	1580	720	4724	STD	8	TL	139 A6	1.40	2430
	18.4 - 30	DW 16 L; DW 16 A	W 15 L; DW 15 A	465	1580	720	4724	STD	12	TT	149 A6	2.30	3250
	23.1 - 30	DW 20 A; DW 20 B	-	590	1748	790	5227	STD	8	TT	146 A6	1.10	3000
	23.1 - 30	DW 20 A; DW 20 B	-	590	1748	790	5227	STD	10	TT	151 A6	1.40	3450
	23.1 - 30	DW 20 A; DW 20 B	-	590	1748	790	5227	STD	12	TT	155 A6	1.70	3875
34"	18.4 - 34	DW 16 A; W 16 L	W 15 L	465	1682	771	5029	STD	8	TT	142 A6	1.40	2650
	18.4 - 34	DW 16 A; W 16 L	W 15 L	465	1682	771	5029	STD	12	TT	151 A6	2.30	3450
	23.1 - 34	DW 20 A; DW 20 B	-	590	1850	841	5532	STD	8	TT	148 A6	1.10	3150

STD: Standard

Tolerances: O.D. ± 2% - S.W. ± 2% - RC ± 2.5%



MAIN APPLICATION:
TRACTOR



TR 270 (R-2)

TR 270 is a tractor tire suitable for soil tillage applications. It is specially designed for providing maximum performance on wet and moist soil. In these soil conditions, a tire is required to offer superior grip and enhanced self-cleaning features. TR 270 perfectly meets all these characteristics.



TRACTION



SUITABLE FOR MUDDY GROUND



SELF-CLEANING



DURABILITY



CUT & CHIP RESISTANCE



EXTRA DEEP TREAD

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 30 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
34" 23.1 - 34	DW 20 A; DW 20 B	-	590	1850	841	5532	STD	10	TT	153 A6	1.40	3650
23.1 - 34	DW 20 A; DW 20 B	-	590	1850	841	5532	STD	12	TT	156 A6	1.70	4000
23.1 - 34	DW 20 A; DW 20 B	-	590	1850	841	5532	STD	14	TT	160 A6	2.20	4500
38" 18.4 - 38	W 16 A; W 16 L	W 15 L; DD 16	465	1784	822	5334	STD	8	TT	143 A6	1.40	2725
18.4 - 38	W 16 A; W 16 L	W 15 L; DD 16	465	1784	822	5334	STD	12	TT	153 A6	2.30	3650
20.8 - 38	W 18 A; W 18 L	DD 18; DW 18 A	530	1830	841	5472	STD	8	TT	148 A6	1.30	3150
20.8 - 38	W 18 A; W 18 L	DD 18; W 18 A	530	1830	841	5472	STD	10	TT	151 A6	1.60	3450
20.8 - 38	W 18 A; W 18 L	DD 18; W 18 A	530	1830	841	5472	STD	12	TT	156 A6	2.00	4000

STD: Standard



MAIN APPLICATION:
TRACTOR



TR 273 (R-2)

TR 273 is a tractor tire suitable for soil tillage and specifically designed to provide maximum performance on wet and moist soil. In these soil conditions, a tire is required to offer superior grip and enhanced self-cleaning properties. TR 273 perfectly meets all these characteristics.



TRACTION



SUITABLE FOR
MUDDY GROUND



SELF-CLEANING



DURABILITY



CUT & CHIP
RESISTANCE



EXTRA
DEEP TREAD

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 30 KM/H		
	Rec.	Alt.									↓		
											bar	max load (kg)	
26"	23.1 - 26	DW 20 A; DW 20 B	-	590	1655	757	4998	STD	10	TT	149 A6	1.40	3250
	23.1 - 26	DW 20 A; DW 20 B	-	590	1655	757	4998	STD	12	TT	153 A6	1.70	3650
30"	18.4 - 30	W 16 L	W 15 L	465	1585	723	4739	STD	12	TT	149 A6	2.30	3250
	23.1 - 30	DW 20 A; DW 20 B	-	590	1748	-	-	STD	10	TT	151 A6	1.40	3450
34"	23.1 - 34	DW 20 A; DW 20 B	-	590	1850	-	-	STD	10	TT	153 A6	1.40	3650

STD: Standard



MAIN APPLICATION:
TRACTOR



TR 459 (R-4)

TR 459 has been particularly designed for digging and loading operations as well as municipality and maintenance applications with tractors and backhoe loaders. It offers high stability and is available in two versions. The "aramid-belted" version features high puncture resistance and is cut-and-chip-resistant, whilst the "special" version provides an extended tire life-cycle.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 40 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
24" 14.9 - 24	DW 13	DW 12; DW 11; DW 13 L	390	1244	562	3657	STD	8	TL	137 A8	2.10	2300
14.9 - 24	DW 13	DW 12; DW 11; DW 13 L	390	1244	562	3657	STD	12	TL	145 A8	2.90	2900
16.9 - 24	DW 15 L	DW 14 L	440	1310	590	3850	STD	8	TL	142 A8	1.90	2650
16.9 - 24	DW 15 L	DW 14 L	440	1310	590	3850	STD	10	TL	145 A8	2.20	2900
16.9 - 24	DW 15 L	DW 14 L	440	1310	590	3850	STD	12	TL	149 A8	2.60	3250
17.5L - 24	DW 15 L	DW 14 L	445	1270	557	3825	STD	8	TL	139 A8	1.70	2430
17.5L - 24	DW 15 L	DW 14 L	445	1270	557	3825	STD	10	TL	144 A8	2.20	2800
17.5L - 24	DW 15 L	DW 14 L	445	1270	557	3825	STD	12	TL	148 A8	2.70	3150
18.4 - 24	DW 16 L	DW 15 L	472	1375	603	4043	STD	12	TL	155 A8	2.50	3875
19.5L - 24	DW 16 L	-	490	1325	585	3840	STD	10	TL	147 A8	1.90	3075
19.5L - 24	DW 16 L	-	490	1325	585	3840	STD-DARD	12	TL	151 A8	2.30	3450
19.5L - 24	DW 16 L	-	490	1325	585	3840	SPL	12	TL	151 A8	2.30	3450
21L - 24	DW 18 L	-	533	1378	605	3995	STD	12	TL	155 A8	2.20	3875

STD: Standard
SPL: Special Version ①



MAIN APPLICATION:
TRACTOR



TR 459 (R-4)

TR 459 has been particularly designed for digging and loading operations as well as municipality and maintenance applications with tractors and backhoe loaders. It offers high stability and is available in two versions. The "aramid-belted" version features high puncture resistance and is cut-and-chip-resistant, whilst the "special" version provides an extended tire life-cycle.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 40 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
26"	18.4 - 26	DW 16 L / DW 15 L	472	1425	628	4346	STD	12	TL	156 A8	2.50	4000
	18.4 - 26	DW 16 L / DW 15 L	472	1425	628	4346	AB	12	TL	156 A8	2.50	4000
	18.4 - 26	DW 16 L / DW 15 L	472	1425	628	4346	STD	14	TL	159 A8	2.90	4375
28"	16.9 - 28	DW 15 L / DW 14 L	440	1410	640	4145	STD	8	TL	145 A8	1.90	2900
	16.9 - 28	DW 15 L / DW 14 L	440	1410	640	4145	STD	10	TL	148 A8	2.20	3150
	16.9 - 28	DW 15 L / DW 14 L	440	1410	640	4145	STD	12	TL	152 A8	2.60	3550
	18.4 - 28	DW 16 L / DW 15 L	472	1475	653	4337	STD	12	TL	157 A8	2.50	4125
	21L - 28	DW 18 A / -	535	1480	-	-	STD	12	TL	157 A8	2.20	4125
30"	16.9 - 30	DW 15 L / DW 14 L	440	1470	657	4484	STD	12	TL	153 A8	2.70	3650

STD: Standard
AB: Aramid Belted Version ②



MAIN APPLICATION:
TRACTOR



TR 461 (R-4)

TR 461 is a BKT pattern suitable for municipality and maintenance applications with tractors as well as for loading operations with telehandlers. The sidewall protection features particular resistance against cuts and bruises providing a longer life even on hard surfaces in addition to excellent stability.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 40 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
18" 12.5/80 - 18	W 9	11	305	987	435	2902	STD	12	TL	138 A8	3.70	2360
24" 16.9 - 24	DW 15 L	DW 14 L	440	1280	566	3763	STD	14	TL	151 A8	2.90	3450
19.5L - 24	DW 16 L	-	490	1310	578	3851	STD	12	TL	151 A8	2.30	3450
19.5L - 24	DW 16 L	-	490	1310	578	3851	STD	14	TL	154 A8	2.60	3750
21L - 24	DW 18 L	-	540	1385	607	4072	STD	14	TL	157 A8	2.50	4125
28" 16.9 - 28	DW 15 L	DW 14 L	440	1390	620	4087	STD	14	TL	154 A8	2.90	3750

STD: Standard



MAIN APPLICATION:
TRACTOR



TRAC SUPER

TRAC SUPER is the first radial tire introduced in BKT's municipality segment. The tire structure ensures an excellent smooth drive combined with best traction performance. As a result, it is particularly suitable for applications on large lawn surfaces such as parks and roadsides.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)										
		Rec.	Alt.							↓										
											bar	0.8	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6
17"											km/h									
440/50 R 17	135 D	14.00	13.00	441	872	395	2630	410	STD		65	955	960	1070	1265	1440	1635	1855	1985	2180
											40	1300	1305	1455	1720	1960	2225	2525	2700	2965
											30	1440	1450	1615	1915	2175	2475	2805	3000	3295
											10	1720	1730	1925	2280	2595	2945	3340	3575	3925

STD: Standard



AT 316

AT 316 is suitable for compact utility tractors in municipality and maintenance applications. The special tread design provides excellent traction without compromising field protection - an essential feature for this kind of application. AT 316 is also available as "aramid-belted" version to provide increased puncture resistance.



SIZE	RIM		S.W. (in.)	O.D. (in.)	SLR (in.)	RC (in.)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 15 KM/H	
	Rec.	Alt.									bar	max load (kg)
12"	10.50 I - 55; I - 70; I - 90	-	315	610	271	1769	STD	4	TL	-	1.40	775
24 X 12.00 - 12	10.50 I - 55; I - 70; I - 90	-	315	610	271	1769	AB	6	TL	-	2.20	1030

STD: Standard

AB: Aramid Belted Version ①



MAIN APPLICATION:
HARVESTER



AGRIMAX TERIS

RADIAL HARVESTING TIRES

Today's high-power harvesters require tires that are able to support heavy equipment and loads without damaging the crops. BKT is committed to provide you with radial tires at the cutting edge to increase your yield. AGRIMAX TERIS is the right partner for all your combined operations.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)											
		Rec.	Alt.							↓											
26"	620/75 R 26	166 A8/B	DW 20 B	-	625	1590	730	4851	750	STD	bar										
											km/h										
											0.8	1.0	1.4	1.6	2.0	2.4	2.8	3.2	3.4	3.8	
											50	2440	2810	3445	3765	4135	4505	4880	5300	-	-
											40	2440	2810	3445	3765	4135	4505	4880	5300	-	-
											30	2615	3010	3690	4030	4430	4825	5225	5675	-	-
											10 LT	3270	3770	4620	5045	5545	6040	6540	7105	-	-
											10 HT	2615	3010	3690	4030	4430	4825	5225	5675	-	-
											10 Cyc	-	4010	5140	5635	6535	7165	7840	8515	8650	9010
											750/65 R 26 (28L R 26)	166 A8/B	DW 25 B	DW 23 B	764	1636	713	4908	750	STD	bar
km/h																					
0.8	1.0	1.4	1.6	2.0	2.4	2.8															
50	2915	3340	4085	4400	4880	5300	-														
40	2915	3340	4085	4400	4880	5300	-														
30	3125	3580	4370	4715	5225	5675	-														
10 LT	3910	4480	5475	5900	6540	7105	-														
10 HT	3125	3580	4370	4715	5225	5675	-														
10 Cyc	-	4960	6220	6850	7570	8020	9010														
750/65 R 26 (28L R 26)	171 A8/B	DW 25 B	DW 23 B	764	1636	713	4908	750	STD	bar											
										km/h											
										0.8	1.0	1.4	1.6	2.0	2.4	2.8	3.2	3.4	3.8		
										50	2915	3340	4085	4400	4880	5300	5660	6150	-	-	
										40	2915	3340	4085	4400	4880	5300	5660	6150	-	-	
										30	3125	3580	4370	4715	5225	5675	6060	6585	-	-	
										10 LT	3910	4480	5475	5900	6540	7105	7590	8245	-	-	
										10 HT	3125	3580	4370	4715	5225	5675	6060	6585	-	-	
										10 Cyc	-	4960	6220	6850	7570	8020	9010	9880	10040	10455	
										30"	620/75 R 30	168 A8/B	DW 20 B	-	625	1710	779	5169	800	STD	bar
km/h																					
0.8	1.0	1.4	1.6	2.0	2.4	2.8	3.2	3.4	3.8												
50	2580	2970	3640	3980	4370	4760	5155	5600	-												-
40	2580	2970	3640	3980	4370	4760	5155	5600	-												-
30	2760	3180	3900	4260	4680	5100	5520	5995	-												-
10 LT	3455	3980	4880	5330	5855	6380	6905	7505	-												-
10 HT	2760	3180	3900	4260	4680	5100	5520	5995	-												-
10 Cyc	-	4240	5430	5950	6905	7570	8285	9000	9140												9520
32"	650/75 R 32	172 A8/B	DW 21 B	DW 20 B; DW 23 B	655	1789	794	5324	825												STD
										km/h											
										0.8	1.0	1.4	1.6	2.0	2.4	2.8	3.2	3.4	3.8		
										50	2900	3340	4095	4475	4915	5355	5800	6300	-	-	
										40	2900	3340	4095	4475	4915	5355	5800	6300	-	-	
										30	3105	3575	4385	4790	5265	5735	6210	6745	-	-	
										10 LT	3885	4480	5490	6000	6590	7180	7770	8445	-	-	
										10 HT	3105	3575	4385	4790	5265	5735	6210	6745	-	-	
										10 Cyc	-	4770	6105	6695	7765	8515	9320	10125	10285	10710	

STD: Standard



MAIN APPLICATION:
HARVESTER



AGRIMAX TERIS

RADIAL HARVESTING TIRES

Today's high-power harvesters require tires that are able to support heavy equipment and loads without damaging the crops. BKT is committed to provide you with radial tires at the cutting edge to increase your yield. AGRIMAX TERIS is the right partner for all your combined operations.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)												
		Rec.	Alt.																			
32" 800/65 R 32	178 A8/175 B	DW 27 B	DW 25 B; DH 27 B	818	1853	838	5587	875	STD	bar	0.8	1.0	1.4	1.6	2.0	2.4	2.8	3.2	3.4	3.8		
										km/h	3175	3660	4485	4900	5385	5865	6350	6900	-	-		
										50	3450	3975	4875	5325	5850	6375	6900	7500	-	-		
										40	3695	4255	5220	5700	6260	6825	7385	8025	-	-		
										30	4625	5330	6535	7140	7840	8545	9250	10050	-	-		
										10 LT	3695	4255	5220	5700	6260	6825	7385	8025	-	-		
										10 HT	-	5655	7230	7960	9250	10140	11055	12025	12265	12750		
900/60 R 32	181 A8/178 B	DW 27 B	DW 28 B; DW 30 B	886	1893	840	5736	925	STD	bar	0.8	1.0	1.4	1.6	2.0	2.4	2.8	3.2	3.4	3.8		
										km/h	3375	3825	4800	5325	5850	6375	6975	7500	-	-		
										50	3715	4210	5280	5860	6435	7015	7675	8250	-	-		
										40	3975	4505	5655	6270	6890	7510	8215	8830	-	-		
										30	4975	5640	7080	7850	8625	9400	10285	11055	-	-		
										10 LT	3975	4505	5655	6270	6890	7510	8215	8830	-	-		
										10 HT	-	6245	7995	8770	10170	10595	11595	12460	13010	14025		
900/60 R 32	185 A8/182 B	DW 27 B	DW 28 B; DW 30 B	886	1893	840	5736	925	STD	bar	0.8	1.0	1.4	1.6	2.0	2.4	2.8	3.2	3.6	4.0	4.4	4.8
										km/h	3375	3825	4800	5325	5850	6375	6975	7500	7990	8500	-	-
										50	3715	4210	5280	5860	6435	7015	7675	8250	8695	9250	-	-
										40	3975	4505	5655	6270	6890	7510	8215	8830	9305	9900	-	-
										30	4975	5640	7080	7850	8625	9400	10285	11055	11655	12395	-	-
										10 LT	3975	4505	5655	6270	6890	7510	8215	8830	9305	9900	-	-
										10 HT	-	6245	7995	8770	10170	10595	11595	12460	13270	14110	14920	15700
1050/50 R 32	184 A8/181 B	36.0 VA	-	1059	1893	840	5685	875	STD	bar	0.8	1.0	1.4	1.6	2.0	2.4	2.8	3.2	3.4	3.8		
										km/h	3795	4375	5365	5860	6435	7015	7590	8250	-	-		
										50	4140	4770	5850	6390	7020	7650	8280	9000	-	-		
										40	4430	5105	6260	6840	7515	8190	8860	9630	-	-		
										30	5550	6395	7840	8565	9410	10255	11100	12060	-	-		
										10 LT	4430	5105	6260	6840	7515	8190	8860	9630	-	-		
										10 HT	-	6810	8725	9565	11095	11555	12645	13595	14195	15300		

STD: Standard



MAIN APPLICATION:
HARVESTER



AGRIMAX TERIS

RADIAL HARVESTING TIRES

Today's high-power harvesters require tires that are able to support heavy equipment and loads without damaging the crops. BKT is committed to provide you with radial tires at the cutting edge to increase your yield. AGRIMAX TERIS is the right partner for all your combined operations.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)												
		Rec.	Alt.																			
34" IF 580/80 R 34 CFO	177 D	DW 20 B; DW 20 A	DW 21 A; DW 21 B	586	1792	810	5389	850	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4	2.8	3.2	3.6	
										km/h	65	2705	3140	3580	4090	4530	4965	5405	5770	6355	6865	7300
											50	2705	3140	3580	4090	4530	4965	5405	5770	6355	6865	7300
											40	2705	3140	3580	4090	4530	4965	5405	5770	6355	6865	7300
											30	2705	3140	3580	4090	4530	4965	5405	5770	6355	6865	7300
											30 Cyc.	3515	4080	4655	5315	5890	6455	7025	7500	8260	8925	9490
											25	2705	3140	3580	4090	4530	4965	5405	5770	6355	6865	7300
											15 Cyc.	4195	4865	5550	6340	7020	7695	8380	8945	9850	10640	11315
											10	2705	3140	3580	4090	4530	4965	5405	5770	6355	6865	7300
										42" 520/85 R 42	168 D	DW 16 L	DD 18 L	516	1951	890	5851	925	STD	bar	0.6	0.8
km/h	65	1850	2185	2520	2800	3140	3420	3980	4540											5100	5600	-
	50	1945	2295	2650	2940	3295	3590	4175	4765											5355	5880	-
	40	2025	2395	2765	3070	3440	3745	4360	4970											5585	6135	-
	30	2130	2515	2900	3220	3610	3930	4575	5250											5865	6440	-
	25	2195	2590	2990	3320	3720	4055	4715	5380											6045	6640	-
	10	2775	3280	3780	4200	4705	5125	5965	6805											7645	8400	-
	10 Cyc.	-	-	-	-	-	-	-	-											-	-	9520

STD: Standard



MAIN APPLICATION:
HARVESTER



AGRIMAX RT 600

RADIAL TRACTOR TIRES

AGRIMAX RT 600 is the ideal tire for grassland, harvesting and spraying applications. Thanks to its large ground contact area, AGRIMAX RT 600 ensures an excellent pressure distribution and protects your soil preserving the productivity of your business.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)												
		Rec.	Alt.																			
32" 800/65 R 32 (30.5L R 32)	176 A8/173 B	DW 27 B	DH 27 B; DW 25 B	775	1820	823	5558	875	STD	bar	0.8	1.0	1.2	1.6	2.0	2.4	2.8	3.0	3.2	3.6		
										km/h	0.8	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	4.4	
										50	3175	3660	4485	4900	5385	5865	6350	6500	-	-	-	-
										40	3450	3975	4875	5325	5850	6375	6900	7100	-	-	-	-
										30	3695	4255	5220	5700	6260	6825	7385	7600	-	-	-	-
										10 LT	4625	5330	6535	7140	7840	8545	9250	9515	-	-	-	-
										10 HT	3695	4255	5220	5700	6260	6825	7385	7600	-	-	-	-
10 Cyc.	-	5655	7230	7960	9250	10140	11055	11540	12025	12440	-	-	-									
800/65 R 32 (30.5L R 32)	181 A8/178 B	DW 27 B	DH 27 B; DW 25 B	775	1820	823	5558	875	STD	bar	0.8	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	4.4	
										km/h	0.8	1.0	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	4.4	
										50	3175	3660	4485	4900	5385	5865	6350	6900	7500	-	-	-
										40	3450	3975	4875	5325	5850	6375	6900	7500	8250	-	-	-
										30	3695	4255	5220	5700	6260	6825	7385	8025	8830	-	-	-
										10 LT	4625	5330	6535	7140	7840	8545	9250	10050	11055	-	-	-
										10 HT	3695	4255	5220	5700	6260	6825	7385	8025	8830	-	-	-
10 Cyc.	-	5655	7230	7960	9250	10140	11055	12025	12440	13000	14000	-	-									
1050/50 R 32	184 A8/181 B	36.0 VA	-	1059	1863	826	5700	875	STD	bar	0.8	1.0	1.4	1.6	2.0	2.4	2.8	3.2	3.4	3.8		
										km/h	0.8	1.0	1.4	1.6	2.0	2.4	2.8	3.2	3.4	3.8		
										50	3795	4375	5365	5860	6435	7015	7590	8250	-	-	-	-
										40	4140	4770	5850	6390	7020	7650	8280	9000	-	-	-	-
										30	4430	5105	6260	6840	7515	8190	8860	9630	-	-	-	-
										10 LT	5550	6395	7840	8565	9410	10255	11100	12060	-	-	-	-
										10 HT	4430	5105	6260	6840	7515	8190	8860	9630	-	-	-	-
10 Cyc.	-	6810	8725	9565	11095	11555	12645	13595	14195	15300	-	-	-									

STD: Standard



MAIN APPLICATION:
HARVESTER



STAR TRAC

STAR TRAC is the BKT tire for harvesters at cotton farms, which is able to support heavy loads. Thanks to its particularly deep tread design, it ensures both excellent traction in the fields and excellent performance during road transfers. On cotton plantations showing the typical middle-sized shrubs, harvesting demands tire features like excellent flotation and reduced soil compaction. Moreover, the tire is made of a special compound providing high resistance against cuts and typical damages of this application.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)	
	Rec.	Alt.									↓	
32" DW 500/95 D 32	13.00 DW	-	500	1836	809	5324	STD	-	TL	162 A8/169 A5	bar	1.70
											km/h	4750
											40	4750
											25	5800
VA 500/95 D 32	13.00 VA	-	500	1836	809	5324	STD	-	TL	179 A8/186 A5	bar	4.20
											km/h	7750
											40	7750
											25	9500

STD: Standard



MAIN APPLICATION:
HARVESTER



TR 137 (R-1)

TR 137 is BKT's most suitable tire for all harvesting operations. It ensures high flotation capability along with low soil compaction and excellent traction in the field. The tire is available in different versions: the "aramid-belted" version provides better puncture resistance and protection against all typical damages of this application; the "HD" version is for high load capacity to improve today's farmers' requirements in terms of productivity.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 30 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
32" 24.5 - 32	DW 21 B	DW 20 B	622	1805	807	5343	STD	12	TL	159 A6	1.70	4375
24.5 - 32	DW 21 B	DW 20 B	622	1805	807	5343	STD	14	TL	163 A6	2.00	4875
30.5L - 32	DH 27 B	DW 27 B	770	1865	831	5520	STD	12	TL	162 A6	1.40	4750
30.5L - 32	DH 27 B	DW 27 B	770	1865	831	5520	STD	14	TL	164 A6	1.60	5000
30.5L - 32	DH 27 B	DW 27 B	770	1865	831	5520	STD	16	TL	167 A6	1.80	5450
30.5L - 32	DH 27 B	DW 27 B	770	1865	831	5520	AB	18	TL	170 A6	2.10	6000
30.5L - 32	DH 27 B	DW 27 B	770	1865	831	5520	HD	18	TL	170 A6	2.10	6000

STD: Standard
AB: Aramid Belted Version ①
HD: Heavy Duty Version ②



**MAIN APPLICATION:
HARVESTER**



TR 360

TR 360 is suitable for implement machinery in hay harvesting and lawn and garden applications. The particular tread design along with the casing structure provides excellent stability in all field conditions and ensures a long tire life-cycle.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 30 KM/H	
	Rec.	Alt.									bar	max load (kg)
8" 18 X 7 - 8	5.5	-	180	460	202	1334	STD	6	TL	-	3.10	450

STD: Standard



TR 882

TR 882 is a very versatile tire suitable for several applications and vehicles. Designed to fit implement machinery and hay harvesters/balers, its usage is not only limited to soil tillage and hay harvesting operations. BKT has developed a specific TR 882 version to use the tire in forestry applications with trailers. TR 882 is also available as "aramid-belted", "HD" and "special" versions to meet specific end user requirements.



SIZE	RIM		S.W. (in.)	O.D. (in.)	SLR (in.)	RC (in.)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)		
	Rec.	Alt.									bar	km/h	
15.5" 400/60 - 15.5	AG 13.00	-	400	875	380	2564	STD	8	TL	138 A6/132 A8	2.40	3.20	
											30 FR LLV	2120	-
											30 DW LLV	1500	-
											30 FR HLV	-	2360
											40 FR HLV	-	2000
400/60 - 15.5	AG 13.00	-	400	875	380	2564	STD	14	TL	149 A6/143 A8	3.60	4.90	
											30 FR LLV	2900	-
											30 DW LLV	2000	-
											30 FR HLV	-	3250
											40 FR HLV	-	2725

STD: Standard



MAIN APPLICATION:
HARVESTER



TR 882

TR 882 is a very versatile tire suitable for several applications and vehicles. Designed to fit implement machinery and hay harvesters/balers, its usage is not only limited to soil tillage and hay harvesting operations. BKT has developed a specific TR 882 version to use the tire in forestry applications with trailers. TR 882 is also available as "aramid-belted", "HD" and "special" versions to meet specific end user requirements.



TRACTION



HIGH LOAD CAPACITY AT STANDARD PRESSURE



AGRO-INDUSTRIAL USE



CUT & CHIP RESISTANCE



HEAVY DUTY SERVICE



HIGH PUNCTURE RESISTANCE

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)			
	Rec.	Alt.												
15.5"	400/60 - 15.5	AG 13.00	-	400	875	380	2564	AB	14	TL	149 A6/143 A8	bar	3.60	4.90
												km/h		
												30 FR LLV	2900	-
												30 DW LLV	2000	-
												30 FR HLV	-	3250
												40 FR HLV	-	2725
												bar	3.60	4.90
												km/h		
												30 FR LLV	2900	-
												30 DW LLV	2000	-
30 FR HLV	-	3250												
40 FR HLV	-	2725												
bar	3.60	4.90												
km/h														
30 FR LLV	2900	-												
30 DW LLV	2000	-												
30 FR HLV	-	3250												
40 FR HLV	-	2725												
bar	4.50	6.20												
km/h														
30 FR LLV	3250	-												
30 DW LLV	2300	-												
30 FR HLV	-	3875												
40 FR HLV	-	3250												
bar	4.50	6.20												
km/h														
30 FR LLV	3250	-												
30 DW LLV	2300	-												
30 FR HLV	-	3875												
40 FR HLV	-	3250												
bar	4.50	6.20												
km/h														
30 FR LLV	3250	-												
30 DW LLV	2300	-												
30 FR HLV	-	3875												
40 FR HLV	-	3250												

STD: Standard
 AB: Aramid Belted Version ①
 HD: Heavy Duty Version ②
 SPL: Special Version ③



MAIN APPLICATION:
HARVESTER




FLOTATION 558

FLOTATION 558 is a cross-ply flotation tire suitable for hay harvesters/balers, implement machinery and trailers both on and off the road. It is particularly recommended on muddy grounds and whenever traction and high flotation are essential for good soil tillage.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	L.S.I. Free Rolling	L.S.I. Drive Wheel	LOAD CAPACITY (KG/TIRE)															
	Rec.	Alt.										↓															
22.5" 400/55 - 22.5	AG 11.75	12.25; 13.00; AG 13.00	405	1020	445	3084	STD	14	TL	138 A8/134 B	150 A8/146 B	bar	3.00	3.20	3.50												
												km/h															
												10 FR	4285	4450	4690												
												20 FR	3855	4005	4220												
												30 FR	3425	3560	3750												
												40 FR	3060	3180	3350												
												50 FR	2755	2860	3000												
												10 DW	3015	3135	3305												
												20 DW	2715	2820	2975												
												30 DW	2415	2510	2645												
												40 DW	2155	2240	2360												
												50 DW	1940	2015	2120												
												400/55 - 22.5	AG 11.75	12.25; 13.00; AG 13.00	405	1020	445	3084	STD	16	TL	140 A8/136 B	152 A8/148 B	bar	3.60	3.80	4.00
																								km/h			
10 FR	4675	4825	4970																								
20 FR	4210	4340	4475																								
30 FR	3740	3860	3975																								
40 FR	3340	3445	3550																								
50 FR	3005	3100	3150																								
10 DW	3290	3395	3500																								
20 DW	2960	3055	3150																								
30 DW	2630	2715	2800																								
40 DW	2350	2425	2500																								
50 DW	2115	2185	2240																								
500/45 - 22.5	AG 16.00	-	500	1045	471	3167	STD	12	TL	136 A8/132 B	148 A8/144 B													bar	2.30	2.50	2.70
																								km/h			
												10 FR	4020	4215	4410												
												20 FR	3615	3795	3970												
												30 FR	3215	3370	3530												
												40 FR	2870	3010	3150												
												50 FR	2585	2710	2800												
												10 DW	2855	2995	3135												
												20 DW	2570	2695	2820												
												30 DW	2285	2395	2510												
												40 DW	2040	2140	2240												
												50 DW	1835	1925	2000												
												500/45 - 22.5	AG 16.00	-	500	1045	471	3167	STD	16	TL	142 A8/138 B	154 A8/150 B	bar	3.20	3.40	3.60
																								km/h			
10 FR	4900	5075	5250																								
20 FR	4410	4570	4725																								
30 FR	3920	4060	4200																								
40 FR	3500	3625	3750																								
50 FR	3150	3265	3350																								
10 DW	3465	3590	3710																								
20 DW	3120	3230	3340																								
30 DW	2770	2875	2970																								
40 DW	2475	2565	2650																								
50 DW	2230	2310	2360																								

STD: Standard



**MAIN APPLICATION:
PIVOT IRRIGATOR**



TR 117 (R-1)

TR 117 is ideal for irrigation applications with pivot irrigators. In line with BKT's commitment to design tires that protect the soil, the TR 117 tire has round-shaped lugs to reduce soil damage and protect the precious crops.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 30 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
24" 11.2 - 24	W 10	W 9	284	1090	509	3205	STD	4	TT	101 A6	1.20	825
11.2 - 24	W 10	W 9	284	1090	509	3205	STD	4	TL	101 A6	1.20	825
11.2 - 24	W 10	W 9	284	1090	509	3205	STD	6	TT	110 A6	1.80	1060
11.2 - 24	W 10	W 9	284	1090	509	3205	STD	6	TL	110 A6	1.80	1060
13.6 - 24	W 12	W 11	350	1187	-	-	STD	6	TT	119 A6	2.20	1360
14.9 - 24	W 13	W 11; W 12	378	1245	575	3660	STD	4	TT	112 A6	0.80	1120
14.9 - 24	W 13	W 11; W 12	378	1245	575	3660	STD	4	TL	112 A6	0.80	1120
14.9 - 24	W 13	W 11; W 12	378	1245	575	3660	STD	6	TT	123 A6	1.40	1550
14.9 - 24	W 13	W 11; W 12	378	1245	575	3660	STD	6	TL	123 A6	1.40	1550
14.9 - 24	W 13	W 11; W 12	378	1245	575	3660	STD	8	TT	128 A6	1.80	1800
14.9 - 24	W 13	W 11; W 12	378	1245	575	3660	STD	8	TL	128 A6	1.80	1800
38" 11.2 - 38	W 10	W 9	284	1445	687	4248	STD	4	TT	109 A6	1.30	1030
11.2 - 38	W 10	W 9	284	1445	687	4248	STD	4	TL	109 A6	1.30	1030
11.2 - 38	W 10	W 9	284	1445	687	4248	STD	6	TT	117 A6	1.80	1285
11.2 - 38	W 10	W 9	284	1445	687	4248	STD	6	TL	117 A6	1.80	1285

STD: Standard

Tolerances: O.D. ± 2% - S.W. ± 2% - RC ± 2.5%



MAIN APPLICATION:
FLOTATION



RIDEMAX FL 690

RADIAL TRANSPORT TIRES

RIDEMAX FL 690 is a radial flotation and transport tire for tank trucks, trailers and spreaders. The tire is suitable for 75% on-the-road applications. Its special tread design provides outstanding self-cleaning properties in the field. As a response to the increasing demand for high loads in modern agriculture, BKT has designed this steel-belted tire withstanding very heavy loads and increasing the farmer's productivity.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)										
		Rec.	Alt.							↓										
26" 28L R 26 (750/65 R 26)	176 A8/173 B	DW 25 B	DW 23 B	719	1590	695	4745	750	STD	bar	0.8	1.0	1.4	1.6	2.0	2.4	2.8			
										km/h										
										50	3120	3560	4325	4680	5330	5915	6500			
										40	3410	3885	4725	5115	5825	6465	7100			
										30	3820	4355	5295	5730	6525	7240	7955			
										25	4060	4625	5620	6085	6930	7690	8450			
										10	4775	5440	6615	7160	8155	9050	9940			
32" 30.5L R 32 (800/65 R 32)	181 B	DH 27 B	DW 27 B	790	1800	806	5430	875	STD	bar	0.8	1.0	1.4	1.6	2.0	2.4	2.8	3.0		
										km/h										
										50	3795	4375	5280	5695	6520	7260	7920	8250		
										40	4370	5030	6075	6550	7500	8355	9115	9490		
										30	4935	5685	6865	7405	8475	9440	10300	10725		
										25	5205	5995	7240	7805	8935	9950	10855	11305		
										10	6040	6955	8400	9055	10365	11550	12600	13120		

STD: Standard



MAIN APPLICATION:
FLOTATION



RIDEMAX FL 693 M

RADIAL TRANSPORT TIRES

RIDEMAX FL 693 M is the ideal radial tire for those who frequently travel on the road with trailers/tank trucks. Actually designed mainly for on-the-road use, RIDEMAX FL 693 M provides excellent road performance prioritizing both comfort and self-cleaning properties. The speed index classes D/E of the range stands for higher speeds when travelling on the road leading to significant time savings. The low rolling resistance contributes to less fuel consumption.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)										
		Rec.	Alt.							↓										
17" 500/50 R 17	149 D/146 E	16.00	-	503	932	424	2833	450	STD	bar										
										km/h										
										0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	5.0	
										70	870	1110	1350	1530	1770	2010	2220	2430	2670	3000
										65	945	1205	1465	1660	1920	2180	2405	2635	2895	3250
										50	1145	1460	1775	2010	2325	2640	2915	3190	3505	3935
										40	1285	1640	1990	2255	2610	2965	3275	3585	3935	4420
25	1490	1900	2315	2620	3030	3445	3800	4160	4575	5135										
10	1700	2165	2635	2985	3455	3920	4330	4740	5210	5850										
22.5" 500/45 R 22.5	146 D/143 E	AG 16.00	-	503	1022	455	3114	500	STD	bar										
										km/h										
										1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0			
										70	1120	1390	1585	1830	2075	2265	2480	2725		
										65	1230	1530	1740	2010	2280	2490	2730	3000		
										50	1490	1855	2110	2435	2760	3015	3305	3630		
										40	1675	2085	2370	2735	3105	3390	3715	4080		
25	1945	2420	2750	3180	3605	3935	4315	4740												
10	2215	2755	3135	3620	4105	4485	4915	5400												
500/60 R 22.5	155 D/152 E	AG 16.00	15.00; 17.00	503	1172	531	3577	550	STD	bar										
										km/h										
										1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0			
										70	1495	1775	2095	2400	2665	2985	3270	3550		
										65	1630	1940	2290	2620	2910	3255	3565	3875		
										50	1970	2345	2770	3170	3520	3940	4315	4690		
										40	2215	2635	3110	3560	3955	4430	4850	5270		
25	2575	3065	3615	4135	4595	5145	5635	6125												
10	2930	3490	4120	4710	5235	5860	6420	6975												
560/45 R 22.5	152 D/149 E	AG 16.00	-	543	1076	484	3270	525	STD	bar										
										km/h										
										1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0			
										70	1365	1625	1920	2195	2440	2730	2990	3250		
										65	1495	1775	2095	2400	2665	2985	3270	3550		
										50	1810	2150	2540	2905	3225	3615	3960	4300		
										40	2030	2415	2850	3265	3625	4060	4445	4830		
25	2360	2805	3310	3790	4210	4715	5165	5610												
10	2685	3195	3775	4315	4795	5370	5880	6390												

STD: Standard



MAIN APPLICATION:
FLOTATION



RIDEMAX FL 693 M

RADIAL TRANSPORT TIRES

RIDEMAX FL 693 M is the ideal radial tire for those who frequently travel on the road with trailers/tank trucks. Actually designed mainly for on-the-road use, RIDEMAX FL 693 M provides excellent road performance prioritizing both comfort and self-cleaning properties. The speed index classes D/E of the range stands for higher speeds when travelling on the road leading to significant time savings. The low rolling resistance contributes to less fuel consumption.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)										
		Rec.	Alt.							↓										
22.5" 560/55 R 22.5	158 D/155 E	AG 16.00	17.00; 20.00	543	1180	533	3614	550	STD	bar	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0		
										km/h	70	1630	1940	2290	2620	2910	3255	3565	3875	
										65	1785	2125	2510	2870	3190	3570	3910	4250		
										50	2165	2575	3040	3475	3860	4325	4735	5145		
										40	2430	2890	3415	3905	4335	4860	5320	5780		
										25	2825	3360	3965	4535	5040	5645	6180	6715		
										10	3215	3825	4515	5165	5740	6430	7040	7650		
560/60 R 22.5	161 D/158 E	AG 16.00	16.00; 17.00; AG 20.00	543	1244	549	3767	600	STD	bar	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0		
										km/h	70	1745	2170	2465	2850	3230	3530	3870	4250	
										65	1900	2360	2685	3100	3515	3840	4210	4625		
										50	2300	2860	3250	3755	4260	4650	5100	5600		
										40	2580	3210	3650	4215	4785	5225	5725	6290		
										25	3000	3730	4240	4900	5560	6070	6655	7310		
										10	3415	4250	4830	5580	6330	6910	7580	8325		
560/60 R 22.5	165 D/162 E	AG 16.00	16.00; 17.00; AG 20.00	543	1244	549	3767	600	STD	bar	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	5.0	
										km/h	70	1745	2170	2465	2850	3230	3530	3870	4250	4750
										65	1900	2360	2685	3100	3515	3840	4210	4625	5150	
										50	2300	2860	3250	3755	4260	4650	5100	5600	6235	
										40	2580	3210	3650	4215	4785	5225	5725	6290	7005	
										25	3000	3730	4240	4900	5560	6070	6655	7310	8140	
										10	3415	4250	4830	5580	6330	6910	7580	8325	9270	
580/65 R 22.5	166 D/163 E	AG 18.00	AG 16.00	577	1326	572	4031	625	STD	bar	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0		
										km/h	70	2050	2440	2880	3295	3660	4095	4485	4875	
										65	2230	2650	3130	3580	3975	4455	4880	5300		
										50	2695	3210	3785	4335	4815	5390	5905	6415		
										40	3030	3605	4255	4870	5410	6060	6635	7210		
										25	3520	4190	4945	5655	6285	7035	7705	8375		
										10	4010	4770	5630	6440	7155	8015	8780	9540		

STD: Standard



MAIN APPLICATION:
FLOTATION



RIDEMAX FL 693 M

RADIAL TRANSPORT TIRES

RIDEMAX FL 693 M is the ideal radial tire for those who frequently travel on the road with trailers/tank trucks. Actually designed mainly for on-the-road use, RIDEMAX FL 693 M provides excellent road performance prioritizing both comfort and self-cleaning properties. The speed index classes D/E of the range stands for higher speeds when travelling on the road leading to significant time savings. The low rolling resistance contributes to less fuel consumption.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)								
		Rec.	Alt.							↓								
22.5" 600/50 R 22.5	159 D/156 E	AG 20.00	-	611	1172	516	3546	550	STD	bar								
										km/h								
										1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	
										70	1680	2040	2360	2720	3080	3320	3680	4000
										65	1840	2235	2585	2975	3370	3635	4025	4375
										50	2225	2705	3125	3605	4080	4395	4875	5295
										40	2500	3035	3515	4050	4585	4940	5475	5950
										25	2905	3530	4080	4705	5325	5740	6365	6915
10	3310	4020	4650	5355	6065	6540	7245	7875										
650/50 R 22.5	163 D/160 E	AG 20.00	-	645	1222	535	3715	575	STD	bar								
										km/h								
										1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	
										70	1845	2295	2610	3015	3420	3735	4095	4500
										65	2000	2490	2830	3270	3705	4050	4440	4875
										50	2420	3010	3425	3955	4485	4900	5370	5900
										40	2720	3385	3850	4445	5040	5505	6035	6630
										25	3160	3930	4470	5165	5860	6400	7015	7705
10	3600	4480	5090	5880	6670	7285	7990	8775										
26.5" 650/55 R 26.5	169 D	AG 20.00	-	645	1389	608	4216	650	STD	bar								
										km/h								
										1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	
										70	2230	2705	3130	3605	4085	4400	4880	5300
										65	2440	2960	3425	3945	4470	4815	5340	5800
										50	2950	3585	4145	4775	5410	5830	6460	7020
										40	3315	4025	4660	5370	6080	6550	7260	7890
										25	3850	4675	5410	6235	7060	7610	8435	9165
10	4385	5325	6160	7100	8040	8670	9605	10440										
710/50 R 26.5	170 D	AG 24.00	AG 20.00	727	1383	606	4174	650	STD	bar								
										km/h								
										1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	
										70	2290	2780	3220	3710	4200	4525	5015	5450
										65	2520	3060	3540	4080	4620	4980	5520	6000
										50	3050	3705	4285	4940	5595	6030	6680	7260
										40	3430	4165	4815	5550	6285	6775	7510	8160
										25	3985	4835	5595	6450	7300	7870	8725	9480
10	4540	5510	6375	7345	8320	8965	9940	10800										

STD: Standard



MAIN APPLICATION:
FLOTATION



RIDEMAX FL 693 M

RADIAL TRANSPORT TIRES

RIDEMAX FL 693 M is the ideal radial tire for those who frequently travel on the road with trailers/tank trucks. Actually designed mainly for on-the-road use, RIDEMAX FL 693 M provides excellent road performance prioritizing both comfort and self-cleaning properties. The speed index classes D/E of the range stands for higher speeds when travelling on the road leading to significant time savings. The low rolling resistance contributes to less fuel consumption.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)									
		Rec.	Alt.							↓									
											bar	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0
											km/h								
710/50 R 30.5	173 D	AG 24.00	AG 20.00	727	1485	656	4510	700	STD	bar	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	
										km/h									
										70	2520	3060	3540	4080	4620	4980	5520	6000	
										65	2730	3315	3835	4420	5005	5395	5980	6500	
										50	3305	4015	4645	5350	6060	6530	7240	7865	
										40	3715	4510	5220	6015	6810	7340	8135	8840	
										25	4315	5240	6060	6985	7910	8525	9450	10270	
10	4915	5970	6905	7960	9010	9715	10765	11700											
750/60 R 30.5	181 D	AG 24.00	-	754	1675	728	5092	800	STD	bar	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	
										km/h									
										70	3155	3835	4435	5110	5785	6235	6910	7510	
										65	3465	4210	4870	5610	6355	6850	7590	8250	
										50	4195	5095	5895	6790	7690	8290	9190	9985	
										40	4715	5725	6620	7630	8640	9315	10325	11220	
										25	5475	6650	7695	8865	10040	10820	11995	13035	
10	6240	7575	8765	10100	11435	12330	13665	14850											
850/50 R 30.5	182 D	AG 28.00	-	862	1625	719	4925	725	STD	bar	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	
										km/h									
										70	3250	3945	4565	5260	5960	6425	7120	7735	
										65	3570	4335	5015	5780	6545	7055	7820	8500	
										50	4320	5250	6070	6995	7920	8540	9465	10285	
										40	4860	5900	6825	7865	8905	9595	10640	11560	
										25	5645	6850	7925	9135	10345	11150	12360	13430	
10	6430	7805	9030	10405	11785	12700	14080	15300											

STD: Standard



MAIN APPLICATION:
FLOTATION



FL 630

FL 630 is a radial flotation and transport tire mainly for field use and particularly suitable also for spreading. Its tread pattern features excellent self-cleaning properties and a non-directional tread design enabling higher traction in both drive directions.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)																
		Rec.	Alt.							↓																
22.5" 500/60 R 22.5	155 D/166 A8	AG 16.00	15.00; 16.00; 17.00	503	1172	521	3592	550	STD	bar																
										km/h								1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	
										70	1485	1780	2085	2385	2670	2970	3250	3530								
										65	1630	1950	2290	2610	2930	3255	3565	3875								
										50	1970	2345	2770	3160	3540	3940	4315	4690								
										40	2230	2680	3110	3560	3990	4440	4880	5300								
										25	2575	3080	3615	4110	4630	5130	5635	6125								
										10	2930	3500	4100	4700	5250	5850	6420	6975								
26.5" 600/55 R 26.5	165 D/176 A8	AG 20.00	-	611	1333	596	4092	625	STD	bar																
										km/h								1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	
										70	1970	2395	2770	3190	3520	3940	4315	4690								
										65	2165	2630	3040	3480	3865	4330	4740	5150								
										50	2620	3160	3680	4220	4710	5240	5740	6235								
										40	2985	3625	4190	4810	5325	5965	6535	7100								
										25	3420	4150	4825	5510	6120	6840	7490	8140								
										10	3895	4730	5470	6280	6970	7790	8530	9270								
650/55 R 26.5	169 D/180 A8	AG 20.00	-	645	1389	600	4270	650	STD	bar																
										km/h								1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	
										70	2220	2695	3120	3595	4070	4385	4860	5280								
										65	2440	2960	3425	3945	4470	4815	5340	5800								
										50	2950	3585	4145	4775	5410	5830	6460	7020								
										40	3360	4080	4720	5440	6160	6640	7360	8000								
										25	3850	4675	5410	6235	7060	7610	8435	9165								
										10	4385	5325	6160	7100	8040	8670	9605	10440								
710/50 R 26.5	170 D/181 A8	AG 24.00	AG 20.00	727	1383	615	4246	650	STD	bar																
										km/h								1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	
										70	2295	2785	3225	3715	4095	4590	5025	5460								
										65	2520	3060	3550	4050	4530	5040	5520	6000								
										50	3050	3700	4285	4930	5475	6100	6680	7260								
										40	3465	4190	4870	5590	6210	6930	7590	8250								
										25	3985	4810	5595	6410	7150	7965	8725	9480								
										10	4540	5510	6375	7225	8120	9075	9940	10800								

STD: Standard



MAIN APPLICATION:
FLOTATION



FL 630 PLUS

FL 630 PLUS is a radial flotation and transport tire mainly for field use and particularly suitable also for spreading. Its tread pattern features excellent self-cleaning properties in all the conditions of use and reduces soil compaction preserving the value of the crops.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)									
		Rec.	Alt.							↓									
22.5" 560/45 R 22.5 (550/45 R 22.5)	152 D/163 A8	AG 16.00	-	543	1076	484	3303	525	STD	bar	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	
										km/h	70	1360	1620	1910	2170	2430	2720	2980	3235
										65	1495	1790	2095	2380	2700	2960	3270	3550	
										50	1810	2150	2450	2900	3240	3615	3960	4300	
										40	2050	2450	2880	3270	3675	4090	4485	4875	
										25	2360	2820	3310	3775	4230	4700	5165	5610	
										10	2685	3200	3775	4300	4820	5350	5880	6390	
										bar	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	
										km/h	70	1770	2105	2485	2845	3160	3540	3875	4210
										65	1945	2315	2730	3100	3500	3870	4255	4625	
50	2355	2820	3300	3770	4210	4700	5155	5600											
40	2650	3150	3720	4240	4765	5280	5800	6300											
25	3075	3670	4315	4920	5520	6110	6730	7310											
10	3500	4165	4915	5620	6260	6980	7660	8325											
22.5" 600/50 R 22.5	159 D/170 A8	AG 20.00	-	611	1172	521	3592	550	STD	bar	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	
										km/h	70	1675	2020	2355	2680	3020	3330	3670	3985
										65	1840	2220	2585	2950	3310	3660	4025	4375	
										50	2225	2700	3125	3575	4000	4420	4875	5295	
										40	2520	3040	3540	4050	4555	5020	5520	6000	
										25	2905	3510	4080	4675	5210	5800	6365	6915	
										10	3310	4000	4650	5325	5940	6600	7245	7875	
										bar	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	
										km/h	70	1770	2105	2485	2845	3160	3540	3875	4210
										65	1945	2320	2730	3100	3500	3870	4255	4625	
50	2355	2830	3305	3780	4210	4690	5155	5600											
40	2650	3150	3720	4240	4750	5280	5800	6300											
25	3075	3660	4300	4910	5500	6120	6730	5310											
10	3500	4160	4915	5600	6265	6995	7660	8325											
26.5" 800/45 R 26.5	174 D/184 A8	AG 24.00	AG 28.00	788	1393	618	4277	675	STD	bar	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	
										km/h	70	2565	3100	3600	4120	4600	5125	5615	6100
										65	2815	3400	3955	4540	5050	5630	6165	6700	
										50	3410	4120	4785	5500	6100	6815	7465	8110	
										40	3780	4570	5310	6080	6785	7560	8280	9000	
										25	4450	5400	6250	7160	7985	8900	9745	10590	
										10	5070	6140	7120	8160	9085	10135	11100	12060	

STD: Standard



MAIN APPLICATION:
FLOTATION



FL 630 SUPER

FL 630 SUPER is suitable for trailers, tankers and spreaders. Thanks to its constructive features and tread design, FL630 SUPER is the ideal tire for multipurpose use on any kind of land or on the road, where qualities like uniform drive and resistance are further highlighted.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)									
		Rec.	Alt.							↓									
22.5" 560/60 R 22.5	161 D	AG 16.00	17.00; 20.00	543	1244	549	3785	600	STD	bar		1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0
										km/h		1785	2125	2510	2870	3190	3570	3910	4250
										70		1945	2315	2730	3125	3470	3885	4255	4625
										65		2355	2800	3305	3780	4200	4705	5155	5600
										50		2645	3145	3715	4250	4720	5285	5790	6290
										40		3075	3655	4315	4935	5485	6145	6730	7310
										25		3500	4165	4915	5620	6245	6995	7660	8325
										10									
										10									
										580/65 R 22.5	166 D	AG 16.00	-	557	1326	594	4058	625	STD
km/h		2030	2465	2850	3285	3720	4005	4440	4825										
70		2230	2705	3130	3605	4085	4400	4880	5300										
65		2695	3275	3785	4365	4940	5325	5905	6415										
50		3030	3682	4255	4905	5555	5985	6635	7210										
40		3520	4275	4945	5695	6450	6955	7705	8375										
25		4010	4870	5630	6490	7350	7950	8780	9540										
10																			
10																			
26.5" 600/55 R 26.5	165 D	AG 20.00	-	611	1333	606	4078	625	STD										
										km/h		1970	2395	2770	3190	3615	3895	4315	4690
										70		2165	2630	3040	3505	3970	4275	4740	5150
										65		2620	3180	3680	4240	4805	5180	5740	6235
										50		2945	3575	4135	4765	5395	5815	6445	7005
										40		3420	4155	4805	5540	6270	6760	7490	8140
										25		3895	4730	5470	6305	7140	7695	8530	9270
										10									
										10									
										650/55 R 26.5	169 D	AG 20.00	-	645	1389	627	4258	650	STD
km/h		2220	2695	3120	3595	4070	4385	4860	5280										
70		2440	2960	3425	3945	4470	4815	5340	5800										
65		2950	3585	4145	4775	5410	5830	6460	7020										
50		3315	4025	4660	5370	6080	6550	7260	7890										
40		3850	4675	5410	6235	7060	7610	8435	9165										
25		4385	5385	6160	7100	8040	8670	9605	10440										
10																			
10																			

STD: Standard



MAIN APPLICATION:
FLOTATION



FL 630 SUPER

FL 630 SUPER is suitable for trailers, tankers and spreaders. Thanks to its constructive features and tread design, FL630 SUPER is the ideal tire for multipurpose use on any kind of land or on the road, where qualities like uniform drive and resistance are further highlighted.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)								
		Rec.	Alt.															
26.5" 650/65 R 26.5	174 D	AG 20.00	-	645	1519	684	4653	725	STD	bar								
										km/h								
										1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	
										70	2565	3115	3600	4150	4700	5065	5615	6100
										65	2815	3420	3955	4560	5160	5565	6165	6700
										50	3410	4140	4785	5515	6245	6735	7465	8110
										40	3830	4650	5380	6200	7020	7570	8390	9115
										25	4450	5405	6250	7205	8155	8790	9745	10590
										10	5070	6155	7120	8205	9290	10010	11100	12060
										750/45 R 26.5	170 D	AG 24.00	-	754	1349	606	4147	650
km/h																		
1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0											
70	2240	2785	3170	3660	4150	4535	4970	5460										
65	2460	3060	3480	4020	4560	4980	5460	6000										
50	2980	3705	4215	4865	5520	6030	6610	7260										
40	3350	4165	4735	5470	6205	6775	7430	8160										
25	3890	4835	5500	6355	7205	7870	8630	9480										
10	4430	5510	6265	7240	8210	8965	9830	10800										
750/60 R 26.5	180 D	AG 24.00	-	754	1574	694	4800	725	STD									
										km/h								
										1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	
										70	3070	3725	4310	4965	5625	6060	6720	7300
										65	3360	4080	4720	5440	6160	6640	7360	8000
										50	4070	4940	5715	6585	7455	8035	8910	9680
										40	4570	5550	6420	7400	8380	9035	10010	10880
										25	5310	6450	7460	8600	9735	10495	11630	12640
										10	6050	7345	8500	9795	11090	11955	13250	14400
										30.5" 650/65 R 30.5	176 D	AG 20.00	-	645	1621	734	4976	775
km/h																		
1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0											
70	2720	3300	3815	4400	4980	5370	5950	6465										
65	2985	3625	4190	4830	5470	5895	6535	7100										
50	3610	4385	5075	5845	6620	7135	7910	8595										
40	4060	4930	5700	6570	7440	8020	8890	9660										
25	4715	5725	6620	7630	8640	9315	10325	11220										
10	5370	6520	7545	8695	9845	10610	11760	12780										
750/60 R 30.5	181 D	AG 24.00	-	754	1675	746	5115	800	STD									
										km/h								
										1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	
										70	3155	3835	4435	5110	5785	6235	6910	7510
										65	3465	4210	4870	5610	6355	6850	7590	8250
										50	4195	5095	5895	6790	7690	8290	9190	9985
										40	4715	5725	6620	7630	8640	9315	10325	11220
										25	5475	6650	7695	8865	10040	10820	11995	13035
										10	6240	7575	8765	10100	11435	12330	13665	14850

STD: Standard



MAIN APPLICATION:
FLOTATION



FL 630 ULTRA

FL 630 ULTRA is a flotation tire suitable for field and road applications with trailers, tankers and spreaders. Its resistant structure provides excellent traction and perfect grip even in bends and when maneuvering. The particular tread design ensures excellent grip on any kind of terrain in addition to enhanced self-cleaning features.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)																
		Rec.	Alt.							↓																
22.5" 500/60 R 22.5	155 D/166 A8	AG 16.00	15.00; 16.00; 17.00	503	1172	521	3592	550	STD																	
										bar								1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	
										km/h								70	1485	1780	2085	2385	2670	2970	3250	3530
																		65	1630	1950	2290	2610	2930	3255	3565	3875
																		50	1970	2345	2770	3160	3540	3940	4315	4690
																		40	2230	2680	3110	3560	3990	4440	4880	5300
																		25	2575	3080	3615	4110	4630	5130	5635	6125
								10	2930	3500	4100	4700	5250	5850	6420	6975										
26.5" 600/55 R 26.5	165 D/176 A8	AG 20.00	-	611	1333	579	4034	625	STD																	
										bar								1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	
										km/h								65	2165	2630	3040	3505	3970	4275	4740	5150
																		50	2620	3180	3680	4240	4805	5180	5740	6235
																		40	2985	3625	4190	4830	5470	5895	6535	7100
																		25	3420	4155	4805	5540	6270	6760	7490	8140
																		10	3895	4730	5470	6305	7140	7695	8530	9270
26.5" 650/55 R 26.5	169 D/180 A8	AG 20.00	-	645	1389	600	4207	650	STD																	
										bar								1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	
										km/h								65	2440	2960	3425	3945	4470	4815	5340	5800
																		50	2950	3585	4145	4775	5410	5830	6460	7020
																		40	3360	4080	4720	5440	6160	6640	7360	8000
																		25	3850	4675	5410	6235	7060	7610	8435	9165
																		10	4385	5325	6160	7100	8040	8670	9605	10440

STD: Standard



MAIN APPLICATION:
FLOTATION



FL 635

FL 635 is a radial flotation tire suitable for both road and field usage. The special block pattern has been designed for grassland/hay baler applications. FL 635 ensures a great pressure distribution on the ground across the footprint and drastically reduces the soil compaction to preserve the value of the crops.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)									
		Rec.	Alt.							↓									
											bar	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0
650/55 R 22.5	167 D	AG 20.00	-	645	1287	568	3901	600	STD	km/h	70	2035	2530	2880	3325	3770	4120	4515	4960
											65	2235	2780	3165	3655	4145	4525	4960	5450
											50	2705	3365	3830	4420	5015	5475	6005	6595
											40	3045	3785	4305	4970	5640	6155	6750	7415
											25	3535	4395	5000	5775	6550	7155	7840	8615
											10	4025	5005	5690	6575	7460	8145	8930	9810

STD: Standard



MAIN APPLICATION:
FLOTATION



FL 639

FL 639 is a field-oriented flotation radial tire also suitable for spreading applications. Its wide footprint area ensures low soil compaction resulting in increased crop productivity. The reinforced bead and the sidewall protection contribute to an extended tire life-cycle.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)								
		Rec.	Alt.							↓								
22.5" 560/45 R 22.5	152 D/163 A8	AG 16.00	-	543	1076	484	3303	525	STD	bar	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0
										km/h	1360	1620	1910	2170	2430	2720	2980	3235
										70	1495	1790	2095	2380	2700	2960	3270	3550
										65	1810	2150	2540	2900	3240	3615	3960	4300
										50	2050	2450	2880	3270	3675	4090	4485	4875
										40	2360	2820	3310	3775	4230	4700	5165	5610
										25	2685	3200	3775	4300	4820	5350	5880	6390
										10	2685	3200	3775	4300	4820	5350	5880	6390
600/50 R 22.5	159 D/170 A8	AG 20.00	-	611	1172	521	3592	550	STD	bar	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0
										km/h	1675	2020	2355	2680	3020	3330	3670	3985
										70	1840	2220	2585	2950	3310	3660	4025	4375
										65	2225	2700	3125	3575	4000	4420	4875	5295
										50	2520	3040	3540	4050	4555	5020	5520	6000
										40	2905	3510	4080	4675	5210	5800	6365	6915
										25	3310	4000	4650	5325	5940	6600	7245	7875
										10	3310	4000	4650	5325	5940	6600	7245	7875
710/40 R 22.5	161 D/172 A8	AG 24.00	-	727	1140	503	3492	550	STD	bar	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0
										km/h	1770	2150	2485	2865	3245	3495	3875	4210
										70	1945	2360	2730	3145	3565	3840	4255	4625
										65	2355	2860	3305	3810	4315	4650	5155	5600
										50	2645	3210	3715	4280	4845	5225	5790	6290
										40	3075	3730	4315	4975	5630	6070	6730	7310
										25	3500	4250	4915	5665	6415	6910	7660	8325
										10	3500	4250	4915	5665	6415	6910	7660	8325

STD: Standard



MAIN APPLICATION:
FLOTATION



FLOTATION 351 (HF-3)

FLOTATION 351 is a bias flotation tire which best suits transport applications with trailers. Extra deep lugs provide outstanding traction and a longer tire life. FLOTATION 351 is the ideal tire on wet and moist surfaces and helps to improve the productivity of today's farming businesses.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 50 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
20" 42 X 25 - 20	20.50 HF	20.50 VF	605	1110	508	3302	STD	12	TL	135 B	3.10	2180
42 X 25 - 20	20.50 HF	20.50 VF	605	1110	508	3302	STD	16	TL	139 B	3.70	2430
48 X 25 - 20	20.50 HF	20.50 VF	630	1270	559	3785	STD	10	TL	144 B	2.40	2800
48 X 31 - 20	26.00 HF	26.00 VF	775	1283	559	3886	STD	12	TL	148 B	2.70	3150
25" 66 X 43 - 25	36.0 TH	-	1020	1750	782	5213	STD	10	TL	160 B	1.70	4500
66 X 43 - 25	36.0 TH	-	1020	1750	782	5213	STD	16	TL	170 B	2.80	6000

STD: Standard



FL 353

FL 353 features excellent traction and high stability as well as enhanced self-cleaning properties. Its reinforced bead contributes to an extended tire life-cycle. FL 353 provides high flotation capability to reduce soil compaction.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 50 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
25" 66 X 43.00 - 25	36.0TH	-	1108	1658	-	-	STD	6	TL	-	2.10	5000

STD: Standard



MAIN APPLICATION:
FLOTATION



FLOTATION 558

FLOTATION 558 is a cross-ply flotation tire suitable for hay harvesters/balers, implement machinery and trailers both on and off the road. It is particularly recommended on muddy grounds and whenever traction and high flotation are essential for good soil tillage.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	L.S.I. Free Rolling	L.S.I. Drive Wheel	LOAD CAPACITY (KG/TIRE)			
	Rec.	Alt.										↓			
22.5" 400/55 - 22.5	AG 11.75	12.25; 13.00; AG 13.00	405	1020	445	3084	STD	14	TL	138 A8/134 B	150 A8/146 B	bar	3.00	3.20	3.50
												km/h			
												10 FR	4285	4450	4690
												20 FR	3855	4005	4220
												30 FR	3425	3560	3750
												40 FR	3060	3180	3350
												50 FR	2755	2860	3000
												10 DW	3015	3135	3305
												20 DW	2715	2820	2975
												30 DW	2415	2510	2645
												40 DW	2155	2240	2360
												50 DW	1940	2015	2120
												400/55 - 22.5	AG 11.75	12.25; 13.00; AG 13.00	405
km/h															
10 FR	4675	4825	4970												
20 FR	4210	4340	4475												
30 FR	3740	3860	3975												
40 FR	3340	3445	3550												
50 FR	3005	3100	3150												
10 DW	3290	3395	3500												
20 DW	2960	3055	3150												
30 DW	2630	2715	2800												
40 DW	2350	2425	2500												
50 DW	2115	2185	2240												
500/45 - 22.5	AG 16.00	-	500	1045	471	3167	STD	12	TL	136 A8/132 B	148 A8/144 B				
												km/h			
												10 FR	4020	4215	4410
												20 FR	3615	3795	3970
												30 FR	3215	3370	3530
												40 FR	2870	3010	3150
												50 FR	2585	2710	2800
												10 DW	2855	2995	3135
												20 DW	2570	2695	2820
												30 DW	2285	2395	2510
												40 DW	2040	2140	2240
												50 DW	1835	1925	2000
												500/45 - 22.5	AG 16.00	-	500
km/h															
10 FR	4900	5075	5250												
20 FR	4410	4570	4725												
30 FR	3920	4060	4200												
40 FR	3500	3625	3750												
50 FR	3150	3265	3350												
10 DW	3465	3590	3710												
20 DW	3120	3230	3340												
30 DW	2770	2875	2970												
40 DW	2475	2565	2650												
50 DW	2230	2310	2360												

STD: Standard

Tolerances: O.D. ± 2% - S.W. ± 2% - RC ± 2.5%



MAIN APPLICATION:
FLOTATION



FLOTATION 648

FLOTATION 648 is particularly suitable for field and road transport as well as for spreading operations. Some sizes are designed for hay harvesters/balers. The special tread design allows for carrying very high loads at low pressure, guaranteeing at the same time reduced soil compaction and preventing damage to crops. FLOTATION 648 is also available as "HD" version for best cut and chip resistance and as "high speed" version to optimize transfer times.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	L.S.I. Free Rolling	L.S.I. Drive Wheel	LOAD CAPACITY (KG/TIRE)			
	Rec.	Alt.										↓			
17" 500/50 - 17	AG 16.00	-	510	945	416	2750	STD	10	TL	128 A8/124 B	140 A8/136 B	bar	1.50	1.70	2.00
												km/h			
												10 FR	2960	3185	3500
												20 FR	2665	2865	3150
												30 FR	2370	2550	2800
												40 FR	2115	2275	2500
												50 FR	1905	2050	2240
												10 DW	2130	2290	2520
												20 DW	1915	2060	2270
												30 DW	1700	1830	2015
												40 DW	1520	1635	1800
												50 DW	1370	1470	1600
												500/50 - 17	AG 16.00	-	510
km/h															
10 FR	3950	4160	4550												
20 FR	3555	3740	4095												
30 FR	3160	3325	3640												
40 FR	2820	2970	3250												
50 FR	2540	2675	2900												
10 DW	2795	2940	3220												
20 DW	2515	2645	2900												
30 DW	2235	2350	2575												
40 DW	1995	2100	2300												
50 DW	1795	1890	2060												
500/50 - 17	AG 16.00	-	510	945	416	2750	STD	16	TL	139 A8/135 B	152 A8/148 B				
												km/h			
												10 FR	4790	4880	4970
												20 FR	4310	4390	4475
												30 FR	3830	3905	3975
												40 FR	3420	3485	3550
												50 FR	3080	3135	3150
												10 DW	3275	3340	3400
												20 DW	2950	3005	3060
												30 DW	2620	2670	2720
												40 DW	2340	2385	2430
												50 DW	2105	2145	2180
												500/50 - 17	AG 16.00	-	510
km/h															
10 FR	5605	5690	5775												
20 FR	5045	5120	5200												
30 FR	4485	4555	4620												
40 FR	4005	4065	4125												
50 FR	3605	3660	3750												
10 DW	3940	3995	4060												
20 DW	3545	3595	3655												
30 DW	3155	3200	3250												
40 DW	2815	2855	2900												
50 DW	2535	2570	2575												

STD: Standard



MAIN APPLICATION:
FLOTATION



FLOTATION 648

FLOTATION 648 is particularly suitable for field and road transport as well as for spreading operations. Some sizes are designed for hay harvesters/balers. The special tread design allows for carrying very high loads at low pressure, guaranteeing at the same time reduced soil compaction and preventing damage to crops. FLOTATION 648 is also available as "HD" version for best cut and chip resistance and as "high speed" version to optimize transfer times.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	L.S.I. Free Rolling	L.S.I. Drive Wheel	LOAD CAPACITY (KG/TIRE)				
	Rec.	Alt.										↓				
20" 500/55 - 20	16.00	-	508	1058	458	3153	STD	12	TL	138 A8/134 B	150 A8/146 B	bar	2.00	2.20	2.40	
												km/h				
												10 FR	4215	4460	4690	
												20 FR	3795	4015	4220	
												30 FR	3370	3565	3750	
												40 FR	3010	3185	3350	
												50 FR	2710	2865	3000	
												10 DW	2970	3145	3305	
												20 DW	2670	2830	2975	
												30 DW	2375	2515	2645	
40 DW	2120	2245	2360													
50 DW	1910	2020	2120													
22.5" 350/65 - 22.5	AG 11.75	-	358	1030	451	3069	STD	18	TL	139 A8/135 B	151 A8/147 B	bar	2.00	3.00	4.00	5.00
												km/h				
												10 FR	2830	3585	4240	4830
												20 FR	2545	3225	3820	4345
												30 FR	2260	2865	3395	3865
												40 FR	2020	2560	3030	3450
												50 FR	1820	2305	2725	3075
												10 DW	1990	2520	2990	3400
												20 DW	1790	2270	2690	3060
												30 DW	1590	2015	2390	2720
40 DW	1420	1800	2135	2430												
50 DW	1280	1620	1920	2180												
400/60 - 22.5 (385/65 - 22.5)	AG 11.75	-	400	1070	475	3233	STD	16	TL	144 A8/140 B	156 A8/152 B	bar	1.50	2.50	3.50	
												km/h				
												10 FR	3410	4600	5600	
												20 FR	3070	4140	5040	
												30 FR	2725	3680	4480	
												40 FR	2435	3285	4000	
												50 FR	2190	2955	3550	
												10 DW	2385	3220	3920	
												20 DW	2150	2900	3530	
												30 DW	1910	2575	3135	
40 DW	1705	2300	2800													
50 DW	1535	2070	2500													
400/60 - 22.5 (385/65 - 22.5)	AG 11.75	-	400	1070	475	3233	STD	18	TL	148 A8/144 B	160 A8/ 156 B	bar	3.80	4.00	4.30	
												km/h				
												10 FR	5860	6040	6300	
												20 FR	5275	5435	5670	
												30 FR	4685	4835	5040	
												40 FR	4185	4315	4500	
												50 FR	3765	3885	4000	
												10 DW	4100	4230	4410	
												20 DW	3690	3805	3970	
												30 DW	3280	3380	3530	
40 DW	2930	3020	3150													
50 DW	2635	2720	2800													

STD: Standard

Tolerances: O.D. ± 2% - S.W. ± 2% - RC ± 2.5%



MAIN APPLICATION:
FLOTATION



FLOTATION 648

FLOTATION 648 is particularly suitable for field and road transport as well as for spreading operations. Some sizes are designed for hay harvesters/balers. The special tread design allows for carrying very high loads at low pressure, guaranteeing at the same time reduced soil compaction and preventing damage to crops. FLOTATION 648 is also available as "HD" version for best cut and chip resistance and as "high speed" version to optimize transfer times.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	L.S.I. Free Rolling	L.S.I. Drive Wheel	LOAD CAPACITY (KG/TIRE)			
	Rec.	Alt.										↓			
22.5" 500/50 - 22.5	AG 16.00	-	500	1070	475	3200	STD	12	TL	140 A8/136 B	152 A8/148 B	bar	1.50	2.00	2.20
												km/h			
												10 FR	3970	4695	4970
												20 FR	3570	4225	4475
												30 FR	3175	3760	3975
												40 FR	2835	3355	3550
												50 FR	2550	3020	3150
												10 DW	2800	3310	3500
												20 DW	2520	2980	3150
												30 DW	2240	2650	2800
												40 DW	2000	2365	2500
												50 DW	1800	2130	2240
												500/50 - 22.5	AG 16.00	-	500
km/h															
10 FR	5475	5710	5950												
20 FR	4925	5140	5355												
30 FR	4380	4570	4760												
40 FR	3910	4080	4250												
50 FR	3520	3670	3875												
10 DW	3865	4030	4200												
20 DW	3480	3630	3780												
30 DW	3090	3225	3360												
40 DW	3760	2880	3000												
50 DW	2485	2590	2650												
500/50 - 22.5	AG 16.00	-	500	1070	475	3200	STD	20	TL	151 A8/147 B	163 A8/159 B				
												km/h			
												10 FR	6400	6615	6825
												20 FR	5760	5955	6145
												30 FR	5120	5290	5460
												40 FR	4570	4725	4875
												50 FR	4115	4255	4375
												10 DW	4530	4685	4830
												20 DW	4075	4215	4345
												30 DW	3625	3745	3865
												40 DW	3235	3345	3450
												50 DW	2910	3010	3075
												500/60 - 22.5	AG 16.00	15.00; 17.00	500
km/h															
10 FR	4390	5195	5775												
20 FR	3950	4675	5200												
30 FR	3510	4155	4620												
40 FR	3135	3710	4125												
50 FR	2820	3340	3750												
10 DW	3085	3645	4060												
20 DW	2780	3280	3655												
30 DW	2470	2920	3250												
40 DW	2205	2605	2900												
50 DW	1985	2345	2650												

STD: Standard



MAIN APPLICATION:
FLOTATION



FLOTATION 648

FLOTATION 648 is particularly suitable for field and road transport as well as for spreading operations. Some sizes are designed for hay harvesters/balers. The special tread design allows for carrying very high loads at low pressure, guaranteeing at the same time reduced soil compaction and preventing damage to crops. FLOTATION 648 is also available as "HD" version for best cut and chip resistance and as "high speed" version to optimize transfer times.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	L.S.I. Free Rolling	L.S.I. Drive Wheel	LOAD CAPACITY (KG/TIRE)			
	Rec.	Alt.										↓			
22.5" 500/60 - 22.5	AG 16.00	15.00 ; 17.00	500	1170	510	3489	STD	16	TL	151 A8/148 B	163 A8/159 B	bar	2.80	3.00	3.20
												km/h			
												10 FR	6315	6575	6825
												20 FR	5685	5915	6145
												30 FR	5050	5260	5460
												40 FR	4510	4695	4875
												50 FR	4060	4225	4375
												10 DW	4465	4650	4830
												20 DW	4020	4185	4345
												30 DW	3575	3720	3865
												40 DW	3190	3320	3450
												50 DW	2870	2990	3150
500/60 - 22.5	AG 16.00	15.00 ; 17.00	500	1170	510	3489	STD	18	TL	153 A8/149 B	165 A8/161 B	bar	3.40	3.50	3.60
												km/h			
												10 FR	6970	7090	7210
												20 FR	6275	6380	6940
												30 FR	5580	5675	5770
												40 FR	4980	5065	5150
												50 FR	4480	4560	4625
												10 DW	4940	5025	5110
												20 DW	4450	4525	4600
												30 DW	3955	4020	4090
												40 DW	3530	3590	3650
												50 DW	3175	3230	3250
550/45 - 22.5	AG 16.00	-	550	1070	475	3203	STD	16	TL	147 A8/144 B	159 A8/156 B	bar	2.40	2.60	2.80
												km/h			
												10 FR	5600	5865	6125
												20 FR	5040	5280	5515
												30 FR	4480	4695	4900
												40 FR	4000	4190	4375
												50 FR	3600	3770	4000
												10 DW	3935	4125	4305
												20 DW	3540	3710	3875
												30 DW	3145	3300	3445
												40 DW	2810	2945	3075
												50 DW	2530	2650	2800
550/45 - 22.5	AG 16.00	-	550	1070	475	3203	STD	20	TL	154 A8/150 B	166 A8/162 B	bar	3.00	3.50	4.00
												km/h			
												10 FR	6270	6860	7420
												20 FR	5645	6175	6680
												30 FR	5020	5490	5935
												40 FR	4480	4900	5300
												50 FR	4030	4410	4750
												10 DW	4440	4860	5250
												20 DW	3995	4370	4725
												30 DW	3550	3885	4200
												40 DW	3170	3470	3750
												50 DW	2855	3125	3350

STD: Standard

Tolerances: O.D. ± 2% - S.W. ± 2% - RC ± 2.5%



MAIN APPLICATION:
FLOTATION



FLOTATION 648

FLOTATION 648 is particularly suitable for field and road transport as well as for spreading operations. Some sizes are designed for hay harvesters/balers. The special tread design allows for carrying very high loads at low pressure, guaranteeing at the same time reduced soil compaction and preventing damage to crops. FLOTATION 648 is also available as "HD" version for best cut and chip resistance and as "high speed" version to optimize transfer times.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	L.S.I. Free Rolling	L.S.I. Drive Wheel	LOAD CAPACITY (KG/TIRE)			
	Rec.	Alt.										↓			
22.5" 550/60 - 22.5	AG 16.00	-	550	1240	540	3725	STD	12	TL	148 A8/144 B	160 A8/156 B	bar	1.50	1.80	2.10
												km/h			
												10 FR	5175	5755	6300
												20 FR	4655	5180	5670
												30 FR	4140	4605	5040
												40 FR	3695	4110	4500
												50 FR	3325	3700	4000
												10 DW	3620	4030	4410
												20 DW	3255	3630	3970
												30 DW	2895	3225	3530
												40 DW	2585	2880	3150
												50 DW	2325	2590	2800
												550/60 - 22.5	AG 16.00	-	550
km/h															
10 FR	7820	7975	8120												
20 FR	7035	7175	7310												
30 FR	6255	6380	6495												
40 FR	5585	5695	5800												
50 FR	5025	5125	5150												
10 DW	5390	5495	5600												
20 DW	4850	4945	5040												
30 DW	4310	4395	4480												
40 DW	3850	3925	4000												
50 DW	3465	3535	3550												
550/60 - 22.5	AG 16.00	-	550	1240	540	3725	STD	20	TL	158 A8/154 B	171 A8/167 B				
												km/h			
												10 FR	8315	8465	8610
												20 FR	7485	7615	7750
												30 FR	6655	6770	6890
												40 FR	5940	6045	6150
												50 FR	5345	5440	5450
												10 DW	5745	5850	5950
												20 DW	5170	5265	5355
												30 DW	4600	4680	4760
												40 DW	4105	4180	4250
												50 DW	3625	3685	3750
												550/60 - 22.5	AG 16.00	-	550
km/h															
10 FR	8315	8465	8610												
20 FR	7485	7615	7750												
30 FR	6655	6770	6890												
40 FR	5940	6045	6150												
50 FR	5345	5440	5450												
10 DW	5745	5850	5950												
20 DW	5170	5265	5355												
30 DW	4600	4680	4760												
40 DW	4105	4180	4250												
50 DW	3625	3685	3750												

STD: Standard
DB: Dual bead version



MAIN APPLICATION:
FLOTATION



FLOTATION 648

FLOTATION 648 is particularly suitable for field and road transport as well as for spreading operations. Some sizes are designed for hay harvesters/balers. The special tread design allows for carrying very high loads at low pressure, guaranteeing at the same time reduced soil compaction and preventing damage to crops. FLOTATION 648 is also available as "HD" version for best cut and chip resistance and as "high speed" version to optimize transfer times.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	L.S.I. Free Rolling	L.S.I. Drive Wheel	LOAD CAPACITY (KG/TIRE)			
	Rec.	Alt.										↓			
22.5" 600/50 - 22.5	AG 20.00	-	600	1170	510	3501	STD	12	TL	147 A8/144 B	159 A8/156 B	bar	1.50	1.70	2.00
												km/h			
												10 FR	5175	5570	6125
												20 FR	4655	5015	5515
												30 FR	4140	4460	4900
												40 FR	3695	3980	4375
												50 FR	3325	3580	4000
												10 DW	3640	3915	4305
												20 DW	3275	3520	3875
												30 DW	2910	3130	3445
												40 DW	2600	2795	3075
												50 DW	2340	2515	2800
												600/50 - 22.5	AG 20.00	-	600
km/h															
10 FR	6540	6880	7210												
20 FR	5885	6195	6490												
30 FR	5230	5505	5770												
40 FR	4670	4915	5150												
50 FR	4205	4425	4625												
10 DW	4635	4880	5110												
20 DW	4170	4390	4600												
30 DW	3705	3905	4090												
40 DW	3310	3485	3650												
50 DW	2980	3135	3250												
600/50 - 22.5	AG 20.00	-	600	1170	510	3501	STD	18	TL	155 A8/151 B	167 A8/163 B				
												km/h			
												10 FR	7315	7475	7630
												20 FR	6585	6730	6865
												30 FR	5850	5980	6105
												40 FR	5225	5340	5450
												50 FR	4705	4805	4875
												10 DW	5200	5315	5425
												20 DW	4680	4780	4885
												30 DW	4160	4250	4340
												40 DW	3715	3795	3875
												50 DW	3345	3415	3450
												600/50 - 22.5	AG 20.00	-	600
km/h															
10 FR	7820	7975	8120												
20 FR	7035	7175	7310												
30 FR	6255	6380	6495												
40 FR	5585	5695	5800												
50 FR	5025	5125	5150												
10 DW	5390	5495	5600												
20 DW	4850	4945	5040												
30 DW	4310	4395	4480												
40 DW	3850	3925	4000												
50 DW	3465	3535	3550												

STD: Standard
DB: Dual bead version

Tolerances: O.D. ± 2% - S.W. ± 2% - RC ± 2.5%



MAIN APPLICATION:
FLOTATION



FLOTATION 648

FLOTATION 648 is particularly suitable for field and road transport as well as for spreading operations. Some sizes are designed for hay harvesters/balers. The special tread design allows for carrying very high loads at low pressure, guaranteeing at the same time reduced soil compaction and preventing damage to crops. FLOTATION 648 is also available as "HD" version for best cut and chip resistance and as "high speed" version to optimize transfer times.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	L.S.I. Free Rolling	L.S.I. Drive Wheel	LOAD CAPACITY (KG/TIRE)			
	Rec.	Alt.										↓			
22.5" 600/55 - 22.5	AG 20.00	-	600	1230	540	3716	STD	12	TL	151 A8/ 148 B	164 A8/160 B	bar	1.50	1.70	2.00
												km/h			
												10 FR	5915	6365	7000
												20 FR	5325	5725	6300
												30 FR	4730	5090	5600
												40 FR	4225	4545	5000
												50 FR	3805	4090	4500
												10 DW	4080	4390	4830
												20 DW	3675	3950	4345
												30 DW	3265	3510	3865
												40 DW	2915	3135	3450
												50 DW	2625	2820	3150
												600/55 - 22.5	AG 20.00	-	600
km/h															
10 FR	7365	7750	8120												
20 FR	6630	6975	7310												
30 FR	5890	6200	6495												
40 FR	5260	5535	5800												
50 FR	4735	4980	5300												
10 DW	5080	5340	5600												
20 DW	4575	4805	5040												
30 DW	4065	4275	4480												
40 DW	3630	3815	4000												
50 DW	3265	3435	3650												
600/55 - 22.5	AG 20.00	-	600	1230	540	3716	DB	20	TL	160 A8/156 B	173 A8/169 B				
												km/h			
												10 FR	8765	8930	9100
												20 FR	7890	8040	8190
												30 FR	7010	7145	7280
												40 FR	6260	6380	6500
												50 FR	5635	5740	5800
												10 DW	6070	6180	6300
												20 DW	5460	5565	5670
												30 DW	4855	4945	5040
												40 DW	4335	4415	4500
												50 DW	3900	3975	4000
												700/40 - 22.5	AG 24.00	-	700
km/h															
10 FR	5850	6085	6300												
20 FR	5265	5475	5670												
30 FR	4680	4865	5040												
40 FR	4180	4345	4500												
50 FR	3760	3910	4125												
10 DW	4100	4255	4410												
20 DW	3690	3830	3970												
30 DW	3280	3405	3530												
40 DW	2930	3040	3150												
50 DW	2635	2735	2800												

STD: Standard
DB: Dual bead version



MAIN APPLICATION:
FLOTATION



FLOTATION 648

FLOTATION 648 is particularly suitable for field and road transport as well as for spreading operations. Some sizes are designed for hay harvesters/balers. The special tread design allows for carrying very high loads at low pressure, guaranteeing at the same time reduced soil compaction and preventing damage to crops. FLOTATION 648 is also available as "HD" version for best cut and chip resistance and as "high speed" version to optimize transfer times.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	L.S.I. Free Rolling	L.S.I. Drive Wheel	LOAD CAPACITY (KG/TIRE)			
	Rec.	Alt.										↓			
22.5" 700/40 - 22.5	AG 24.00	-	700	1170	510	3537	STD	16	TL	154 A8/150 B	166 A8/ 162 B	bar	1.80	2.00	2.20
												km/h			
												10 FR	6600	7020	7420
												20 FR	5940	6320	6680
												30 FR	5280	5615	5935
												40 FR	4715	5015	5300
												50 FR	4245	4515	4750
												10 DW	4670	4965	5250
												20 DW	4200	4465	4725
												30 DW	3735	3970	4200
												40 DW	3335	3545	3750
												50 DW	3000	3190	3350
												700/40 - 22.5	AG 24.00	-	700
km/h															
10 FR	7470	7660	7840												
20 FR	6720	6890	7055												
30 FR	5975	6125	6270												
40 FR	5335	5470	5600												
50 FR	4800	4925	5000												
10 DW	5165	5300	5425												
20 DW	4650	4770	4885												
30 DW	4135	4240	4340												
40 DW	3690	3785	3875												
50 DW	3320	3405	3450												
700/40 - 22.5	AG 24.00	-	700	1170	510	3537	HD	18	TL	158 A8/155 B	168 A8/164 B				
												km/h			
												10 FR	7470	7660	7840
												20 FR	6720	6890	7055
												30 FR	5975	6125	6270
												40 FR	5335	5470	5600
												50 FR	4800	4925	5000
												10 DW	5165	5300	5425
												20 DW	4650	4770	4885
												30 DW	4135	4240	4340
												40 DW	3690	3785	3875
												50 DW	3320	3405	3450
												700/50 - 22.5	24.00	-	700
km/h															
10 FR	7050	7315	7840												
20 FR	6345	6585	7055												
30 FR	5640	5850	6270												
40 FR	5035	5225	5600												
50 FR	4530	4705	5000												
10 DW	5035	5230	5600												
20 DW	4530	4705	5040												
30 DW	4025	4185	4480												
40 DW	3595	3735	4000												
50 DW	3235	3360	3650												

STD: Standard
HD: Heavy Duty Version ①

Tolerances: O.D. ± 2% - S.W. ± 2% - RC ± 2.5%



MAIN APPLICATION:
FLOTATION



FLOTATION 648

FLOTATION 648 is particularly suitable for field and road transport as well as for spreading operations. Some sizes are designed for hay harvesters/balers. The special tread design allows for carrying very high loads at low pressure, guaranteeing at the same time reduced soil compaction and preventing damage to crops. FLOTATION 648 is also available as "HD" version for best cut and chip resistance and as "high speed" version to optimize transfer times.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	L.S.I. Free Rolling	L.S.I. Drive Wheel	LOAD CAPACITY (KG/TIRE)															
	Rec.	Alt.										↓															
22.5" 700/50 - 22.5	24.00	-	700	1270	550	3775	STD	16	TL	162 A8/158 B	174 A8/170 B	bar	2.00	2.20	2.40												
												km/h															
												10 FR	8430	8910	9380												
												20 FR	7585	8020	8440												
												30 FR	6740	7130	7505												
												40 FR	6020	6365	6700												
												50 FR	5420	5730	6000												
												10 DW	5980	6320	6650												
												20 DW	5380	5690	5985												
												30 DW	4780	5055	5320												
												40 DW	4270	4515	4750												
												50 DW	3845	4065	4250												
												700/50 - 22.5	24.00	-	700	1270	550	3775	HS	16	TL	158 B/154 E	170 B/166 E	bar	2.00	2.20	2.40
																								km/h			
10 FR	8430	8910	9380																								
20 FR	7585	8020	8440																								
30 FR	6740	7130	7505																								
40 FR	6020	6365	6700																								
50 FR	5420	5730	6000																								
70 FR	4755	5030	5300																								
10 DW	5980	6320	6650																								
20 DW	5380	5690	5985																								
30 DW	4780	5055	5320																								
40 DW	4270	4515	4750																								
50 DW	3845	4065	4250																								
70 DW	3375	3565	3750																								
26.5" 600/55 - 26.5	AG 20.00	-	600	1354	581	4017	STD	12	TL	153 A8/149 B	165 A8/161 B	bar	1.50	1.80	2.00												
												km/h															
												10 FR	6090	6775	7210												
												20 FR	5480	6100	6490												
												30 FR	4870	5420	5770												
												40 FR	4350	4840	5150												
												50 FR	3915	4355	4625												
												10 DW	4320	4800	5110												
												20 DW	3885	4320	4600												
												30 DW	3455	3840	4090												
												40 DW	3085	3430	3650												
												50 DW	2775	3085	3250												

STD: Standard
HS: High Speed Version ②



MAIN APPLICATION:
FLOTATION



FLOTATION 648

FLOTATION 648 is particularly suitable for field and road transport as well as for spreading operations. Some sizes are designed for hay harvesters/balers. The special tread design allows for carrying very high loads at low pressure, guaranteeing at the same time reduced soil compaction and preventing damage to crops. FLOTATION 648 is also available as "HD" version for best cut and chip resistance and as "high speed" version to optimize transfer times.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	L.S.I. Free Rolling	L.S.I. Drive Wheel	LOAD CAPACITY (KG/TIRE)			
	Rec.	Alt.										↓			
26.5" 600/55 - 26.5	AG 20.00	-	600	1354	581	4017	STD	16	TL	159 A8/156 B	170 A8/167 B	bar	2.20	2.40	2.60
												km/h			
												10 FR	7615	8015	8400
												20 FR	6855	7215	7560
												30 FR	6095	6410	6720
												40 FR	5440	5725	6000
												50 FR	4895	5155	5450
												10 DW	5560	5845	6125
												20 DW	5000	5260	5515
												30 DW	4445	4675	4900
												40 DW	3970	4175	4375
												50 DW	3575	3760	4000
												600/55 - 26.5	AG 20.00	-	600
km/h															
10 FR	8455	8640	8820												
20 FR	7610	7775	7940												
30 FR	6765	6910	7055												
40 FR	6040	6170	6300												
50 FR	5435	5555	5800												
10 DW	6040	6175	6300												
20 DW	5435	5555	5670												
30 DW	4835	4940	5040												
40 DW	4315	4410	4500												
50 DW	3885	3970	4125												
700/50 - 26.5	24.00	-	700	1354	581	4017	STD	12	TL	157 A8/154 B	169 A8/165 B				
												km/h			
												10 FR	7300	7580	8120
												20 FR	6570	6825	7310
												30 FR	5840	6065	6495
												40 FR	5215	5415	5800
												50 FR	4695	4875	5150
												10 DW	5195	5390	5775
												20 DW	4675	4850	5200
												30 DW	4155	4310	4620
												40 DW	3710	3850	4125
												50 DW	3340	3465	3750
												700/50 - 26.5	24.00	-	700
km/h															
10 FR	8430	8910	9380												
20 FR	7585	8020	8440												
30 FR	6740	7130	7505												
40 FR	6020	6365	6700												
50 FR	5420	5730	6000												
10 DW	5980	6320	6650												
20 DW	5380	5690	5985												
30 DW	4780	5055	5320												
40 DW	4270	4515	4750												
50 DW	3845	4065	4250												

STD: Standard

Tolerances: O.D. ± 2% - S.W. ± 2% - RC ± 2.5%



MAIN APPLICATION:
FLOTATION



FLOTATION 648

FLOTATION 648 is particularly suitable for field and road transport as well as for spreading operations. Some sizes are designed for hay harvesters/balers. The special tread design allows for carrying very high loads at low pressure, guaranteeing at the same time reduced soil compaction and preventing damage to crops. FLOTATION 648 is also available as "HD" version for best cut and chip resistance and as "high speed" version to optimize transfer times.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	L.S.I. Free Rolling	L.S.I. Drive Wheel	LOAD CAPACITY (KG/TIRE)			
	Rec.	Alt.										↓			
26.5" 800/45 - 26.5	AG 28.00	-	800	1354	581	4017	STD	12	TL	158 A8/155 B	170 A8/167 B	bar	1.50	1.60	1.70
												km/h			
												10 FR	7805	8105	8400
												20 FR	7025	7295	7560
												30 FR	6245	6485	6720
												40 FR	5575	5790	6000
												50 FR	5020	5210	5450
												10 DW	5530	5740	5950
												20 DW	4975	5165	5355
												30 DW	4425	4590	4760
												40 DW	3950	4100	4250
												50 DW	3555	3690	3875
												bar	1.80	2.00	2.20
												km/h			
10 FR	9085	9665	10220												
20 FR	8175	8700	9200												
30 FR	7270	7735	8175												
40 FR	6490	6905	7300												
50 FR	5840	6215	6500												
10 DW	6225	6620	7000												
20 DW	5600	5960	6300												
30 DW	4980	5300	5600												
40 DW	4445	4730	5000												
50 DW	4000	4225	4500												
30.5" 650/65 - 30.5	AG 20.00	-	650	1650	710	4935	STD	12	TL	162 A8/158 B	174 A8/170 B	bar	1.50	1.60	1.70
												km/h			
												10 FR	8715	9050	9380
												20 FR	7845	8145	8440
												30 FR	6970	7240	7505
												40 FR	6225	6465	6700
												50 FR	5605	5820	6000
												10 DW	6180	6420	6650
												20 DW	5565	5775	5985
												30 DW	4945	5135	5320
												40 DW	4415	4585	4750
												50 DW	3975	4125	4250
												bar	1.80	2.00	2.20
												km/h			
10 FR	9645	10260	10850												
20 FR	8680	9235	9765												
30 FR	7715	8210	8680												
40 FR	6890	7330	7750												
50 FR	6200	6595	6900												
10 DW	6785	7215	7630												
20 DW	6105	6495	6865												
30 DW	5425	5775	6105												
40 DW	4845	5155	5450												
50 DW	4360	4640	4875												

STD: Standard



MAIN APPLICATION:
FLOTATION



FLOTATION 648

FLOTATION 648 is particularly suitable for field and road transport as well as for spreading operations. Some sizes are designed for hay harvesters/balers. The special tread design allows for carrying very high loads at low pressure, guaranteeing at the same time reduced soil compaction and preventing damage to crops. FLOTATION 648 is also available as "HD" version for best cut and chip resistance and as "high speed" version to optimize transfer times.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	L.S.I. Free Rolling	L.S.I. Drive Wheel	LOAD CAPACITY (KG/TIRE)			
	Rec.	Alt.										↓			
30.5" 650/65 - 30.5	AG 20.00	-	650	1650	710	4935	HD	16	TL	167 A8/163 B	179 A8/175 B	bar	1.80	2.00	2.20
												km/h			
												10 FR	9645	10260	10850
												20 FR	8680	9235	9765
												30 FR	7715	8210	8680
												40 FR	6890	7330	7750
												50 FR	6200	6595	6900
												10 DW	6785	7215	7630
												20 DW	6105	6495	6865
												30 DW	5425	5775	6105
												40 DW	4845	5155	5450
												50 DW	4360	4640	4875
												650/65 - 30.5	AG 20.00	-	650
km/h															
10 FR	10995	11275	11550												
20 FR	9895	10150	10395												
30 FR	8800	9020	9240												
40 FR	7855	8055	8250												
50 FR	7070	7250	7500												
10 DW	7735	7930	8120												
20 DW	6960	7140	7310												
30 DW	6190	6345	6495												
40 DW	5525	5665	5800												
50 DW	4975	5100	5150												
750/60 - 30.5	AG 24.00	-	750	1650	710	4935	STD	12	TL	164 A8/160 B	176 A8/172 B				
												km/h			
												10 FR	9240	9595	9940
												20 FR	8315	8635	8945
												30 FR	7390	7680	7950
												40 FR	6600	6855	7100
												50 FR	5940	6170	6300
												10 DW	6505	6755	7000
												20 DW	5855	6080	6300
												30 DW	5200	5405	5600
												40 DW	4645	4825	5000
												50 DW	4180	4345	4500
												750/60 - 30.5	AG 24.00	-	750
km/h															
10 FR	10585	11255	11900												
20 FR	9525	10130	10710												
30 FR	8465	9005	9520												
40 FR	7560	8040	8500												
50 FR	6805	7235	7750												
10 DW	7470	7945	8400												
20 DW	6720	7150	7560												
30 DW	5975	6355	6720												
40 DW	5335	5675	6000												
50 DW	4800	5110	5450												

STD: Standard
HD: Heavy Duty Version ①

Tolerances: O.D. ± 2% - S.W. ± 2% - RC ± 2.5%



MAIN APPLICATION:
FLOTATION



FLOTATION 648

FLOTATION 648 is particularly suitable for field and road transport as well as for spreading operations. Some sizes are designed for hay harvesters/balers. The special tread design allows for carrying very high loads at low pressure, guaranteeing at the same time reduced soil compaction and preventing damage to crops. FLOTATION 648 is also available as "HD" version for best cut and chip resistance and as "high speed" version to optimize transfer times.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	L.S.I. Free Rolling	L.S.I. Drive Wheel	LOAD CAPACITY (KG/TIRE)			
	Rec.	Alt.										↓			
850/50 - 30.5	AG 28.00	-	850	1650	710	4935	STD	12	TL	168 A8/164 B	180 A8/176 B	bar	1.10	1.30	1.50
												km/h			
												10 FR	9345	10305	11200
												20 FR	8410	9275	10080
												30 FR	7475	8245	8960
												40 FR	6675	7360	8000
												50 FR	6010	6625	7100
												10 DW	6540	7210	7840
												20 DW	5885	6490	7055
												30 DW	5230	5770	6270
												40 DW	4670	5150	5600
												50 DW	4205	4635	5000
												850/50 - 30.5	AG 28.00	-	850
km/h															
10 FR	11830	12580	13300												
20 FR	10645	11320	11970												
30 FR	9465	10065	10640												
40 FR	8450	8985	9500												
50 FR	7605	8085	8500												
10 DW	8345	8870	9380												
20 DW	7510	7980	8440												
30 DW	6675	7095	7505												
40 DW	5960	6335	6700												
50 DW	5365	5700	6000												
850/50 - 30.5	AG 28.00	-	850	1650	710	4935	HD	16	TL	174 A8/170 B	186 A8/182 B				
												km/h			
												10 FR	11830	12580	13300
												20 FR	10645	11320	11970
												30 FR	9465	10065	10640
												40 FR	8450	8985	9500
												50 FR	7605	8085	8500
												10 DW	8345	8870	9380
												20 DW	7510	7980	8440
												30 DW	6675	7095	7505
												40 DW	5960	6335	6700
												50 DW	5365	5700	6000
												850/50 - 30.5	AG 28.00	-	850
km/h															
10 FR	13735	14075	14420												
20 FR	12360	12670	12980												
30 FR	10985	11260	11535												
40 FR	9810	10055	10300												
50 FR	8830	9050	9250												
10 DW	9465	9700	9940												
20 DW	8520	8730	8945												
30 DW	7570	7760	7950												
40 DW	6760	6930	7100												
50 DW	6085	6235	6500												

STD: Standard
HD: Heavy Duty Version ①



MAIN APPLICATION:
FLOTATION



FLOTATION 648 T

FLOTATION 648 T is particularly suitable for field and road transport as well as for hay harvesting. Its tread design allows for carrying very high loads at low pressure and ensures outstanding self-cleaning properties. In line with BKT's commitment to provide products supporting the farming business, FLOTATION 648 T maximizes your yield and takes care of the land.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	L.S.I. Free Rolling	L.S.I. Drive Wheel	LOAD CAPACITY (KG/TIRE)				
	Rec.	Alt.										↓				
												bar	3.00	3.50	4.00	
22.5" 550/45 - 22.5	AG 16.00	-	550	1070	475	3203	STD	20	TL	154 A8/150 B	166 A8/162 B	mph				
												10 FR	6270	6860	7420	
												20 FR	5645	6175	6680	
												30 FR	5020	5490	5935	
												40 FR	4480	4900	5300	
												50 FR	4030	4410	4750	
												10 DW	4440	4860	5250	
												20 DW	3995	4370	4725	
												30 DW	3550	3885	4200	
												40 DW	3170	3470	3750	
												50 DW	2855	3125	3350	

STD: Standard



MAIN APPLICATION:
FLOTATION



FLOTATION TR 675

FLOTATION TR 675 is best suited for soil tillage operations and transport. It fits trailers, compact dumpers and implement machinery. FLOTATION TR 675 has been engineered to provide outstanding traction remaining gentle on the ground to prevent crop damages.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	L.S.I. Free Rolling	L.S.I. Drive Wheel	LOAD CAPACITY (KG/TIRE)			
	Rec.	Alt.										↓			
22.5" 500/60 - 22.5	AG 16.00	15.00; 17.00	500	1181	534	3505	STD	12	TL	145 A6/142 A8	157 A8/154 B	bar	1.50	2.00	2.40
												km/h			
												10 FR	4390	5195	5775
												20 FR	3950	4675	5200
												30 FR	3510	4155	4620
												40 FR	3135	3710	4125
												50 FR	2820	3340	3750
												10 DW	3085	3645	4060
												20 DW	2780	3280	3655
												30 DW	2470	2920	3250
												40 DW	2205	2605	2900
												50 DW	1985	2345	2650
												500/60 - 22.5	AG 16.00	15.00; 17.00	500
km/h															
10 FR	6315	6575	6825												
20 FR	5685	5915	6145												
30 FR	5050	5260	5460												
40 FR	4510	4695	4875												
50 FR	4060	4225	4375												
10 DW	4465	4650	4830												
20 DW	4020	4185	4345												
30 DW	3575	3720	3865												
40 DW	3190	3320	3450												
50 DW	2870	2990	3150												
550/60 - 22.5	AG 16.00	-	550	1260	547	3640	STD	12	TL	148 A8/144 B	160 A8/156 B				
												km/h			
												10 FR	5175	5755	6300
												20 FR	4655	5180	5670
												30 FR	4140	4605	5040
												40 FR	3695	4110	4500
												50 FR	3325	3700	4000
												10 DW	3620	4030	4410
												20 DW	3255	3630	3970
												30 DW	2895	3225	3530
												40 DW	2585	2880	3150
												50 DW	2325	2590	2800
												550/60 - 22.5	AG 16.00	-	550
km/h															
10 FR	6970	7310	7630												
20 FR	6275	6575	6865												
30 FR	5580	5845	6105												
40 FR	4980	5220	5450												
50 FR	4480	4700	4875												
10 DW	4795	5025	5250												
20 DW	4315	4525	4725												
30 DW	3835	4020	4200												
40 DW	3425	3590	3750												
50 DW	3085	3230	3350												

STD: Standard



MAIN APPLICATION:
FLOTATION



FLOTATION RIB 774

FLOTATION RIB 774 is suitable in all free-rolling applications and ideal for trailers and implement machinery. It has been designed to provide best handling comfort optimizing the timing of operations as well as farmers' productivity.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	L.S.I. Free Rolling	L.S.I. Drive Wheel	LOAD CAPACITY (KG/TIRE)			
	Rec.	Alt.										↓			
22.5" 550/60 - 22.5	AG 16.00	-	550	1240	540	3725	STD	12	TL	148 A8/144 B	160 A8/156 B	bar	1.50	1.80	2.10
												km/h			
												10 FR	5175	5755	6300
												20 FR	4655	5180	5670
												30 FR	4140	4605	5040
												40 FR	3695	4110	4500
												50 FR	3325	3700	4000
												10 DW	3620	4030	4410
												20 DW	3255	3630	3970
												30 DW	2895	3225	3530
												40 DW	2585	2880	3150
												50 DW	2325	2590	2800
												550/60 - 22.5	AG 16.00	-	550
km/h															
10 FR	6970	7310	7630												
20 FR	6275	6575	6865												
30 FR	5580	5845	6105												
40 FR	4980	5220	5450												
50 FR	4480	4700	4875												
10 DW	4795	5025	5250												
20 DW	4315	4525	4725												
30 DW	3835	4020	4200												
40 DW	3425	3590	3750												
50 DW	3085	3230	3350												
600/55 - 22.5	AG 20.00	-	600	1230	540	3716	STD	12	TL	151 A8/ 148 B	164 A8/160 B				
												km/h			
												10 FR	5915	6365	7000
												20 FR	5325	5725	6300
												30 FR	4730	5090	5600
												40 FR	4225	4545	5000
												50 FR	3805	4090	4500
												10 DW	4080	4390	4830
												20 DW	3675	3950	4345
												30 DW	3265	3510	3865
												40 DW	2915	3135	3450
												50 DW	2625	2820	3150
												600/55 - 22.5	AG 20.00	-	600
km/h															
10 FR	7365	7750	8120												
20 FR	6630	6975	7310												
30 FR	5890	6200	6495												
40 FR	5260	5535	5800												
50 FR	4735	4980	5300												
10 DW	5080	5340	5600												
20 DW	4575	4805	5040												
30 DW	4065	4275	4480												
40 DW	3630	3815	4000												
50 DW	3265	3435	3650												

STD: Standard

Tolerances: O.D. ± 2% - S.W. ± 2% - RC ± 2.5%



MAIN APPLICATION:
FORESTRY



FORESTECH (LS-2)

FORESTECH is a BKT bias steel-belted tire, suitable for forestry applications with forwarders. It provides excellent traction even in heavy-duty service. The strong bead and shoulder area ensure high puncture resistance as well as a longer tire life-cycle. As a result, you can deal with the most difficult operating conditions in a forest without concern.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)	
	Rec.	Alt.									bar	km/h
26.5" 600/55 - 26.5	AG 20.00	-	610	1335	618	4032	SB	20	TL	165 A8/172 A2	bar	5.00
											km/h	
											40	5150
											30	5510
											10	6300
710/45 - 26.5	AG 24.00	-	710	1340	620	4047	SB	20	TL	168 A8/175 A2	bar	5.00
											km/h	
											40	5600
											30	5990
											10	6900
750/55 - 26.5	DW 23 B	DW 25 B	755	1485	680	4467	SB	20	TL	177 A8/184 A2	bar	73 5.00
											km/h	
											40	7300
											30	7810
											10	9000

SB: Steel belted version



MAIN APPLICATION:
FORESTRY



FS 216 (LS-2)

FS 216 has a robust lug design with optimum angle and wider width to enhance traction performance for loggers and skidders. It provides excellent cut and chip resistance under the most critical operating conditions and ensures maximum protection against possible damages at any time.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)		
	Rec.	Alt.									↓		
26" 18.4 - 26	DW 16 A	-	467	1476	682	4433	AB	10	TT	-	bar	2.10	1.70
											km/h		
											10	3600	-
											30	-	2575
18.4 - 26	DW 16 A	-	467	1476	682	4433	SB	10	TT	-	bar	2.10	1.70
											km/h		
											10	3600	-
											30	-	2575
23.1 - 26	DW 20 A; DW 20 B	-	587	1615	726	4780	AB	10	TT	-	bar	1.70	1.40
											km/h		
											10	4540	-
											30	-	3250
23.1 - 26	DW 20 A; DW 20 B	-	587	1615	726	4780	SB	10	TT	-	bar	1.70	1.40
											km/h		
											10	4540	-
											30	-	3250
23.1 - 26	DW 20 A; DW 20 B	-	587	1615	726	4780	AB	12	TT	-	bar	2.10	1.70
											km/h		
											10	5260	-
											30	-	3750
23.1 - 26	DW 20 A; DW 20 B	-	587	1615	726	4780	SB	12	TT	-	bar	2.10	1.70
											km/h		
											10	5260	-
											30	-	3750
23.1 - 26	DW 20 A; DW 20 B	-	587	1615	726	4780	AB	14	TT	-	bar	2.40	2.10
											km/h		
											10	5760	-
											30	-	4125
23.1 - 26	DW 20 A; DW 20 B	-	587	1615	726	4780	SB	14	TT	-	bar	2.40	2.10
											km/h		
											10	5760	-
											30	-	4125
23.1 - 26	DW 20 A; DW 20 B	-	587	1615	726	4780	AB	16	TT	-	bar	2.80	2.40
											km/h		
											10	6300	-
											30	-	4500

AB: Aramid Belted Version ①
SB: Steel Belted Version ②



MAIN APPLICATION:
FORESTRY



FS 216 (LS-2)

FS 216 has a robust lug design with optimum angle and wider width to enhance traction performance for loggers and skidders. It provides excellent cut and chip resistance under the most critical operating conditions and ensures maximum protection against possible damages at any time.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)			
	Rec.	Alt.									bar	km/h	30	
26"	23.1 - 26	DW 20 A; DW 20 B	-	587	1615	726	4780	SB	16	TT	-	bar	2.80	2.40
												km/h	6300	-
												30	-	4500
23.1 - 26	DW 20 A; DW 20 B	-	587	1615	726	4780	SB	16	TL	-	bar	2.80	2.40	
											km/h	6300	-	
											30	-	4500	
23.1 - 26	DW 20 A; DW 20 B	-	587	1615	726	4780	SB	16	TT	-	bar	2.80	2.40	
											km/h	6300	-	
											30	-	4500	
28L - 26	DW 25 A; DW 25 B	-	720	1660	742	4912	SB	14	TL	-	bar	2.10	1.70	
											km/h	5940	-	
											30	-	4250	
28L - 26	DW 25 A; DW 25 B	-	720	1660	742	4912	SB	18	TL	-	bar	2.80	2.40	
											km/h	7100	-	
											30	-	5150	
30"	18.4 - 30	DW 16 A	-	467	1577	724	4736	AB	10	TT	-	bar	2.10	1.70
												km/h	3820	-
												30	-	2725
18.4 - 30	DW 16 A	-	467	1577	724	4736	SB	10	TT	-	bar	2.10	1.70	
											km/h	3820	-	
											30	-	2725	
18.4 - 30	DW 16 A	-	467	1577	724	4736	SB	14	TT	-	bar	2.80	2.40	
											km/h	4750	-	
											30	-	3350	

AB: Aramid Belted Version ①
SB: Steel Belted Version ②



MAIN APPLICATION:
FORESTRY



FS 216 (LS-2)

FS 216 has a robust lug design with optimum angle and wider width to enhance traction performance for loggers and skidders. It provides excellent cut and chip resistance under the most critical operating conditions and ensures maximum protection against possible damages at any time.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)		
	Rec.	Alt.									↓		
32" 24.5 - 32	DH 21	DH 21 B	622	1831	836	5456	SB	16	TL	-	bar	2.40	2.10
											km/h	7000	-
											10	-	5000
											30	-	-
30.5L - 32	DH 27	DH 27 B	775	1847	833	5466	AB	16	TL	-	bar	2.10	1.70
											km/h	7450	-
											10	-	5300
											30	-	-
30.5L - 32	DH 27	DH 27 B	775	1847	833	5466	SB	16	TL	-	bar	2.10	1.70
											km/h	7450	-
											10	-	5300
											30	-	-
30.5L - 32	DH 27	DH 27 B	775	1847	833	5466	SB	20	TL	-	bar	2.40	2.10
											km/h	8400	-
											10	-	6000
											30	-	-
DH 35.5L - 32	DH 31	DH 31 H	907	2011	912	5992	STD	20	TL	-	bar	1.70	2.10
											km/h	-	10200
											10	-	-
											30	7300	-
34" 18.4 - 34	DW 16 A	-	467	1679	768	5042	AB	10	TT	-	bar	2.10	1.70
											km/h	4060	-
											10	-	2900
											30	-	-
18.4 - 34	DW 16 A	-	467	1679	768	5042	SB	10	TT	-	bar	2.10	1.70
											km/h	4060	-
											10	-	2900
											30	-	-
18.4 - 34	DW 16 A	-	467	1679	768	5042	AB	14	TL	-	bar	2.80	2.40
											km/h	4875	-
											10	-	3550
											30	-	-
18.4 - 34	DW 16 A	-	467	1679	768	5042	SB	14	TL	-	bar	2.80	2.40
											km/h	4875	-
											10	-	3550
											30	-	-

AB: Aramid Belted Version ①
SB: Steel Belted Version ②
STD: Standard



**MAIN APPLICATION:
FORESTRY**



TR 678 (LS-2)

TR 678 is suitable for digging and loading operations. Its "steel-belted" version is suitable for harvesting in forestry applications. This tire ensures good traction and excellent self-cleaning properties, in addition to best cut and chip resistance resulting in reduced machinery downtime and increased productivity.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)	
	Rec.	Alt.									bar	km/h
15.5" 280/60 - 15.5	8.0	-	275	750	357	2250	STD	-	TL	115 A8	bar	2.90
											km/h	1215
											40	
22.5" 650/45 - 22.5	20.0	-	650	1150	502	3302	STD	-	TL	160 D	bar	4.00
											km/h	4875
											50	
											bar	4.50
											km/h	5300
											50	
650/45 - 22.5	20.0	-	650	1150	502	3302	STD	20	TL	166 B	bar	4.50
											km/h	5300
											50	
											bar	4.50
											km/h	5300
											50	
34" 600/65 - 34	DW 20 B	-	610	1644	758	4916	SB	14	TL	164 A2/160 A6	bar	2.40
											km/h	4500
											30	5000
											10	
											bar	2.40
											km/h	4875
700/55 - 34	DW 24 B	-	700	1640	757	4890	SB	14	TL	168 A2/163 A6	bar	2.40
											km/h	4875
											30	5600
											10	

STD: Standard
SB: Steel Belted Version ①



MAIN APPLICATION:
MULTIUSE



MULTIMAX MP 513 (R-1)

MULTIMAX MP 513 has been designed by BKT for multi-purpose vehicles in municipality/maintenance applications. Thanks to the strong steel-belted nylon casing, MULTIMAX MP 513 allows to carry heavy loads at high speeds. Its reinforced bead ensures a longer service life and extra mileage to enhance productivity.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)						
		Rec.	Alt.							↓						
17" 425/55 R 17	134 G	13	13.00	421	900	399	2645	-	STD	bar	1.6	2.0	2.5	3.0	3.5	
										km/h						
										90	1080	1280	1550	1830	2120	
										65	1175	1390	1685	1990	2305	
40	1245	1475	1785	2105	2440											
20" 405/70 R 20	136 G	13	13 SDC; 12 SDC	407	1076	493	3253	-	STD	bar	1.6	2.0	2.5	3.0	3.5	
										km/h						
										90	1340	1580	1820	2040	2240	
										65	1455	1715	1975	2215	2435	
40	1545	1820	2095	2350	2580											
425/75 R 20	148 G	13	13 SDC; 11 SDC; 12 SDC; 11; 12	421	1146	521	3479	-	STD	bar	1.6	2.0	2.5	3.0	3.5	4.0
										km/h						
										90	1540	1810	2150	2490	2820	3150
										65	1675	1965	2335	2705	3060	3420
40	1775	2085	2475	2865	3245	3625										
24" 495/70 R 24	155 G	W 16 L	DW 15 L; DW 16 L; W 15 L	499	1304	588	3974	-	STD	bar	1.6	2.0	2.5	3.0	3.5	
										km/h						
										90	1980	2340	2840	3250	3875	
										65	2150	2540	3085	3530	4205	
40	2280	2695	3270	3740	4460											

STD: Standard



MAIN APPLICATION:
MULTIUSE



MULTIMAX MP 522

MULTIMAX MP 522 is the BKT multi-purpose tire developed for manifold agro-industrial applications. It is suitable for all digging and loading operations on vehicles such as telehandlers, compact loaders and backhoe loaders. Stability and high load capacity are its strengths as well as outstanding puncture resistance. Multimax MP 522 is the right response for all agro-industrial heavy-duty needs.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)											
		Rec.	Alt.							↓											
18"	280/80 R 18	132 A8/B	9; 9 SDC	-	282	907	421	2727	350	STD											
											bar										
											1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4		
											km/h										
											50	960	1140	1300	1480	1660	1780	2000	-	-	
											40	960	1140	1300	1480	1660	1780	2000	-	-	
											30	1030	1220	1395	1585	1780	1905	2140	-	-	
25	1070	1270	1445	1645	1845	1980	2220	-	-												
10 Cyc.	1170	1440	1695	1950	2220	2415	2730	2880	3000												
Static	1795	2210	2600	2990	3405	3705	4190	4420	4600												
20"	380/75 R 20 (14.5 R 20)	148 A8/B	W 12	W 11; 11; 12	384	1074	483	3251	500	STD											
											bar										
											1.6	2.0	2.4	2.8	3.2	3.6	3.8	4.0	4.2	4.4	
											km/h										
											50	1500	1770	2040	2305	2575	2860	3005	3150	-	-
											40	1500	1770	2040	2305	2575	2860	3005	3150	-	-
											30	1610	1900	2195	2490	2780	3075	3220	3370	-	-
25	1670	1975	2280	2585	2890	3195	3350	3500	-	-											
10 Cyc.	1850	2260	2670	3080	3490	3900	4110	4315	4520	4730											
Static	2840	3470	4100	4730	5360	5990	6305	6620	6935	7250											
20"	400/70 R 20 (16.0/70 R 20)	149 A8/B	13	12 SDC; 13 SDC; 14	404	1068	476	3199	525	STD											
											bar										
											1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4		
											km/h										
											50	1560	1855	2115	2405	2700	2895	3250	-	-	
											40	1560	1855	2115	2405	2700	2895	3250	-	-	
											30	1675	1985	2265	2580	2890	3100	3480	-	-	
25	1735	2060	2350	2675	3000	3215	3610	-	-												
10 Cyc.	1905	2340	2755	3170	3610	3925	4440	4680	4875												
Static	2920	3590	4225	4860	5535	6020	6805	7180	7475												
24"	460/70 R 24 (17.5L R 24)	159 A8/B	DW 15 L	DW 14 L; DW 16 L	465	1250	568	3766	600	STD											
											bar										
											1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4		
											km/h										
											50	2100	2495	2845	3240	3635	3895	4375	-	-	
											40	2100	2495	2845	3240	3635	3895	4375	-	-	
											30	2250	2675	3050	3470	3890	4170	4685	-	-	
25	2335	2775	3160	3600	4035	4330	4860	-	-												
10 Cyc.	2565	3155	3710	4270	4860	5285	5975	6305	6565												
Static	3930	4835	5690	6545	7450	8105	9160	9665	10065												
24"	500/70 R 24 (19.5L R 24)	164 A8/B	DW 16 L	DW 15 L; DW 18 L	503	1310	595	3890	625	STD											
											bar										
											1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4		
											km/h										
											50	2400	2850	3250	3700	4150	4450	5000	-	-	
											40	2400	2850	3250	3700	4150	4450	5000	-	-	
											30	2570	3050	3480	3960	4445	4765	5350	-	-	
25	2665	3165	3610	4110	4610	4940	5550	-	-												
10 Cyc.	2925	3600	4240	4875	5550	6040	6825	7200	7500												
Static	4485	5520	6500	7475	8510	9260	10465	11040	11500												

STD: Standard



MAIN APPLICATION:
MULTIUSE



MULTIMAX MP 540

MULTIMAX MP 540 has been designed by BKT for multi-purpose vehicles in municipality/maintenance applications. Thanks to the strong steel-belted nylon casing, MULTIMAX MP 540 allows to carry heavy loads at high speeds.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)							
		Rec.	Alt.							↓							
											bar	4.0	4.5	5.0	5.5	6.0	6.5
20" 335/80 R 20	149 K	11	-	325	1040	480	3130	-	STD	110	2205	2420	2635	2845	3050	3250	
											100	2205	2420	2635	2845	3050	3250
											90	2250	2470	2685	2900	3110	3315
											80	2290	2520	2740	2955	3170	3380
											70	2360	2595	2820	3045	3265	3480

STD: Standard



MAIN APPLICATION:
MULTIUSE



RT 747 AGRO INDUSTRIAL

RT 747 AGRO INDUSTRIAL is a radial agro-industrial tire suitable for backhoe loaders, compact loaders and telehandlers. Its extra wide lugs provide excellent grip and great stability in lift operations. RT 747 AGRO INDUSTRIAL is the right answer to all general farming operations that need outstanding versatility.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)							
		Rec.	Alt.							↓							
24" 460/70 R 24 (17.5L R 24)	152 A8/149 B	DW 15 L	DW 14 L; DW 16 L	465	1254	556	3840	575	STD	bar	1.2	1.6	2.0	2.4	2.8	3.2	
										km/h	50	1530	1885	2210	2570	2985	3250
										40	1670	2060	2415	2805	3160	3550	
										30	1785	2205	2585	3000	3380	3800	
										25	1850	2285	2680	3115	3505	3940	
										10 Cyc	2505	3090	3620	4205	4740	5325	
										Static	3505	4325	5070	5890	6635	7455	
										500/70 R 24 (19.5L R 24)	157 A8/154 B	DW 16 L	DW 15 L; DW 18 L	485	1320	585	3949
km/h	50	1765	2175	2550	2965	3340	3750										
40	1940	2395	2805	3260	3670	4125											
30	2075	2560	3000	3490	3930	4415											
25	2155	2655	3115	3620	4075	4580											
10 Cyc	2910	3590	4210	4890	5510	6190											
Static	4075	5025	5890	6845	7710	8665											

STD: Standard



MAIN APPLICATION:
MULTIUSE



AT 603

AT 603 is a bias agro-industrial tire for backhoe loaders, compact loaders and compact dumpers in digging and loading applications. AT 603 has been engineered to ensure great traction on drive wheels providing the best performance on and off the road. The AT 603 "special" version offers improved cut and chip resistance while the "HD" version is ideal for heavy-duty service.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)	
	Rec.	Alt.									↓	↓
18" 10.5/80 - 18	W 9	W 8; 9	274	907	405	2657	STD	10	TL	138 A6/131 A8	bar	5.10
											km/h	
											30 FR HLV	2360
											40 FR HLV	1950
10.5/80 - 18	W 9	W 8; 9	274	907	405	2657	HD	10	TL	138 A6/131 A8	bar	5.10
											km/h	
											30 FR HLV	2360
											40 FR HLV	1950
10.5/80 - 18	W 9	W 8; 9	274	907	405	2657	SPL	10	TL	138 A6/131 A8	bar	5.10
											km/h	
											30 FR HLV	2360
											40 FR HLV	1950
12.5/80 - 18	W 9	11	308	987	438	2892	STD	12	TL	148 A6/142 A8	bar	5.10
											km/h	
											30 FR HLV	3150
											40 FR HLV	2650
12.5/80 - 18	W 9	11	308	987	438	2892	SPL	12	TL	148 A6/142 A8	bar	5.10
											km/h	
											30 FR HLV	3150
											40 FR HLV	2650
12.5/80 - 18	W 9	11	308	987	438	2892	STD	16	TL	154 A6/150 A8	bar	6.70
											km/h	
											30 FR HLV	3750
											40 FR HLV	3350
12.5/80 - 18	W 9	11	308	987	438	2892	STD	18	TL	156 A6/150 A8	bar	7.20
											km/h	
											30 FR HLV	4000
											40 FR HLV	3350

HD: Heavy Duty Version ①
SPL: Special Version ②
STD: Standard



MAIN APPLICATION:
MULTIUSE



AT 621 (R-4)

AT 621 is suitable for backhoe loaders and compact loaders in all farming digging and loading operations. The AT 621 tire features an extra deep tread which ensures great cut resistance and higher durability. AT 621 is available in several versions to meet the most differing user requirements.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)		
	Rec.	Alt.									bar	km/h	
15" 33 X 12.5 - 15	10.00 F SDC	-	318	851	385	2493	STD	8	TT	-	bar	3.25	
											km/h	2130	
											10	2130	
16" 12.5/70 - 16	10 LB	-	315	855	385	2584	STD	8	TL	-	bar	2.60	
											km/h	1645	
											10	1645	
18"	12.5/80 - 18	W 9	11.0	308	987	465	2928	STD	12	TT	148 A6/142 A8	bar	5.10
												km/h	3150
												30 FR HLV	2650
	12.5/80 - 18	W 9	11.0	308	987	465	2928	STD	12	TL	148 A6/142 A8	bar	5.10
												km/h	3150
												30 FR HLV	2650
	12.5/80 - 18	W 9	11	308	987	465	2928	SPL	12	TL	148 A6/142 A8	bar	5.10
												km/h	3150
												30 FR HLV	2650
	12.5/80 - 18	W 9	11.0	308	987	465	2928	STD	16	TT	154 A6/150 A8	bar	6.70
												km/h	3750
												30 FR HLV	3350
12.5/80 - 18	W 9	11.0	308	987	465	2928	IND HD	16	TL	154 A6/150 A8	bar	6.70	
											km/h	3750	
											30 FR HLV	3350	
15.5/60 - 18	W 13	-	400	950	428	2871	STD	10	TL	-	bar	2.60	
											km/h	2400	
											10	2400	
15.5/70 - 18 (400/70 - 18)	W 13	-	400	1030	474	3111	STD	10	TL	-	bar	2.60	
											km/h	2700	
											10	2700	

STD: Standard
SPL: Special Version ①
IND HD: Industrial Heavy Duty Version ②



MAIN APPLICATION:
MULTIUSE



AT 621 (R-4)

AT 621 is suitable for backhoe loaders and compact loaders in all farming digging and loading operations. The AT 621 tire features an extra deep tread which ensures great cut resistance and higher durability. AT 621 is available in several versions to meet the most differing user requirements.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)		
	Rec.	Alt.									bar	km/h	
20"	17.5/65 - 20	W 14 L	-	450	1090	490	3294	STD	10	TL	-	bar	2.40
												km/h	10
20"	42 X 17 - 20	14.00 TG SDC	-	432	1073	480	3198	STD	10	TT	-	bar	3.00
												km/h	10
24"	16.9 - 24	DW 15 L	DW 14 L	450	1302	582	3776	IND	12	TL	149 A8	bar	2.60
												km/h	40
24"	17.5L - 24	DW 15 L	DW 14 L	450	1255	563	3640	STD	8	TL	139 A8	bar	1.70
												km/h	40
24"	19.5L - 24	DW 16 L	-	482	1305	587	3936	STD	12	TL	151 A8	bar	2.30
												km/h	40
26"	18.4 - 26	DW 16 L	DW 15 L	480	1425	636	4133	STD	12	TL	156 A8	bar	2.50
												km/h	40
28"	16.9 - 28	DW 15 L	DW 14 L	450	1410	645	4247	IND	12	TT	152 A8	bar	2.60
												km/h	40
28"	16.9 - 28	DW 15 L	DW 14 L	450	1410	645	4247	IND	12	TL	152 A8	bar	2.60
												km/h	40
30"	16.9 - 30	DW 15 L	DW 14 L	450	1410	645	4247	IND	12	TL	153 A8	bar	2.60
												km/h	40

STD: Standard
IND: Industrial



MAIN APPLICATION:
MULTIUSE



MP 567

MP 567 is an agro-industrial tire suitable for field and road transport, municipality/maintenance operations as well as soil tillage applications depending on the tire size. The MP 567 tire provides good traction in all the weather conditions as well as excellent self-cleaning properties.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)		
	Rec.	Alt.									bar	km/h	
15.3"	10.0/75 - 15.3	9.0	-	258	774	355	2310	STD	10	TL	-	bar	3.90
												km/h	1735
												30	1550
10.0/75 - 15.3	9.0	-	258	774	355	2310	STD	12	TL	-	bar	4.70	
											km/h	1905	
											30	1700	
10.0/75 - 15.3	9.0	-	258	774	355	2310	STD	14	TL	-	bar	5.50	
											km/h	2130	
											30	1900	
10.0/75 - 15.3	9.0	-	258	774	355	2310	STD	18	TL	-	bar	7.10	
											km/h	2440	
											30	2180	
11.5/80 - 15.3	9.0	-	292	868	393	2578	STD	10	TL	-	bar	3.40	
											km/h	2185	
											30	1950	
11.5/80 - 15.3	9.0	-	292	868	393	2578	STD	14	TL	-	bar	4.75	
											km/h	2720	
											30	2430	
11.5/80 - 15.3	9.0	-	292	868	393	2578	STD	18	TL	-	bar	6.00	
											km/h	3050	
											30	2725	
18"	10.5 - 18	9	9 SDC	270	905	415	2700	STD	10	TT	-	bar	3.75
												km/h	1700
												90	1955
10.5 - 18	9	9 SDC	270	905	415	2700	STD	10	TL	-	bar	3.75	
											km/h	1700	
											90	1955	
10.5 - 18	9	9 SDC	270	905	415	2700	STD	12	TL	-	bar	4.50	
											km/h	1900	
											90	2190	
12.5 - 18	11	12 SDC	325	990	450	2940	STD	10	TT	-	bar	3.00	
											km/h	1800	
											90	2070	

STD: Standard



MAIN APPLICATION:
MULTIUSE



MP 567

MP 567 is an agro-industrial tire suitable for field and road transport, municipality/maintenance operations as well as soil tillage applications depending on the tire size. The MP 567 tire provides good traction in all the weather conditions as well as excellent self-cleaning properties.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)		
	Rec.	Alt.									bar	km/h	
18"	12.5 - 18	11	12 SDC	325	990	450	2940	STD	10	TL	-	bar	3.00
												km/h	1800
												90	2070
												40	
12.5 - 18	11	12 SDC	325	990	450	2940	STD	12	TT	-	bar	3.50	
											km/h	1950	
											90	2245	
											40		
12.5 - 18	11	12 SDC	325	990	450	2940	STD	12	TL	-	bar	3.50	
											km/h	1950	
											90	2245	
											40		
12.5 - 18	11	12 SDC	325	990	450	2940	STD	16	TL	-	bar	4.50	
											km/h	2250	
											90	2585	
											40		
19.5"	18 - 19.5	14.00	-	460	1104	498	3280	STD	14	TL	-	bar	4.75
												km/h	3925
												50	4150
												40	
18 - 19.5	14.00	-	460	1104	498	3280	STD	16	TL	-	bar	6.00	
											km/h	4500	
											50	4700	
											40		
18 - 19.5	14.00	-	460	1104	498	3280	STD	18	TL	-	bar	7.25	
											km/h	5150	
											50	5460	
											40		
20"	10.5 - 20	9	9 SDC	270	955	445	2880	STD	10	TT	-	bar	3.75
												km/h	1800
												90	2070
												40	
10.5 - 20	9	9 SDC	270	955	445	2880	STD	10	TL	-	bar	3.75	
											km/h	1800	
											90	2070	
											40		
12.5 - 20	11.0	12 SDC	325	1040	475	3090	STD	10	TT	-	bar	3.00	
											km/h	1850	
											90	2130	
											40		
12.5 - 20	11.0	12 SDC	325	1040	475	3090	STD	10	TL	-	bar	3.00	
											km/h	1850	
											90	2130	
											40		

STD: Standard

Tolerances: O.D. ± 2% - S.W. ± 2% - RC ± 2.5%



MAIN APPLICATION:
MULTIUSE



MP 567

MP 567 is an agro-industrial tire suitable for field and road transport, municipality/maintenance operations as well as soil tillage applications depending on the tire size. The MP 567 tire provides good traction in all the weather conditions as well as excellent self-cleaning properties.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)		
	Rec.	Alt.									↓		
20" 12.5 - 20	11.0	12 SDC	325	1040	475	3090	STD	12	TT	-	bar	3.50	
											km/h	90	2000
											40	2300	
12.5 - 20	11.0	12 SDC	325	1040	475	3090	STD	12	TL	-	bar	3.50	
											km/h	90	2000
											40	2300	
14.5 - 20	11	12 SDC	360	1116	495	3315	STD	10	TL	-	bar	2.50	
											km/h	90	2000
											40	2300	
14.5 - 20	11	12 SDC	360	1116	495	3315	STD	12	TL	-	bar	3.00	
											km/h	90	2240
											40	2580	
14.5 - 20	11	12 SDC	360	1116	495	3315	STD	14	TL	-	bar	3.50	
											km/h	90	2430
											40	2790	
14.5 - 20	11	12 SDC	360	1116	495	3315	STD	16	TL	-	bar	4.00	
											km/h	90	2575
											40	2960	
14.5 - 20	11	12 SDC	360	1116	495	3315	STD	18	TL	-	bar	4.50	
											km/h	90	2725
											40	3135	
16.0/70 - 20 (405/70 - 20)	13 SDC	12	405	1128	490	3350	STD	14	TL	-	bar	3.50	
											km/h	90	2900
											40	3340	
16.0/70 - 20 (405/70 - 20)	13 SDC	12	405	1128	490	3350	STD	14	TT	-	bar	3.50	
											km/h	90	2900
											40	3340	

STD: Standard



MAIN APPLICATION:
MULTIUSE



MP 570

MP 570 is a road-oriented and agro-industrial tire, which is suitable for excavators and compact loaders. This tire provides good traction as well as excellent self-cleaning properties in all operating conditions.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)			
	Rec.	Alt.									↓			
18"	12.5 - 18	11	12 SDC	308	990	450	2950	STD	10	TL	-	bar	3.00	
												km/h	80	1930
												50	2000	
18"	12.5 - 18	11	12 SDC	308	990	450	2950	STD	12	TL	-	bar	3.50	
												km/h	80	2030
												50	2180	
20"	12.5 - 20	11	12 SDC	335	1050	480	3130	STD	10	TL	-	bar	3.00	
												km/h	80	1850
												50	2065	
20"	12.5 - 20	11	12 SDC	325	1040	475	3090	STD	12	TL	-	bar	3.50	
												km/h	80	2060
												50	2300	
20"	14.5 - 20	11	12 SDC	360	1116	505	3325	STD	12	TL	-	bar	3.00	
												km/h	65	2430
												50	2500	

STD: Standard



MAIN APPLICATION:
MULTIUSE



MP 585

MP 585 is a road-oriented and agro-industrial tire, which is suitable for multi-purpose vehicles in municipality/maintenance applications. This tire is specially engineered with a tread pattern that offers maximum stability in the most difficult working conditions.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)	
	Rec.	Alt.									↓	
20" 10.5 - 20	9	9 SDC	273	970	455	2890	STD	10	TL	-	bar	3.75
											km/h	1800
											50	2000
12.5 - 20	11	12 SDC	335	1050	480	3130	STD	12	TL	-	bar	3.50
											km/h	2000
											50	2240

STD: Standard



MP 590

MP 590 is an agro-industrial tire suitable for loading operations with compact loaders, telehandlers and forklifts. This tire provides good traction and excellent stability as well as high load capacity to enhance productivity.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)	
	Rec.	Alt.									↓	
22,5" 18 - 22.5 (445/65 - 22.5)	14.0	-	465	1190	530	3534	STD	16	TL	-	bar	5.50
											km/h	4875
											40 DW	4875
											30 DW	5450

STD: Standard



MAIN APPLICATION:
MULTIUSE



MP 600

MP 600 is a road-oriented and agro-industrial tire, suitable for loading operations with compact loaders and telehandlers. This tire provides good traction and excellent stability along with an extended product life-cycle.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)	
	Rec.	Alt.									↓	
18"	9	9 SDC	272	920	420	2740	STD	10	TL	-	bar	3.75
											km/h	1950
											40 DW	1900
											50 DW	1900
12.5 - 18	11	12 SDC	308	990	450	2950	STD	10	TL	-	bar	3.00
											km/h	2060
											40 DW	2000
											50 DW	2000
12.5 - 18	11	12 SDC	308	990	450	2950	STD	12	TL	-	bar	3.50
											km/h	2300
											40 DW	2240
											50 DW	2240
24"	13 SDC	12	405	1185	545	3530	STD	10	TL	-	bar	2.50
											km/h	2975
											40 DW	2900
											50 DW	2900
405/70 - 24 (16.0/70 - 24)	13 SDC	12	405	1185	545	3530	STD	14	TL	-	bar	3.50
											km/h	3650
											40 DW	3550
											50 DW	3550

STD: Standard



MAIN APPLICATION:
MULTIUSE



AS 504

AS 504 is an agro-industrial tire mainly designed for transport and soil tillage operations. In some sizes, AS 504 is suitable for loading and hay harvesting applications. This tire, which features excellent self-cleaning properties and increased grip, is ideal for muddy grounds. There are several versions of the AS 504 tire to meet specific end-user requirements.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)		
	Rec.	Alt.									↓		
15.3" 10.0/75 - 15.3	9.00	-	264	780	345	2285	STD	8	TT	124 A6/119 A8	bar	3.10	4.20
											km/h		
											30 FR LLV	1360	-
											30 DW LLV	950	-
											30 FR HLV	-	1600
											40 FR HLV	-	1360
											bar	3.10	4.20
km/h													
30 FR LLV	1360	-											
30 DW LLV	950	-											
30 FR HLV	-	1600											
40 FR HLV	-	1360											
10.0/75 - 15.3	9.00	-	264	780	345	2285	IND	8	TL	124 A6/119 A8	bar	3.10	4.20
											km/h		
											30 FR LLV	1360	-
											30 DW LLV	950	-
											30 FR HLV	-	1600
											40 FR HLV	-	1360
											bar	3.90	5.20
km/h													
30 FR LLV	1550	-											
30 DW LLV	1090	-											
30 FR HLV	-	1800											
40 FR HLV	-	1550											
10.0/75 - 15.3	9.00	-	264	780	345	2285	STD	14	TL	136 A6/130 A8	bar	5.50	7.10
											km/h		
											30 FR LLV	1900	-
											30 DW LLV	1320	-
											30 FR HLV	-	2240
											40 FR HLV	-	1900
											bar	7.10	7.10
km/h													
30 FR LLV	2180	-											
30 DW LLV	1500	-											
30 FR HLV	-	2650											
40 FR HLV	-	2360											

STD: Standard
IND: Industrial



MAIN APPLICATION:
MULTIUSE



AS 504

AS 504 is an agro-industrial tire mainly designed for transport and soil tillage operations. In some sizes, AS 504 is suitable for loading and hay harvesting applications. This tire, which features excellent self-cleaning properties and increased grip, is ideal for muddy grounds. There are several versions of the AS 504 tire to meet specific end-user requirements.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)		
	Rec.	Alt.									↓		
15.3" 10.0/75 - 15.3	9.00	-	264	780	345	2285	STD	18	TL	142 A6/138 A8	bar	7.10	7.10
											km/h	2180	-
											30 FR LLV	1500	-
											30 FR HLV	-	2650
											40 FR HLV	-	2360
											bar	2.70	3.70
											km/h	1700	-
30 FR LLV	1180	-											
30 DW LLV	-	2060											
30 FR HLV	-	1700											
40 FR HLV	-	-											
11.5/80 - 15.3	9.00	-	290	867	380	2540	STD	8	TT	133 A6/126 A8	bar	2.70	3.70
											km/h	1700	-
											30 FR LLV	1180	-
											30 DW LLV	-	2060
											30 FR HLV	-	1700
											40 FR HLV	-	-
											bar	3.40	4.60
km/h	1950	-											
30 FR LLV	1360	-											
30 DW LLV	-	2300											
30 FR HLV	-	1950											
40 FR HLV	-	-											
11.5/80 - 15.3	9.00	-	290	867	380	2540	STD	12	TT	141 A6/135 A8	bar	4.10	5.60
											km/h	2180	-
											30 FR LLV	1550	-
											30 DW LLV	-	2575
											30 FR HLV	-	2180
											40 FR HLV	-	-
											bar	4.10	5.60
km/h	2180	-											
30 FR LLV	1550	-											
30 DW LLV	-	2575											
30 FR HLV	-	2180											
40 FR HLV	-	-											

STD: Standard



MAIN APPLICATION:
MULTIUSE



AS 504

AS 504 is an agro-industrial tire mainly designed for transport and soil tillage operations. In some sizes, AS 504 is suitable for loading and hay harvesting applications. This tire, which features excellent self-cleaning properties and increased grip, is ideal for muddy grounds. There are several versions of the AS 504 tire to meet specific end-user requirements.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)		
	Rec.	Alt.									↓		
15.3"	9.00	-	290	867	380	2540	STD	14	TT	145 A6/139 A8	bar	4.80	6.50
											km/h		
											30 FR LLV	2430	-
											30 DW LLV	1700	-
											30 FR HLV	-	2900
											40 FR HLV	-	2430
											bar	4.80	6.50
											km/h		
											30 FR LLV	2430	-
											30 DW LLV	1700	-
30 FR HLV	-	2900											
4 FR HLV	-	2430											
27 X 10 - 15.3	9.00	-	260	695	317	2071	STD	8	TT	114 A6/110 A8	bar	3.10	4.20
											km/h		
											30 FR LLV	975	-
											30 DW LLV	690	-
											30 FR HLV	-	1180
											40 FR HLV	-	1060
											bar	3.10	4.20
											km/h		
											30 FR LLV	975	-
											30 DW LLV	690	-
30 FR HLV	-	1180											
40 FR HLV	-	1060											
16"	4.00 E	4.50 E; 4½ K	164	735	343	2190	STD	6	TT	101 A6/98 A8	bar	2.80	3.80
											km/h		
											30 FR LLV	690	-
											30 DW LLV	485	-
											30 FR HLV	-	825
											40 FR HLV	-	750
											bar	2.30	3.00
											km/h		
											30 FR LLV	900	-
											30 DW LLV	630	-
30 FR HLV	-	1090											
40 FR HLV	-	975											

STD: Standard



MAIN APPLICATION:
MULTIUSE



AS 504

AS 504 is an agro-industrial tire mainly designed for transport and soil tillage operations. In some sizes, AS 504 is suitable for loading and hay harvesting applications. This tire, which features excellent self-cleaning properties and increased grip, is ideal for muddy grounds. There are several versions of the AS 504 tire to meet specific end-user requirements.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)		
	Rec.	Alt.									↓		
16" 7.50 - 16	5.50 F	4.50 E; 5.00 F; 4.00 E; 5 K; 6 LB; 6.00 F	209	803	372	2393	STD	8	TT	119 A6/115 A8	bar	3.20	4.50
											km/h		
											30 FR LLV	1120	-
											30 DW LLV	775	-
											30 FR HLV	-	1360
											40 FR HLV	-	1215
											bar	3.20	4.50
km/h													
30 FR LLV	1120	-											
30 DW LLV	775	-											
30 FR HLV	-	1360											
40 FR HLV	-	1215											
17" 15.0/55 - 17	13.00	13	380	890	395	2608	STD	10	TL	141 A6/134 A8	bar	2.60	3.60
											km/h		
											30 FR LLV	2120	-
											30 DW LLV	1500	-
											30 FR HLV	-	2575
											40 FR HLV	-	2120
											bar	3.60	4.90
km/h													
30 FR LLV	2575	-											
30 DW LLV	1850	-											
30 FR HLV	-	3075											
40 FR HLV	-	2575											
19.0/45 - 17	16.00	-	465	865	389	2578	STD	14	TL	150 A6/146 A8	bar	2.80	3.80
											km/h		
											30 FR LLV	2800	-
											30 DW LLV	1950	-
											30 FR HLV	-	3350
40 FR HLV	-	3000											
420/55 - 17	13.00	-	430	910	407	2712	STD	14	TL	-	bar	3.00	
											km/h		
											40 FR LLV	2650	
											40 DW LLV	1850	
420/55 - 17	13.00	-	430	910	407	2712	STD	16	TL	-	bar	3.50	
											km/h		
											40 FR LLV	2900	
											40 DW LLV	2060	

STD: Standard



MAIN APPLICATION:
MULTIUSE



AS 504

AS 504 is an agro-industrial tire mainly designed for transport and soil tillage operations. In some sizes, AS 504 is suitable for loading and hay harvesting applications. This tire, which features excellent self-cleaning properties and increased grip, is ideal for muddy grounds. There are several versions of the AS 504 tire to meet specific end-user requirements.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)		
	Rec.	Alt.									↓		
18" 7.50 - 18	5.50 F	4.50 E; 6.00 F; 5.00 F	209	854	407	2649	STD	6	TT	113 A6/109 A8	bar	2.30	2.90
											km/h		
											30 FR LLV	950	-
											30 DW LLV	670	-
											30 FR HLV	-	1150
											40 FR HLV	-	1030
											bar	3.10	4.30
km/h													
30 FR LLV	1180	-											
30 DW LLV	825	-											
30 FR HLV	-	1400											
40 FR HLV	-	1285											
10.5/80 - 18	W 9	9; W 8	274	907	405	2657	STD	10	TL	138 A6/131 A8	bar	3.70	5.10
											km/h		
											30 FR LLV	1950	-
											30 DW LLV	1360	-
											30 FR HLV	-	2360
											40 FR HLV	-	1950
											bar	3.70	5.10
km/h													
30 FR LLV	2650	-											
30 DW LLV	1850	-											
30 FR HLV	-	3150											
40 FR HLV	-	2650											
12.5/80 - 18	W 9	9; 11	308	987	438	2892	STD	12	TL	148 A6/142 A8	bar	3.70	5.10
											km/h		
											30 FR LLV	2650	-
											30 DW LLV	1850	-
											30 FR HLV	-	3150
											40 FR HLV	-	2650
											bar	4.90	6.70
km/h													
30 FR LLV	3150	-											
30 DW LLV	2180	-											
30 FR HLV	-	3750											
40 FR HLV	-	3350											
12.5/80 - 18	W 9	9; 11	308	987	438	2892	STD	16	TL	154 A6/150 A8	bar	5.50	7.20
											km/h		
											30 FR LLV	3350	-
											30 DW LLV	2360	-
											30 FR HLV	-	4000
											40 FR HLV	-	3350

STD: Standard



MAIN APPLICATION:
MULTIUSE



AS 504

AS 504 is an agro-industrial tire mainly designed for transport and soil tillage operations. In some sizes, AS 504 is suitable for loading and hay harvesting applications. This tire, which features excellent self-cleaning properties and increased grip, is ideal for muddy grounds. There are several versions of the AS 504 tire to meet specific end-user requirements.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)		
	Rec.	Alt.									↓		
20" 7.50 - 20	5.50 F	4.50 E; 6.00 F; 5.00 F	209	904	422	2695	STD	8	TT	122 A6/119 A8	bar	3.20	4.20
											km/h		
											30 FR LLV	1250	-
											30 DW LLV	875	-
											30 FR HLV	-	1500
											40 FR HLV	-	1360
											bar	2.50	3.40
16.0/70 - 20	13	12 SDC; 14; 13 SDC	408	1097	487	3214	STD	10	TL	153 A6/147 A8	bar	2.50	3.40
											km/h		
											30 FR LLV	3075	-
											30 DW LLV	2180	-
											30 FR HLV	-	3650
											40 FR HLV	-	3075
											bar	3.00	4.10
16.0/70 - 20	13	12 SDC; 14; 13 SDC	408	1097	487	3214	STD	12	TL	157 A6/151 A8	bar	3.00	4.10
											km/h		
											30 FR LLV	3450	-
											30 DW LLV	2430	-
											30 FR HLV	-	4125
											40 FR HLV	-	3450
											bar	3.50	4.80
16.0/70 - 20	13	12 SDC; 14; 13 SDC	408	1097	487	3214	STD	14	TL	160 A6/1564 A8	bar	3.50	4.80
											km/h		
											30 FR LLV	3750	-
											30 DW LLV	2650	-
											30 FR HLV	-	4500
											40 FR HLV	-	3750
											bar	4.00	5.50
16.0/70 - 20	13	12 SDC; 14; 13 SDC	408	1097	487	3214	STD	16	TL	162 A6/156 A8	bar	4.00	5.50
											km/h		
											30 FR LLV	4000	-
											30 DW LLV	2800	-
											30 FR HLV	-	4750
											40 FR HLV	-	4000
											bar	4.00	
400/70 - 20	13	12 SDC; 14; 13 SDC	408	1097	487	3214	IND	-	TL	149 A8	bar	4.00	
											km/h		
40			3250										

STD: Standard
IND: Industrial ②



MAIN APPLICATION:
MULTIUSE



AS 504

AS 504 is an agro-industrial tire mainly designed for transport and soil tillage operations. In some sizes, AS 504 is suitable for loading and hay harvesting applications. This tire, which features excellent self-cleaning properties and increased grip, is ideal for muddy grounds. There are several versions of the AS 504 tire to meet specific end-user requirements.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)											
	Rec.	Alt.									↓											
24" 15.5/80 - 24	W 12	W 13; W 14 L	384	1262	566	3655	STD	10	TL	160 A6/154 A8	bar	2.50	3.40									
											km/h											
											30 FR LLV	3750	-									
											30 DW LLV	2650	-									
											30 FR HLV	-	4500									
											40 FR HLV	-	3750									
												bar	3.00	4.10								
15.5/80 - 24	W 12	W 13; W 14 L	384	1262	566	3655	STD	12	TL	163 A6/157 A8	km/h											
											30 FR LLV	4125	-									
											30 DW LLV	2900	-									
											30 FR HLV	-	4875									
											40 FR HLV	-	4125									
												bar	3.50	4.80								
15.5/80 - 24	W 12	W 13; W 14 L	384	1262	566	3655	STD	14	TL	166 A6/160 A8	km/h											
											30 FR LLV	4500	-									
											30 DW LLV	3150	-									
											30 FR HLV	-	5300									
											40 FR HLV	-	4500									
												bar	3.50	4.80								
15.5/80 - 24	W 12	W 13; W 14 L	384	1262	566	3655	SPL	14	TL	166 A6/160 A8	km/h											
											30 FR LLV	4500	-									
											30 DW LLV	3150	-									
											30 FR HLV	-	5300									
											40 FR HLV	-	4500									
												bar	4.00	5.50								
15.5/80 - 24	W 12	W 13; W 14 L	384	1262	566	3655	STD	16	TL	169 A6/163 A8	km/h											
																				30 FR LLV	4875	-
																				30 DW LLV	3450	-
																				30 FR HLV	-	5800
										40 FR HLV	-	4875										

STD: Standard
SPL: Special version ③



MAIN APPLICATION:
MULTIUSE



AS 504

AS 504 is an agro-industrial tire mainly designed for transport and soil tillage operations. In some sizes, AS 504 is suitable for loading and hay harvesting applications. This tire, which features excellent self-cleaning properties and increased grip, is ideal for muddy grounds. There are several versions of the AS 504 tire to meet specific end-user requirements.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)		
	Rec.	Alt.									↓		
24" 16.5/85 - 24	W 13	W 14 L; W 15 L	415	1325	591	3837	STD	10	TL	165 A6/161 A8	bar	2.40	3.10
											km/h		
											30 FR LLV	4250	-
											30 DW LLV	3000	-
											30 FR HLv	-	5150
											40 FR HLv	-	4625
											bar	2.80	3.80
km/h													
30 FR LLV	4875	-											
30 DW LLV	3450	-											
30 FR HLv	-	5800											
40 FR HLv	-	5150											
16.5/85 - 24	W 13	W 14 L; W 15 L	415	1325	591	3837	STD	16	TT	174 A6/170 A8	bar	3.80	5.20
											km/h		
											30 FR LLV	5600	-
											30 DW LLV	3875	-
											30 FR HLv	-	6700
											40 FR HLv	-	6000
											bar	3.80	5.20
km/h													
30 FR LLV	5600	-											
30 DW LLV	3875	-											
30 FR HLv	-	6700											
40 FR HLv	-	6000											
400/80 - 24	W 13	W 12; W 14 L	394	1262	566	3655	IND	-	TL	156 A8	bar	3.80	
											km/h		
											40	4000	
400/80 - 24	W 13	W 12; W 14 L	394	1262	566	3655	IND	-	TL	162 A8	bar	5.00	
											km/h		
											40	4750	

STD: Standard
IND: Industrial ②



**MAIN APPLICATION:
FRONT**



TF 8181 (F-2)

TF 8181 is a field and road tire designed for 2WD tractors in soil tillage and transport applications. This tire ensures a high level of handling comfort. The tire is available in different versions to specifically meet end-user requirements in terms of cut and chip resistance and heavy-duty service.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 30 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
15" 5.00 - 15	4.00 E	3.00 D; 4 J; 4 1/2 J	142	655	307	1951	STD	4	TT	73 A6	2.80	365
5.00 - 15	4.00 E	3.00 D; 4 J; 4 1/2 J	142	655	307	1951	STD	6	TT	82 A6	3.70	475
16" 4.00 - 16	3.00 D	-	112	630	301	1877	STD	4	TT	69 A6	3.40	325
4.50 - 16	3.00 D	-	122	655	311	1952	STD	4	TT	73 A6	3.10	365
5.00 - 16	4.00 E	3.00 D; 4 J; 4 1/2 J	140	680	322	2025	STD	4	TT	76 A6	2.80	400
5.00 - 16	4.00 E	3.00 D; 4 J; 4 1/2 J	140	680	322	2025	STD	6	TT	84 A6	4.20	500
5.00 - 16	4.00 E	3.00 D; 4 J; 4 1/2 J	140	680	322	2025	SPL	6	TT	84 A6	4.20	500
5.50 - 16	4.00 E	3.50 D; 4.50 E	158	720	340	2145	STD	6	TT	86 A6	3.70	530
5.50 - 16	4.00 E	3.50 D; 4.50 E	158	720	340	2145	SPL	6	TT	86 A6	3.70	530
6.00 - 16	4.50 E	4.00 E; 5 K; 5.00 F	170	745	350	2220	STD	6	TT	88 A6	3.30	560
6.00 - 16	4.50 E	4.00 E; 5 K; 5.00 F	170	745	350	2220	SPL	6	TT	88 A6	3.30	560
6.00 - 16	4.50 E	4.00 E; 5 K; 5.00 F	170	745	350	2220	STD	8	TT	94 A6	4.50	670
6.00 - 16	4.50 E	4.00 E; 5 K; 5.00 F	170	745	350	2220	SPL	8	TT	94 A6	4.50	670
6.50 - 16	4.50 E	4.00 E; 5 K; 5.00 F; 5.50 F	180	770	361	2295	STD	6	TT	91 A6	3.10	615

STD: Standard
SPL: Special version ③



MAIN APPLICATION:
FRONT



TF 8181 (F-2)

TF 8181 is a field and road tire designed for 2WD tractors in soil tillage and transport applications. This tire ensures a high level of handling comfort. The tire is available in different versions to specifically meet end-user requirements in terms of cut and chip resistance and heavy-duty service.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 30 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
16" 6.50 - 16	4.50 E	4.00 E; 5 K; 5.00 F; 5.50 F	180	770	361	2295	HD	8	TT	98 A6	4.20	750
6.50 - 16	4.50 E	4.00 E; 5 K; 5.00 F; 5.50 F	180	770	361	2295	SPL	10	TT	102 A6	5.30	850
7.50 - 16	5.50 F	5.00 F; 5 K; 6.00 F	205	820	383	2445	STD	6	TT	98 A6	2.80	750
7.50 - 16	5.50 F	5.00 F; 5 K; 6.00 F	205	820	383	2445	SPL	6	TT	98 A6	2.80	750
7.50 - 16	5.50 F	5.00 F; 5 K; 6.00 F	205	820	383	2445	STD	8	TT	103 A6	3.70	875
7.50 - 16	5.50 F	5.00 F; 5 K; 6.00 F	205	820	383	2445	SPL	8	TT	103 A6	3.70	875
7.50 - 16	5.50 F	5.00 F; 5 K; 6.00 F	205	820	383	2445	STD	10	TT	109 A6	4.80	1030
7.50 - 16	5.50 F	5.00 F; 5 K; 6.00 F	205	820	383	2445	IMP	14	TT	122 A6	5.50	1500
10.00 - 16	W 8	W 8 L	273	895	411	2667	STD	8	TT	115 A6	2.80	1215
11.00 - 16	W 10 L	W 8; W 8 L	326	980	447	2920	STD	8	TT	118 A6	2.50	1320
18" 7.50 - 18	5.50 F	-	208	875	410	2605	STD	6	TT	101 A6	2.80	825
7.50 - 18	5.50 F	-	208	875	410	2605	STD	8	TT	106 A6	3.70	950
19" 6.00 - 19	4.50 E	4.00 E; 5.00 F	165	814	385	2425	STD	6	TT	93 A6	3.30	650

HD: Heavy Duty Version ①
SPL: Special version ③
STD: Standard
IMP: Implement ②

Tolerances: O.D. ± 2% - S.W. ± 2% - RC ± 2.5%



MAIN APPLICATION:
FRONT



TF 8181 (F-2)

TF 8181 is a field and road tire designed for 2WD tractors in soil tillage and transport applications. This tire ensures a high level of handling comfort. The tire is available in different versions to specifically meet end-user requirements in terms of cut and chip resistance and heavy-duty service.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 30 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
20" 6.50 - 20	5.00 F	4.00 E; 5.50 F	180	865	409	2578	STD	6	TT	97 A6	3.10	730
6.50 - 20	5.00 F	4.00 E; 5.50 F	180	865	409	2578	STD	8	TT	101 A6	3.90	825
6.50 - 20	5.00 F	4.00 E; 5.50 F	180	865	409	2578	SPL	8	TT	101 A6	3.90	825
7.50 - 20	5.50 F	5.00 F	205	915	431	2725	STD	6	TT	103 A6	2.80	875
7.50 - 20	5.50 F	5.00 F	205	915	431	2725	HD	6	TT	103 A6	2.80	875
7.50 - 20	5.50 F	5.00 F	205	915	431	2725	STD	8	TT	109 A6	3.40	1030
7.50 - 20	5.50 F	5.00 F	205	915	431	2725	HD	8	TT	109 A6	3.40	1030

HD: Heavy Duty Version ①
SPL: Special version ③
STD: Standard



MAIN APPLICATION:
FRONT



TF 9090 (F-2)

TF 9090 is a field-oriented tire designed for 2WD tractors in soil tillage operations. Its "special" version ensures extra puncture resistance for tire usage in critical conditions.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 30 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
12" 4.00 - 12	3.00 D	2.50 C	112	530	255	1573	STD	4	TT	60 A6	3.40	250
4.00 - 12	3.00 D	2.50 C	112	530	255	1573	STD	6	TT	68 A6	5.10	315
15" 5.00 - 15	4.00 E	3.00 D; 4 J; 4½ J	140	655	307	1951	STD	4	TT	73 A6	2.80	365
5.00 - 15	4.00 E	3.00 D; 4 J; 4½ J	140	655	307	1951	STD	6	TT	82 A6	3.70	475
16" 4.00 - 16	3.00 D	-	112	630	301	1877	STD	4	TT	69 A6	3.40	325
5.50 - 16	4.00 E	3.50 D; 4.50 E	150	710	332	2116	STD	6	TT	86 A6	3.70	530
6.00 - 16	4.50 E	4.00 E; 5 K; 5.00 F	170	735	346	2190	STD	6	TT	88 A6	3.30	560
6.00 - 16	4.50 E	4.00 E; 5 K; 5.00 F	170	735	346	2190	SPL	6	TT	88 A6	3.30	560
6.00 - 16	4.50 E	4.00 E; 5 K; 5.00 F	170	735	346	2190	STD	8	TT	94 A6	4.50	670
6.00 - 16	4.50 E	4.00 E; 5 K; 5.00 F	170	735	346	2190	SPL	8	TT	94 A6	4.50	670
6.50 - 16	4.50 E	4.00 E; 5 K; 5.00 F; 5.50 F	180	765	359	2280	STD	6	TT	91 A6	3.10	615
6.50 - 16	4.50 E	4.00 E; 5 K; 5.00 F; 5.50 F	180	765	359	2280	STD	8	TT	98 A6	4.20	750
7.50 - 16	5.50 F	5.00 F; 5 K; 6.00 F	207	810	379	2414	STD	6	TT	98 A6	2.80	750
7.50 - 16	5.50 F	5.00 F; 5 K; 6.00 F	207	810	379	2414	SPL	6	TT	98 A6	2.80	750

SPL: Special version ①
STD: Standard

Tolerances: O.D. ± 2% - S.W. ± 2% - RC ± 2.5%



MAIN APPLICATION:
FRONT



TF 9090 (F-2)

TF 9090 is a field-oriented tire designed for 2WD tractors in soil tillage operations. Its "special" version ensures extra puncture resistance for tire usage in critical conditions.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 30 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
16" 7.50 - 16	5.50 F	5.00 F; 5 K; 6.00 F	207	810	379	2414	STD	8	TT	103 A6	3.70	875
7.50 - 16	5.50 F	5.00 F; 5 K; 6.00 F	207	810	379	2414	SPL	8	TT	103 A6	3.70	875
7.50 - 16	5.50 F	5.00 F; 5 K; 6.00 F	207	810	379	2414	STD	10	TT	109 A6	4.80	1030
9.00 - 16	W 8	6.00 F; W 7; W 8 L	257	855	398	2548	STD	8	TT	111 A6	3.10	1090
9.00 - 16	W 8	6.00 F; W 7; W 8 L	257	855	398	2548	STD	10	TT	116 A6	3.90	1250
9.00 - 16	W 8	6.00 F; W 7; W 8 L	257	855	398	2548	SPL	10	TT	116 A6	3.90	1250
10.00 - 16	W 8	W 8 L	275	900	418	2682	STD	8	TT	115 A6	2.80	1215
10.00 - 16	W 8	W 8 L	275	900	418	2682	SPL	8	TT	115 A6	2.80	1215
10.00 - 16	W 8	W 8 L	275	900	418	2682	STD	10	TT	119 A6	3.40	1360
10.00 - 16	W 8	W 8 L	275	900	418	2682	SPL	10	TT	119 A6	3.40	1360
11.00 - 16	W 10 L	W 8; W 8 L	320	970	448	2890	STD	8	TT	118 A6	2.50	1320
11.00 - 16	W 10 L	W 8; W 8 L	320	970	448	2890	SPL	8	TT	118 A6	2.50	1320
18" 7.50 - 18	5.50 F	-	207	860	404	2562	STD	6	TT	101 A6	2.80	825
7.50 - 18	5.50 F	-	207	860	404	2562	SPL	6	TT	101 A6	2.80	825
7.50 - 18	5.50 F	-	207	860	404	2562	STD	8	TT	106 A6	3.70	950

SPL: Special version ①
STD: Standard



MAIN APPLICATION:
FRONT



TF 9090 (F-2)

TF 9090 is a field-oriented tire designed for 2WD tractors in soil tillage operations. Its "special" version ensures extra puncture resistance for tire usage in critical conditions.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 30 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
18" 7.50 - 18	5.50 F	-	207	860	404	2562	SPL	8	TT	106 A6	3.70	950
7.50 - 18	5.50 F	-	207	860	404	2562	STD	10	TT	113 A6	4.75	1150
19" 4.00 - 19	3.00 D	-	115	715	343	2145	STD	4	TT	72 A6	3.40	355
6.00 - 19	4.50 E	4.00 E; 5.00 F	167	815	386	2445	STD	6	TT	93 A6	3.30	650
20" 7.50 - 20	5.50 F	5.00 F	205	915	431	2725	STD	6	TT	103 A6	2.80	875
7.50 - 20	5.50 F	5.00 F	205	915	431	2725	SPL	6	TT	103 A6	2.80	875
7.50 - 20	5.50 F	5.00 F	205	915	431	2725	STD	8	TT	109 A6	3.40	1030
7.50 - 20	5.50 F	5.00 F	205	915	431	2725	SPL	8	TT	109 A6	3.40	1030

SPL: Special version ①
STD: Standard



MAIN APPLICATION:
FRONT



POWER RIB F2

POWER RIB F2 has been specially designed for 2WD tractors in soil tillage applications. This field-oriented tire is particularly suitable for all operations requiring a high level of handling comfort.



SIZE	RIM		S.W. (in.)	O.D. (in.)	SLR (in.)	RC (in.)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 30 KM/H	
	Rec.	Alt.									bar	max load (kg)
15" 11L - 15 SL	8 LB	10 LB	279	813	374	2423	STD	8	TL	110 A6	3.00	1060

STD: Standard



PRO RIB F2M (F-2M)

PRO RIB F2M is a field-oriented tire for 2WD tractors in soil tillage applications. It is particularly suitable for all operations requiring a high level of handling. It provides high flotation capability contributing to reduce soil compaction.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 40 KM/H	
	Rec.	Alt.									bar	max load (kg)
15" 9.5L - 15 SL	7.00	8 LB	240	780	364	2325	STD	8	TL	102 A8	3.30	850
15" 11L - 15 SL	8 LB	10 LB	280	795	370	2370	STD	8	TL	106 A8	3.00	950
16" 10.00 - 16 SL	8 LB	W 8 L	280	880	409	2620	STD	8	TT	110 A8	3.00	1060
16" 11.00 - 16 SL	10 LB	W 8 L; 8 LB	335	950	440	2830	STD	8	TT	114 A8	2.80	1180
16.1" 14L - 16.1 SL	W 11 C	-	355	980	453	2920	STD	12	TL	127 A8	3.60	1750

STD: Standard



MAIN APPLICATION:
FRONT



RIB F3 (F-3)

RIB F3 is a field-oriented tire designed for 2WD tractors in soil tillage operations. Some sizes are suitable for transport applications using implement machinery and trailers. The RIB F3 tire is the ideal partner for all operations that require a high level of handling. It also ensures significant fuel savings to improve your business productivity.



HANDLING



FUEL ECONOMY

SIZE	RIM		S.W. (in.)	O.D. (in.)	SLR (in.)	RC (in.)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)	
	Rec.	Alt.									bar	km/h
16" 9.00 - 16	W 8	6.00 F; W 7; W 8 L	878	387	2573	101.3	STD	12	TT	120 A6/ 112 A8	4.70	1400
9.00 - 16	W 8	6.00 F; W 7; W 8 L	878	387	2573	101.3	HD	12	TT	120 A6/ 112 A8	4.70	1120

HD: Heavy Duty Version
STD: Standard



STEER FARM (F-2)

STEER FARM has been designed for 2WD tractors in soil tillage applications as well as in-the-field and on-the-road transport. This tire features high cut and chip resistance and reduces stone retention making it suitable for all your heavy-duty service operations. STEER FARM has been specifically engineered for agricultural needs and is tested to provide an extended tire life-cycle.



HEAVY DUTY SERVICE



DURABILITY



CUT & CHIP RESISTANCE

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 30 KM/H	
	Rec.	Alt.									bar	max load (kg)
14" 5.20 - 14	3.50 D	4.00 E	135	625	-	-	STD	6	TT	-	4.50	387
16" 6.00 - 16	4.50 E	4.00 E; 5 K; 5.00 F	170	740	345	2205	STD	8	TT	94 A6	4.50	670
6.50 - 16	4.50 E	4.00 E; 5.00 F; 5.50 F	185	770	-	-	STD	8	TT	98 A6	4.20	750
7.50 - 16	5.50 F	5.00 F; 5 K; 6.00 F	205	805	373	2391	STD	8	TT	103 A6	3.70	875
20" 6.50 - 20	5.50 F	4.00 E; 5.00 F	196	878	-	-	STD	8	TT	101 A6	4.50	825

STD: Standard

Tolerances: O.D. ± 2% - S.W. ± 2% - RC ± 2.5%



MAIN APPLICATION:
IMPLEMENT



AW 711

AW 711 is an implement radial tire specially designed for modern farming, and suitable for general purpose applications. Thanks to its special tread compound, the AW 711 has an extended product life-cycle, whether it is used on soft or hard surfaces. The low rolling resistance during on-road travel ensures significant savings in fuel consumption.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)																								
		Rec.	Alt.																															
16.5"	340/60 R 16.5	145 A8/B	11	-	324	820	368	2476	-	STD	bar	0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	5.0													
											mph																							
											50	870	1135	1395	1595	1860	2120	2265	2495	2730	2900													
											40	870	1135	1395	1595	1860	2120	2265	2495	2730	2900													
											30	975	1270	1560	1790	2080	2375	2535	2795	3055	3250													
											25	1040	1350	1660	1905	2215	2525	2695	2975	3250	3455													
											20	1100	1430	1755	2015	2340	2670	2855	3145	3440	3655													
10	1220	1585	1950	2235	2600	2965	3170	3495	3820	4060																								
16.5"	380/55 R 16.5	150 A8/B	12	11.75	360	830	372	2500	-	STD	bar	0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	5.0													
											mph																							
											50	1005	1310	1610	1845	2145	2450	2615	2885	3150	3350													
											40	1005	1310	1610	1845	2145	2450	2615	2885	3150	3350													
											30	1130	1465	1805	2070	2405	2745	2930	3230	3530	3755													
											25	1200	1560	1920	2195	2555	2915	3115	3435	3755	3990													
											20	1270	1650	2030	2325	2705	3085	3300	3635	3975	4225													
10	1410	1830	2255	2580	3005	3425	3660	4035	4410	4690																								
18"	400/60 R18	159 A8/B	14	13	394	945	419	2807	-	STD	bar	0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6	3.8	4.0	5.0	5.5											
											mph																							
											50	1220	1585	1950	2235	2600	2965	3165	3490	3655	3815	4057	4375											
											40	1220	1585	1950	2235	2600	2965	3165	3490	3655	3815	4057	4375											
											30	1365	1775	2185	2500	2910	3320	3550	3910	4095	4275	4545	4900											
											25	1450	1885	2320	2660	3095	3530	3770	4155	4350	4545	4830	5210											
											20	1535	1995	2460	2815	3275	3735	3990	4400	4605	4810	5115	5515											
10	1705	2220	2730	3125	3640	4150	4435	4885	5115	5340	5680	6125																						
18"	440/55 R 18	159 A8/B	14	13	410	945	432	2893	-	STD	bar	0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	5.0													
											mph																							
											50	1315	1710	2100	2410	2800	3195	3415	3765	4115	4375													
											40	1315	1710	2100	2410	2800	3195	3415	3765	4115	4375													
											30	1470	1915	2355	2695	3140	3580	3825	4215	4610	4900													
											25	1565	2035	2505	2870	3335	3805	4065	4485	4900	5210													
											20	1655	2155	2650	3035	3530	4030	4305	4745	5185	5515													
10	1840	2390	2940	3370	3920	4475	4780	5270	5760	6125																								
19.5"	15 R 19.5	139 D	11.75	12.75	389	1019	452	3055	-	STD	bar	0.8	1.2	1.6	2.0	2.4	2.8	3.2	3.6	4.0	5.0	5.5												
											mph																							
											65	660	855	1045	1170	1365	1535	1705	1850	2045	2285	2430												
											50	840	1090	1340	1495	1745	1960	2180	2365	2615	2925	3110												
											40	885	1145	1405	1565	1830	2055	2285	2480	2740	3065	3260												
											25	960	1245	1530	1710	1995	2240	2490	2705	2990	3345	3555												
											10	1335	1730	2125	2370	2765	3110	3455	3755	4150	4640	4935												

STD: Standard



MAIN APPLICATION:
IMPLEMENT



AW 702

AW 702 has been developed for implement machinery and trailers in soil tillage and transport applications. This heavy-duty tire has been designed by BKT to provide a new level of durability. AW 702 is available in different versions to meet specific end-user needs.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)	
	Rec.	Alt.									bar	km/h
12" 7.00 - 12	4.25	-	185	665	295	1948	STD	6	TL	101 A6/98 A8	bar	3.40
											km/h	825
											30 FR HLV	750
											40 FR HLV	750
10.0/80 - 12	9.00	7.0	264	710	313	2080	STD	8	TL	122 A6/116 A8	bar	4.20
											km/h	1500
											30 FR HLV	1250
											40 FR HLV	1250
10.0/80 - 12	9.00	7.0	264	710	313	2080	STD	10	TL	126 A6/121 A8	bar	5.40
											km/h	1700
											30 FR HLV	1450
											40 FR HLV	1450
10.0/80 - 12	9.00	7.0	264	710	313	2080	AB	10	TL	126 A6/121 A8	bar	5.40
											km/h	1700
											30 FR HLV	1450
											40 FR HLV	1450
10.0/80 - 12	9.00	7.0	264	710	313	2080	SPL	10	TL	126 A6/121 A8	bar	5.40
											km/h	1700
											30 FR HLV	1450
											40 FR HLV	1450
15.3" 10.0/75 - 15.3	9.00	-	274	760	343	2227	STD	8	TT	124 A6/119 A8	bar	4.20
											km/h	1600
											30 FR HLV	1360
											40 FR HLV	1360
10.0/75 - 15.3	9.00	-	274	760	343	2227	STD	10	TT	128 A6/123 A8	bar	5.20
											km/h	1800
											30 FR HLV	1550
											40 FR HLV	1550
10.0/75 - 15.3	9.00	-	274	760	343	2227	STD	10	TL	128 A6/123 A8	bar	5.20
											km/h	1800
											30 FR HLV	1550
											40 FR HLV	1550
10.0/75 - 15.3	9.00	-	274	760	343	2227	STD	12	TT	132 A6/126 A8	bar	6.40
											km/h	2000
											30 FR HLV	1700
											40 FR HLV	1700
10.0/75 - 15.3	9.00	-	274	760	343	2227	STD	12	TL	132 A6/126 A8	bar	6.40
											km/h	2000
											30 FR HLV	1700
											40 FR HLV	1700
10.0/75 - 15.3	9.00	-	274	760	343	2227	STD	14	TT	136 A6/130 A8	bar	7.10
											km/h	2240
											30 FR HLV	1900
											40 FR HLV	1900

STD: Standard
AB: Aramid belted version
SPL: Special version ②

Tolerances: O.D. ± 2% - S.W. ± 2% - RC ± 2.5%



**MAIN APPLICATION:
IMPLEMENT**



AW 702

AW 702 has been developed for implement machinery and trailers in soil tillage and transport applications. This heavy-duty tire has been designed by BKT to provide a new level of durability. AW 702 is available in different versions to meet specific end-user needs.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)		
	Rec.	Alt.									bar	km/h	30 FR HLV
15.3" 10.0/75 - 15.3	9.00	-	274	760	343	2227	STD	14	TL	136 A6/130 A8	7.10	2240	1900
											bar	km/h	30 FR HLV
											40 FR HLV		
10.0/75 - 15.3	9.00	-	274	760	343	2227	STD	18	TL	142 A6/138 A8	7.10	2650	2360
											bar	km/h	30 FR HLV
											40 FR HLV		
11.5/80 - 15.3	9.00	-	297	844	370	2473	STD	10	TT	137 A6/131 A8	4.60	2300	1950
											bar	km/h	30 FR HLV
											40 FR HLV		
11.5/80 - 15.3	9.00	-	297	844	370	2473	STD	10	TL	137 A6/131 A8	4.60	2300	1950
											bar	km/h	30 FR HLV
											40 FR HLV		
11.5/80 - 15.3	9.00	-	297	844	370	2473	STD	12	TT	141 A6/135 A8	5.60	2575	2180
											bar	km/h	30 FR HLV
											40 FR HLV		
11.5/80 - 15.3	9.00	-	297	844	370	2473	STD	12	TL	141 A6/135 A8	5.60	2575	2180
											bar	km/h	30 FR HLV
											40 FR HLV		
11.5/80 - 15.3	9.00	-	297	844	370	2473	STD	14	TT	145 A6/139 A8	6.50	2900	2430
											bar	km/h	30 FR HLV
											40 FR HLV		
11.5/80 - 15.3	9.00	-	297	844	370	2473	STD	14	TL	145 A6/139 A8	6.50	2900	2430
											bar	km/h	30 FR HLV
											40 FR HLV		
11.5/80 - 15.3	9.00	-	297	844	370	2473	AB	14	TL	145 A6/139 A8	6.50	2900	2430
											bar	km/h	30 FR HLV
											40 FR HLV		
11.5/80 - 15.3	9.00	-	297	844	370	2473	STD	16	TT	147 A6/141 A8	7.10	3075	2575
											bar	km/h	30 FR HLV
											40 FR HLV		
11.5/80 - 15.3	9.00	-	297	844	370	2473	STD	18	TT	149 A6/145 A8	7.10	3250	2900
											bar	km/h	30 FR HLV
											40 FR HLV		

STD: Standard
AB: Aramid belted version



MAIN APPLICATION:
IMPLEMENT



AW 702

AW 702 has been developed for implement machinery and trailers in soil tillage and transport applications. This heavy-duty tire has been designed by BKT to provide a new level of durability. AW 702 is available in different versions to meet specific end-user needs.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)	
	Rec.	Alt.									bar	km/h
15.3"	9.00	-	297	844	370	2473	STD	18	TL	149 A6/145 A8	bar	7.10
											km/h	3250
											30 FR HLV	2900
											40 FR HLV	2900
12.5/80 - 15.3	9.00	-	312	885	387	2593	STD	14	TT	147 A6/142 A8	bar	5.80
											km/h	3075
											30 FR HLV	2650
											40 FR HLV	2650
12.5/80 - 15.3	9.00	-	312	885	387	2593	STD	14	TL	147 A6/142 A8	bar	5.80
											km/h	3075
											30 FR HLV	2650
											40 FR HLV	2650
12.5/80 - 15.3	9.00	-	312	885	387	2593	STD	16	TT	150 A6/144 A8	bar	6.50
											km/h	3350
											30 FR HLV	2800
											40 FR HLV	2800
16"	4.00 E	4.50 E; 4½ K	169	722	337	2150	STD	6	TT	101 A6/98 A8	bar	3.70
											km/h	825
											30 FR HLV	750
											40 FR HLV	750
6.00 - 16	4.00 E	4.50 E; 4½ K	169	722	337	2150	STD	6	TL	101 A6/98 A8	bar	3.70
											km/h	825
											30 FR HLV	750
											40 FR HLV	750
6.00 - 16	4.00 E	4.50 E; 4½ K	169	722	337	2150	STD	8	TT	110 A6/ 106 A8	bar	5.40
											km/h	1060
											30 FR HLV	950
											40 FR HLV	950
10.50 - 16	6.00 T	-	305	975	445	2986	STD	14	TT	-	bar	6.90
											km/h	3215
											50	3215
											40 FR HLV	3215
10.5/65 - 16	W 9	W 8; W 8 L	274	755	343	2112	STD	10	TT	129 A6/123 A8	bar	5.20
											km/h	1850
											30 FR HLV	1550
											40 FR HLV	1550
10.5/65 - 16	W 9	W 8; W 8 L	274	755	343	2112	STD	10	TL	129 A6/123 A8	bar	5.20
											km/h	1850
											30 FR HLV	1550
											40 FR HLV	1550
10.5/65 - 16	W 9	W 8; W 8 L	274	755	343	2112	SPL	10	TL	129 A6/123 A8	bar	5.20
											km/h	1850
											30 FR HLV	1550
											40 FR HLV	1550

STD: Standard
SPL: Special version ②

Tolerances: O.D. ± 2% - S.W. ± 2% - RC ± 2.5%



MAIN APPLICATION:
IMPLEMENT



AW 702

AW 702 has been developed for implement machinery and trailers in soil tillage and transport applications. This heavy-duty tire has been designed by BKT to provide a new level of durability. AW 702 is available in different versions to meet specific end-user needs.



CUT & CHIP RESISTANCE



DURABILITY



HEAVY DUTY SERVICE



FREE ROLLING APPLICATION



HIGH PUNCTURE RESISTANCE

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)			
	Rec.	Alt.									↓			
16"	10.5/65 - 16	W 9	W 8; W 8 L	274	755	343	2112	STD	14	TT	137 A6/130 A8	km/h	7.10	
												mph		
												30 FR HLV	2300	
												40 FR HLV	1900	
	10.5/65 - 16	W 9	W 8; W 8 L	274	755	343	2112	STD	14	TL	137 A6/130 A8	km/h	7.10	
												mph		
												30 FR HLV	2300	
10.5/65 - 16	W 9	W 8; W 8 L	274	755	343	2112	IND	14	TL	137 A6/130 A8	km/h	7.10		
											mph			
											30 FR HLV	2300		
13.0/55 - 16	11.0	-	336	770	345	2256	STD	12	TL	136 A6/133 A8	km/h	4.90		
											mph			
											30 FR HLV	2240		
											40 FR HLV	2060		
13.0/55 - 16	11.0	-	336	770	345	2256	STD	14	TL	139 A6/136 A8	km/h	5.80		
											mph			
											30 FR HLV	2430		
13.0/55 - 16	11.0	-	336	770	345	2256	STD	18	TL	149 A6/146 A8	km/h	7.10		
											mph			
											30 FR HLV	3250		
13.0/75 - 16	11.0	9; W 9; W 11	340	890	396	2726	STD	10	TL	142 A6/138 A8	km/h	4.10		
											mph			
											30 FR HLV	2650		
											40 FR HLV	2360		
18"	10.5/80 - 18	W 9	W 8; 9	275	885	395	2593	STD	10	TL	138 A6/131 A8	km/h	5.00	
												mph		
												30 FR HLV	2360	
	10.5/80 - 18	W 9	W 8; 9	275	885	395	2593	STD	14	TL	144 A6/138 A8	km/h	7.00	
												mph		
												30 FR HLV	2800	
	12.5/80 - 18	W 9	11	308	965	432	2827	STD	10	TL	145 A6/139 A8	km/h	4.10	
mph														
30 FR HLV												2900		
												40 FR HLV	2430	

STD: Standard
IND: Industrial ①



MAIN APPLICATION:
IMPLEMENT



AW 702

AW 702 has been developed for implement machinery and trailers in soil tillage and transport applications. This heavy-duty tire has been designed by BKT to provide a new level of durability. AW 702 is available in different versions to meet specific end-user needs.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)	
	Rec.	Alt.									↓	
18" 12.5/80 - 18	W 9	11	308	965	432	2827	STD	12	TL	148 A6/142 A8	bar	5.00
											mph	
											30 FR HLV	3150
											40 FR HLV	2650
12.5/80 - 18	W 9	11	308	965	432	2827	STD	14	TL	152 A6/146 A8	km/h	5.90
											mph	
											30 FR HLV	3550
											40 FR HLV	3000
12.5/80 - 18	W 9	11	308	965	432	2827	SPL	14	TL	152 A6/146 A8	km/h	5.90
											mph	
											30 FR HLV	3550
											40 FR HLV	3000
12.5/80 - 18	W 9	11	308	965	432	2827	STD	16	TL	154 A6/150 A8	km/h	6.70
											mph	
											30 FR HLV	3750
											40 FR HLV	3350
12.5/80 - 18	W 9	11	308	965	432	2827	SPL	16	TL	154 A6/150 A8	km/h	6.70
											mph	
											30 FR HLV	3750
											40 FR HLV	3350
12.5/80 - 18	W 9	11	308	965	432	2827	STD	18	TL	156 A6/152 A8	km/h	7.20
											mph	
											30 FR HLV	4000
											40 FR HLV	3550
13.0/65 - 18	11.0	-	336	890	398	2608	STD	14	TT	147 A6/141 A8	km/h	5.80
											mph	
											30 FR HLV	3075
											40 FR HLV	2575
13.0/65 - 18	11.0	-	336	890	398	2608	STD	14	TL	147 A6/141 A8	km/h	5.80
											mph	
											30 FR HLV	3075
											40 FR HLV	2575
13.0/65 - 18	11.0	-	336	890	398	2608	STD	16	TL	150 A6/144 A8	km/h	6.70
											mph	
											30 FR HLV	3350
											40 FR HLV	2800
14.5/80 - 18	11.0	12; 13	362	1047	446	3068	STD	12	TT	155 A8	km/h	4.50
											mph	
											30 FR HLV	3875
											40 FR HLV	3875

STD: Standard
SPL: Special version ②



MAIN APPLICATION:
IMPLEMENT



AW 705

AW 705 has been developed for implement machinery and trailers in soil tillage and transport applications. It is ideal for modern farming both on and off the road. AW 705 is available also in a "special" version, which offers improved durability.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)			
	Rec.	Alt.									bar	km/h	40 FR HLV	
16"	14.0/65 - 16	11.0	-	353	870	388	2549	STD	10	TT	140 A6/ 136 A8	bar	3.70	
												km/h		2500
												30 FR HLV		2240
												40 FR HLV		
14.0/65 - 16	11.0	-	353	870	388	2549	STD	10	TL	140 A6/ 136 A8	bar	3.70		
											km/h		2500	
											30 FR HLV		2240	
											40 FR HLV			
14.0/65 - 16	11.0	-	353	870	388	2549	STD	14	TT	148 A6/145 A8	bar	5.50		
											km/h		3150	
											30 FR HLV		2900	
											40 FR HLV			
14.0/65 - 16	11.0	-	353	870	388	2549	STD	14	TL	148 A6/145 A8	bar	5.50		
											km/h		3150	
											30 FR HLV		2900	
											40 FR HLV			
17"	15.0/55 - 17	13.00	13;W 13	391	850	377	2490	STD	10	TL	141 A6/134 A8	bar	3.60	
												km/h		2575
												30 FR HLV		2120
												40 FR HLV		
15.0/55 - 17	13.00	13;W 13	391	850	377	2490	STD	12	TL	144 A6/138 A8	bar	4.20		
											km/h		2800	
											30 FR HLV		2360	
											40 FR HLV			
15.0/55 - 17	13.00	13;W 13	391	850	377	2490	STD	14	TL	147 A6/141 A8	bar	4.90		
											km/h		3075	
											30 FR HLV		2575	
											40 FR HLV			
15.0/55 - 17	13.00	13;W 13	391	850	377	2490	STD	18	TL	152 A6/149 A8	bar	6.50		
											km/h		3550	
											30 FR HLV		3250	
											40 FR HLV			
18"	15.0/70 - 18	13.00	13;W 13	391	990	442	2901	STD	12	TL	151 A6/145 A8	bar	4.20	
												km/h		3450
												30 FR HLV		2900
												40 FR HLV		

STD: Standard



MAIN APPLICATION:
IMPLEMENT



AW 705

AW 705 has been developed for implement machinery and trailers in soil tillage and transport applications. It is ideal for modern farming both on and off the road. AW 705 is available also in a "special" version, which offers improved durability.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)		
	Rec.	Alt.									↓		
18"	15.0/70 - 18	13.00	13; W 13	391	990	442	2901	STD	14	TL	154 A6/148 A8	bar	4.90
												km/h	
												30 FR HLV	3750
18"	15.0/70 - 18	13.00	13; W 13	391	990	442	2901	STD	16	TL	157 A6/151 A8	bar	5.60
												km/h	
												30 FR HLV	4125
20"	16.0/70 - 20	13.0	12 SDC 13 SDC; 14	408	1075	480	3155	STD	12	TT	157 A6/151 A8	bar	4.10
												km/h	
												30 FR HLV	4125
20"	16.0/70 - 20	13.0	12 SDC; 13 SDC; 14	408	1075	480	3155	STD	12	TL	157 A6/151 A8	bar	4.10
												km/h	
												30 FR HLV	4125
20"	16.0/70 - 20	13.0	12 SDC; 13 SDC; 14	408	1075	480	3155	STD	14	TT	160 A6/156 A8	bar	4.80
												km/h	
												30 FR HLV	4500
20"	16.0/70 - 20	13.0	12 SDC; 13 SDC; 14	408	1075	480	3155	STD	14	TL	160 A6/156 A8	bar	4.80
												km/h	
												30 FR HLV	4500
20"	16.0/70 - 20	13.0	12 SDC; 13 SDC; 14	408	1075	480	3155	SPL	14	TL	160 A6/156 A8	bar	4.80
												km/h	
												30 FR HLV	4500
20"	16.0/70 - 20	13.0	12 SDC; 13 SDC; 14	408	1075	480	3155	STD	16	TL	162 A6/159 A8	bar	5.50
												km/h	
												30 FR HLV	4750
22.5"	400/55 - 22.5	AG 11.75	12.25; AG 13.00	405	1016	443	3072	STD	18	TL	154 A8/150 B	bar	4.50
												km/h	
												40	3750
												50	3350

STD: Standard
SPL: Special version ①



MAIN APPLICATION:
IMPLEMENT



AW 708

AW 708 has been developed for soil tillage, transport and hay harvesting applications with implement machinery, trailers and hay harvesters/balers. It is ideal for modern farming both on and off the road.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)		
	Rec.	Alt.									bar	km/h	40 FR HLV
15.5"	AG 13.00	-	405	875	380	2564	STD	10	TL	143 A6/136 A8	bar	3.60	
											km/h		2725
											30 FR HLV		2240
											40 FR HLV		
400/60 - 15.5	AG 13.00	-	405	875	380	2564	STD	14	TT	149 A6/143 A8	bar	4.90	
											km/h		3250
											30 FR HLV		2725
											40 FR HLV		
400/60 - 15.5	AG 13.00	-	405	875	380	2564	STD	14	TL	149 A6/143 A8	bar	4.90	
											km/h		3250
											30 FR HLV		2725
											40 FR HLV		
400/60 - 15.5	AG 13.00	-	405	875	380	2564	STD	18	TL	155 A6/149 A8	bar	6.20	
											km/h		3875
											30 FR HLV		3250
											40 FR HLV		
17"	16.00	-	491	866	380	2536	STD	10	TL	144 A6/138 A8	bar	3.00	
											km/h		2800
											30 FR HLV		2360
											40 FR HLV		
19.0/45 - 17	16.00	-	491	866	380	2536	STD	14	TL	150 A6/144 A8	bar	3.90	
											km/h		3350
											30 FR HLV		2800
											40 FR HLV		
19.0/45 - 17	16.00	-	491	866	380	2536	STD	18	TL	160 A6/156 A8	bar	4.50	
											km/h		4500
											30 FR HLV		4000
											40 FR HLV		
500/50 - 17	16.00	-	500	945	416	2750	STD	10	TL	149 A6/145 A8	bar	2.70	
											km/h		3250
											30 FR HLV		2900
											40 FR HLV		
500/50 - 17	16.00	-	500	945	416	2750	STD	14	TL	155 A6/152 A8	bar	3.80	
											km/h		3875
											30 FR HLV		3550
											40 FR HLV		
500/50 - 17	16.00	-	500	945	416	2750	STD	16	TL	158 A6/155 A8	bar	4.40	
											km/h		4250
											30 FR HLV		3875
											40 FR HLV		
500/50 - 17	16.00	-	500	945	416	2750	STD	18	TL	160 A6/157 A8	bar	4.80	
											km/h		4500
											30 FR HLV		4125
											40 FR HLV		
500/65 - 17	16.0	-	520	1070	462	3135	STD	18	TL	167 A6/161 A8	bar	4.80	
											km/h		5450
											30 FR HLV		4625
											40 FR HLV		

STD: Standard



MAIN APPLICATION:
IMPLEMENT



AW 909

AW 909 has been developed for soil tillage and transport applications with implement machinery and trailers. It is ideal for modern farming both on and off the road. Besides, it provides a high level of handling comfort.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)		
	Rec.	Alt.									bar	km/h	
12"	10.0/80 - 12	9.00	7.0	264	710	313	2080	STD	8	TL	122 A6/116 A8	bar	4.20
												km/h	1500
												30 FR HLV	1250
10.0/80 - 12	9.00	7.0	264	710	313	2080	STD	10	TL	126 A6/121 A8	bar	5.40	
											km/h	1700	
											30 FR HLV	1450	
15.3"	10.0/75 - 15.3	9.00	-	274	760	343	2227	STD	10	TL	128 A6/123 A8	bar	5.20
												km/h	1800
												30 FR HLV	1550
10.0/75 - 15.3	9.00	-	274	760	343	2227	STD	12	TL	132 A6/128 A8	bar	6.40	
											km/h	2000	
											30 FR HLV	1700	
10.0/75 - 15.3	9.00	-	274	760	343	2227	STD	14	TL	136 A6/130 A8	bar	7.10	
											km/h	2240	
											30 FR HLV	1900	
10.0/75 - 15.3	9.00	-	274	760	343	2227	STD	18	TL	142 A6/138 A8	bar	7.10	
											km/h	2650	
											30 FR HLV	2360	
11.5/80 - 15.3	9.00	-	297	844	370	2473	STD	10	TL	137 A6/131 A8	bar	4.60	
											km/h	2300	
											30 FR HLV	1950	
11.5/80 - 15.3	9.00	-	297	844	370	2473	STD	12	TL	141 A6/135 A8	bar	5.60	
											km/h	2575	
											30 FR HLV	2180	
11.5/80 - 15.3	9.00	-	297	844	370	2473	STD	14	TL	145 A6/139 A8	bar	6.50	
											km/h	2900	
											30 FR HLV	2430	
11.5/80 - 15.3	9.00	-	297	844	370	2473	STD	16	TT	147 A6/141 A8	bar	7.10	
											km/h	3075	
											30 FR HLV	2575	

STD: Standard

Tolerances: O.D. ± 2% - S.W. ± 2% - RC ± 2.5%



**MAIN APPLICATION:
IMPLEMENT**



AW 909

AW 909 has been developed for soil tillage and transport applications with implement machinery and trailers. It is ideal for modern farming both on and off the road. Besides, it provides a high level of handling comfort.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)	
	Rec.	Alt.									bar	km/h
15.3" 11.5/80 - 15.3	9.00	-	297	844	370	2473	STD	16	TL	147 A6/141 A8	bar	7.10
											km/h	3075
											30 FR HLV	2575
11.5/80 - 15.3	9.00	-	297	844	370	2473	STD	18	TL	149 A6/145 A8	bar	7.10
											km/h	3250
											30 FR HLV	2900
12.5/80 - 15.3	9.00	-	312	885	387	2593	STD	14	TL	147 A6/142 A8	bar	5.80
											km/h	3075
											30 FR HLV	2650
17" 15.0/55 - 17	13.00	13	391	850	377	2490	STD	10	TL	141 A6/134 A8	bar	3.60
											km/h	2575
											30 FR HLV	2120
15.0/55 - 17	13.00	13	391	850	377	2490	STD	12	TL	144 A6/138 A8	bar	4.20
											km/h	2800
											30 FR HLV	2360
15.0/55 - 17	13.00	13	391	850	377	2490	STD	14	TL	147 A6/141 A8	bar	4.90
											km/h	3075
											30 FR HLV	2575

STD: Standard



MAIN APPLICATION:
IMPLEMENT



AW 09

AW 09 has been developed for soil tillage and transport applications with implement machinery and trailers. It is ideal for modern farming both on and off the road. AW 09 is the right tire to be used in all operating conditions which require excellent handling features.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	L.S.I. Free Rolling	L.S.I. Drive Wheel	LOAD CAPACITY (KG/TIRE)		
	Rec.	Alt.										↓	↓	
15.3"	260/70 - 15.3	9.00	-	268	753	335	2206	STD	-	TL	110 A8	122 A8	bar	3.20
													km/h	1500
													40 DW LLV	1060
15.3"	260/70 - 15.3	9.00	-	268	753	335	2206	STD	-	TL	114 A8	126 A8	bar	3.60
													km/h	1700
													40 DW LLV	1180
15.3"	260/70 - 15.3	9.00	-	268	753	335	2206	STD	-	TL	119 A8	131 A8	bar	5.00
													km/h	1950
													40 DW LLV	1360
15.3"	300/80 - 15.3	9.00	-	295	860	376	2520	STD	-	TL	120 A8	132 A8	bar	2.80
													km/h	2000
													40 DW LLV	1400
15.3"	300/80 - 15.3	9.00	-	295	860	376	2520	STD	-	TL	126 A8	138 A8	bar	3.60
													km/h	2360
													40 DW LLV	1700
15.3"	300/80 - 15.3	9.00	-	295	860	376	2520	STD	-	TL	129 A8	141 A8	bar	4.00
													km/h	2575
													40 DW LLV	1850
15.3"	320/80 - 15.3	9.00	-	309	901	392	2640	STD	-	TL	133 A8	145 A8	bar	4.00
													km/h	2900
													40 DW LLV	2060
15.5"	400/60 - 15.5	AG 13.00	-	404	874	382	2561	STD	-	TL	132 A8	145 A8	bar	3.60
													km/h	2900
													40 DW LLV	2000
17"	380/55 - 17	13.00	-	390	850	377	2491	STD	-	TL	125 A8	138 A8	bar	2.80
													km/h	2360
													40 DW LLV	1650
17"	380/55 - 17	13.00	-	390	850	377	2491	STD	-	TL	128 A8	141 A8	bar	3.20
													km/h	2575
													40 DW LLV	1800

STD: Standard

Tolerances: O.D. ± 2% - S.W. ± 2% - RC ± 2.5%



MAIN APPLICATION:
IMPLEMENT



RIB IMPLEMENT

RIB IMPLEMENT has been engineered for trailers and implement machinery in transport and soil tillage applications. It is ideal for modern farming and shows top performance both on and off the road. RIB IMPLEMENT is the right choice for all operating conditions which require a high level of handling as well as reduced soil compaction to preserve the crops.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)	
	Rec.	Alt.									↓	
12" 10.0/80 - 12	9.00	7.0	264	746	329	2186	STD	6	TL	117 A6/110 A8	bar	3.20
											km/h	
											30 FR HLW	1285
											40 FR HLW	1060
17" 49 - 17	13.0	14.0	264	746	329	2186	STD	20	TL	-	bar	4.0
											km/h	
											40 FR	4250
											50 FR	3750
											40 DW	3000
											50 DW	2725

STD: Standard



RIB 713 (I-1)

RIB 713 is a steel-belted tire for agricultural implements. As a response to the increasing awareness of low soil compaction in modern farming, RIB 713 has been designed with IF technology. This enables the tire to carry heavier loads at lower inflation pressures and provides a larger footprint with uniform weight distribution. The steel-belted structure provides excellent puncture resistance and hence increased protection against stub penetration and relative damages, even if running into strong stubble. In addition, "D" speed rating (65 km/h – 40 mph) allows for fast road transfers. RIB 713 is BKT's contribution to maximize both the productivity and efficiency of your farming business.



SIZE	LI/SS	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	SRI (index)	Version	LOAD CAPACITY (KG/TIRE)																			
		Rec.	Alt.							↓																			
15" IF 280/70 R 15	128 D	8	-	279	779	347	2356	360	STD	bar	0.6	0.8	1.0	1.2	1.4	1.6	2.0	2.4	2.8	3.2	3.6								
										km/h																			
										From 10 to 65	670	775	885	1010	1120	1225	1335	1425	1570	1695	1800								

STD: Standard



MAIN APPLICATION:
IMPLEMENT



RIB 774 (A)

RIB 774 (A) is a low section implement tire offering high load capacity with minimum soil compaction. It is ideal for modern farming and suitable for on- and off-the-road applications.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)	
	Rec.	Alt.									↓	
17" 15.0/55 - 17	13.00	13	391	850	377	2490	STD	10	TL	141 A6/134 A8	bar	3.60
											km/h	
											30 FR HLV	
											40 FR HLV	
15.0/55 - 17	13.00	13	391	850	377	2490	STD	14	TL	147 A6/141 A8	bar	4.90
											km/h	
											30 FR HLV	
											40 FR HLV	

STD: Standard



MAIN APPLICATION:
IMPLEMENT



RIB 774 (B)

RIB 774 (B) is a low section implement tire. It is ideal for modern farming and suitable for on- and off-the-road applications.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)		
	Rec.	Alt.									↓		
14.5" 200/60 - 14.5	6.75	4.50 E; 5.50 F	210	610	278	1785	STD	10	TT	113 A6/109 A8	bar	6.90	
											km/h	1150	
											30 FR HLV	1030	
200/60 - 14.5	6.75	4.50 E; 5.50 F	210	610	278	1785	STD	10	TL	113 A6/109 A8	bar	6.90	
											km/h	1150	
											40 FR HLV	1030	
200/60 - 14.5	6.75	4.50 E; 5.50 F	210	610	278	1785	STD	14	TT	115 A6/111 A8	bar	7.10	
											km/h	1215	
											40 FR HLV	1090	
200/60 - 14.5	6.75	4.50 E; 5.50 F	210	610	278	1785	STD	14	TL	115 A6/111 A8	bar	7.10	
											km/h	1215	
											40 FR HLV	1090	
250/65 - 14.5	AG 8.00	6.75	255	675	303	1978	STD	12	TL	125 A6/123 A8	bar	6.50	
											km/h	1650	
											40 FR HLV	1550	
250/65 - 14.5	AG 8.00	6.75	255	675	303	1978	STD	14	TL	130 A6/126 A8	bar	7.50	
											km/h	1900	
											40 FR HLV	1700	
16" 10.5/65 - 16	W 9	W 8 L	265	745	339	2183	STD	14	TT	137 A6/130 A8	bar	7.10	
											km/h	2300	
											40 FR HLV	1900	
10.5/65 - 16	W 9	W 8 L	265	745	339	2183	IND	14	TT	137 A6/130 A8	bar	7.10	
											km/h	2300	
											40 HLV	1900	
18" 12.0 - 18 (340/70 - 18)	11.0	-	342	902	414	2688	STD	16	TL	156 A6/153 A8	bar	7.10	
											km/h	4000	
											40 FR HLV	3650	

STD: Standard
IND: Industrial



MAIN APPLICATION:
IMPLEMENT



RIB 774 (C)

RIB 774 (C) is a low section and narrow width implement tire. It is ideal for modern farming and suitable for on- and off-the-road applications.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)		
	Rec.	Alt.									bar	km/h	
17"	19.0/45 - 17	16.00	-	455	845	387	2518	STD	10	TT	144 A6/138 A8	bar	3.00
												km/h	
												30 FR HLV	2800
												40 FR HLV	2360
17.5"	215/75 - 17.5	6.75	-	220	775	360	2310	STD	12	TL	138 A8/134 A6	bar	6.90
												km/h	
												30 FR HLV	2360
												40 FR HLV	2120
	215/75 - 17.5	6.75	-	220	775	360	2310	STD	16	TL	149 A6/145 A8	bar	9.00
												km/h	
												30 FR HLV	2900
												40 FR HLV	2650
	225/75 - 17.5	6.75	-	220	775	360	2310	STD	12	TL	142 A6/139 A8	bar	6.50
												km/h	
												30 FR HLV	2650
												40 FR HLV	2430
	225/75 - 17.5	6.75	-	220	775	360	2310	STD	16	TL	148 A6/145 A8	bar	9.00
												km/h	
												30 FR HLV	3150
												40 FR HLV	2900

STD: Standard



**MAIN APPLICATION:
IMPLEMENT**



RIB 775

RIB 775 is a low-section cross-ply tire for transport and soil tillage applications with trailers and implement machinery. It offers excellent handling as well as reduced soil compaction.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)	
	Rec.	Alt.									↓	
12" 300/65 - 12	9.0	-	305	685	304	2007	STD	8	TL	122 A6/119 A8	bar	3.60
											km/h	
											30 FR HLV	1500
											40 FR HLV	1360

STD: Standard



RIB 900

RIB 900 is suitable for transport, soil tillage and hay harvesting operations with trailers, implement machinery and hay harvesters/balers. It offers excellent handling as well as reduced soil compaction.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)	
	Rec.	Alt.									↓	
15.5" 400/60 - 15.5	AG 13.00	-	405	875	380	2564	STD	10	TL	143 A6/136 A8	bar	3.50
											km/h	
											30 FR HLV	2725
											40 FR HLV	2240
400/60 - 15.5	AG 13.00	-	405	875	380	2564	STD	14	TL	149 A6/143 A8	bar	4.90
											km/h	
											30 FR HLV	3250
											40 FR HLV	2725
400/60 - 15.5	AG 13.00	-	405	875	380	2564	STD	16	TL	153 A6/147 A8	bar	5.50
											km/h	
											30 FR HLV	3650
											40 FR HLV	3075

STD: Standard



MAIN APPLICATION:
IMPLEMENT



RIB MASTER

RIB MASTER is suitable for transport and soil tillage operations with trailers and implement machinery. This tire is ideal in all operating conditions that require excellent handling.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)	
	Rec.	Alt.									↓	
17.5" 215/75 - 17.5	6.75	-	220	775	360	2310	STD	16	TL	143 A6/140 A8	bar	9.00
											km/h	2725
											30 FR HLV	2500
											40 FR HLV	2500

STD: Standard



FLOTATION RIB IMPLEMENT

FLOTATION RIB IMPLEMENT is a rib pattern tire for trailers in transport applications. It features high flotation capability and ensures significant fuel savings to boost the productivity of your business.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)	
	Rec.	Alt.									↓	
15" 31 X 13.50 - 15	10 LB	-	360	780	359	2129	STD	12	TL	-	bar	5.20
											km/h	1600
											50	1600

STD: Standard



MAIN APPLICATION:
IMPLEMENT



MULTI RIB

MULTI RIB is an agro-industrial tire for soil tillage and transport applications with 2WD tractors, trailers, and implement machinery. It offers excellent handling throughout its long product life-cycle.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 40 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
16" 11.00 - 16	W10 L	W 8; W 8 L	315	930	-	-	STD	12	TL	-	4.10	1550

STD: Standard



AS 504

AS 504 is an agro-industrial tire mainly designed for transport and soil tillage operations. In some sizes, AS 504 is suitable for loading and hay harvesting applications. This tire, which features excellent self-cleaning properties and increased grip, is ideal for muddy grounds. There are several versions of the AS 504 tire to meet specific end-user requirements.



SIZE	RIM		S.W. (in.)	O.D. (in.)	SLR (in.)	RC (in.)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)		
	Rec.	Alt.									↓		
											bar	km/h	
12" 6.5/80 - 12	5 J	5 JA	163	588	273	1743	STD	4	TT	90 A6/87 A8	bar	2.40	3.10
											km/h	2.40	3.10
											30 FR LLV	500	-
											30 DW LLV	355	-
											40 FR HLV	-	600
40 FR HLV	-	545											
6.5/80 - 12	5 J	5 JA	163	588	273	1743	STD	4	TL	90 A6/87 A8	bar	2.40	3.10
											km/h	2.40	3.10
											30 FR LLV	500	-
											30 DW LLV	355	-
											40 FR HLV	-	600
40 FR HLV	-	545											
6.5/80 - 12	5 J	5 JA	163	588	273	1743	STD	6	TT	99 A6/96 A8	bar	3.60	4.90
											km/h	3.60	4.90
											30 FR LLV	650	-
											30 DW LLV	450	-
											40 FR HLV	-	775
40 FR HLV	-	710											

STD: Standard



MAIN APPLICATION:
IMPLEMENT



AS 504

AS 504 is an agro-industrial tire mainly designed for transport and soil tillage operations. In some sizes, AS 504 is suitable for loading and hay harvesting applications. This tire, which features excellent self-cleaning properties and increased grip, is ideal for muddy grounds. There are several versions of the AS 504 tire to meet specific end-user requirements.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)	
	Rec.	Alt.									↓	
12" 6.5/80 - 12	5 J	5 JA	163	588	273	1743	STD	6	TL	99 A6/96 A8	bar	4.90
											km/h	3.60
											30 FR LLV	650
											30 DW LLV	450
											30 FR HLV	775
											40 FR HLV	710
											bar	2.40
km/h	1.70											
7.00 - 12	4.5	-	187	683	300	2001	STD	4	TT	94 A6/88 A8	bar	2.40
											km/h	1.70
											30 FR LLV	560
											30 DW LLV	385
											30 FR HLV	670
											40 FR HLV	560
											bar	2.40
km/h	1.70											
7.00 - 12	4.5	-	187	683	300	2001	STD	4	TL	94 A6/88 A8	bar	3.40
											km/h	2.50
											30 FR LLV	690
											30 DW LLV	485
											30 FR HLV	825
											40 FR HLV	690
											bar	4.50
km/h	3.30											
11.0/65 - 12	9.00	-	273	700	321	2072	STD	8	TT	120 A6/ 116 A8	bar	4.00
											km/h	2.90
											30 FR LLV	1180
											30 DW LLV	825
											30 FR HLV	1400
											40 FR HLV	1250
											bar	4.00
km/h	2.90											
11.0/65 - 12	9.00	-	273	700	321	2072	STD	8	TL	120 A6/ 116 A8	bar	4.00
											km/h	2.90
											30 FR LLV	1180
											30 DW LLV	825
											30 FR HLV	1400
											40 FR HLV	1250
											bar	4.00
km/h	2.90											

SPL: Special version ③
STD: Standard

Tolerances: O.D. ± 2% - S.W. ± 2% - RC ± 2.5%



**MAIN APPLICATION:
IMPLEMENT**



AS 504

AS 504 is an agro-industrial tire mainly designed for transport and soil tillage operations. In some sizes, AS 504 is suitable for loading and hay harvesting applications. This tire, which features excellent self-cleaning properties and increased grip, is ideal for muddy grounds. There are several versions of the AS 504 tire to meet specific end-user requirements.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)			
	Rec.	Alt.									↓			
15"	5.00 - 15	3.50 D	3.00 D; 4.00 E; 4 J	140	657	308	1957	STD	4	TT	86 A6/82 A8	bar	2.30	3.20
												km/h		
												30 FR LLV	435	-
												30 DW LLV	305	-
												30 FR HLV	-	530
												40 FR HLV	-	475
	5.00 - 15	3.50 D	3.00 D; 4.00 E; 4 J	140	657	308	1957	STD	6	TT	94 A6/90 A8	bar	3.50	4.80
												km/h		
												30 FR LLV	560	-
												30 DW LLV	385	-
7.5L - 15	6 LB	5 K; 5 J; 5 K	210	765	354	2280	STD	6	TT	116 A6/112 A8	bar	3.10	4.30	
											km/h			
											30 FR LLV	1030	-	
											30 DW LLV	730	-	
7.5L - 15	6 LB	5 K; 5½ J; 5½ K	210	765	354	2280	STD	8	TT	119 A6/115 A8	bar	3.70	5.00	
											km/h			
											30 FR LLV	1150	-	
											30 DW LLV	800	-	
7.5L - 15	6 LB	5 K; 5½ J; 5½ K	210	765	354	2280	STD	8	TL	119 A6/115 A8	bar	3.70	5.00	
											km/h			
											30 FR LLV	1150	-	
											30 DW LLV	800	-	
7.5L - 15	6 LB	5 K; 5½ J; 5½ K	210	765	354	2280	HD	8	TT	119 A6/115 A8	bar	3.70	5.00	
											km/h			
											30 FR LLV	1150	-	
											30 DW LLV	800	-	
15.3"	10.0/75 - 15.3	9.00	-	264	780	345	2285	STD	8	TT	124 A6/119 A8	bar	3.10	4.20
												km/h		
												30 FR LLV	1360	-
												30 DW LLV	950	-
												30 FR HLV	-	1600
												40 FR HLV	-	1360

STD: Standard
HD: Heavy Duty Version ①



MAIN APPLICATION:
IMPLEMENT



AS 504

AS 504 is an agro-industrial tire mainly designed for transport and soil tillage operations. In some sizes, AS 504 is suitable for loading and hay harvesting applications. This tire, which features excellent self-cleaning properties and increased grip, is ideal for muddy grounds. There are several versions of the AS 504 tire to meet specific end-user requirements.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)		
	Rec.	Alt.											
15.3" 10.0/75 - 15.3	9.00	-	264	780	345	2285	STD	8	TL	124 A6/119 A8	bar	3.10	4.20
											km/h		
											30 FR LLV	1360	-
											30 DW LLV	950	-
											30 FR HLV	-	1600
											40 FR HLV	-	1360
											bar	3.10	4.20
km/h													
30 FR LLV	1360	-											
30 DW LLV	950	-											
30 FR HLV	-	1600											
40 FR HLV	-	1360											
10.0/75 - 15.3	9.00	-	264	780	345	2285	IND	8	TL	124 A6/119 A8	bar	3.90	5.20
											km/h		
											30 FR LLV	1550	-
											30 DW LLV	1090	-
											30 FR HLV	-	1800
											40 FR HLV	-	1550
											bar	5.50	7.10
km/h													
30 FR LLV	1900	-											
30 DW LLV	1320	-											
30 FR HLV	-	2240											
40 FR HLV	-	1900											
10.0/75 - 15.3	9.00	-	264	780	345	2285	STD	18	TT	142 A6/138 A8	bar	7.10	7.10
											km/h		
											30 FR LLV	2180	-
											30 DW LLV	1500	-
											30 FR HLV	-	2650
											40 FR HLV	-	2360
											bar	7.10	7.10
km/h													
30 FR LLV	2180	-											
30 DW LLV	1500	-											
30 FR HLV	-	2650											
40 FR HLV	-	2360											
10.0/75 - 15.3	9.00	-	264	780	345	2285	STD	18	TL	142 A6/138 A8	bar	7.10	7.10
											km/h		
											30 FR LLV	2180	-
											30 DW LLV	1500	-
											30 FR HLV	-	2650
											40 FR HLV	-	2360
											bar	2.70	3.70
km/h													
30 FR LLV	1700	-											
30 DW LLV	1180	-											
30 FR HLV	-	2060											
40 FR HLV	-	1700											

STD: Standard
IND: Industrial ②

Tolerances: O.D. ± 2% - S.W. ± 2% - RC ± 2.5%



**MAIN APPLICATION:
IMPLEMENT**



AS 504

AS 504 is an agro-industrial tire mainly designed for transport and soil tillage operations. In some sizes, AS 504 is suitable for loading and hay harvesting applications. This tire, which features excellent self-cleaning properties and increased grip, is ideal for muddy grounds. There are several versions of the AS 504 tire to meet specific end-user requirements.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)		
	Rec.	Alt.									↓		
15.3" 11.5/80 - 15.3	9.00	-	290	867	380	2540	STD	8	TL	133 A6/126 A8	bar	2.70	3.70
											km/h	2.70	3.70
											30 FR LLV	1700	-
											30 DW LLV	1180	-
											30 FR HLV	-	2060
											40 FR HLV	-	1700
											bar	3.40	4.60
km/h	3.40	4.60											
30 FR LLV	1950	-											
30 DW LLV	1360	-											
30 FR HLV	-	2300											
40 FR HLV	-	1950											
11.5/80 - 15.3	9.00	-	290	867	380	2540	STD	12	TT	141 A6/135 A8	bar	4.10	5.60
											km/h	4.10	5.60
											30 FR LLV	2180	-
											30 DW LLV	1550	-
											30 FR HLV	-	2575
											40 FR HLV	-	2180
											bar	4.10	5.60
km/h	4.10	5.60											
30 FR LLV	2180	-											
30 DW LLV	1550	-											
30 FR HLV	-	2575											
40 FR HLV	-	2180											
11.5/80 - 15.3	9.00	-	290	867	380	2540	STD	14	TT	145 A6/139 A8	bar	4.80	6.50
											km/h	4.80	6.50
											30 FR LLV	2430	-
											30 DW LLV	1700	-
											30 FR HLV	-	2900
											40 FR HLV	-	2430
											bar	4.80	6.50
km/h	4.80	6.50											
30 FR LLV	2430	-											
30 DW LLV	1700	-											
30 FR HLV	-	2900											
40 FR HLV	-	2430											
11.5/80 - 15.3	9.00	-	290	867	380	2540	STD	14	TL	145 A6/139 A8	bar	4.80	6.50
											km/h	4.80	6.50
											30 FR LLV	2430	-
											30 DW LLV	1700	-
											30 FR HLV	-	2900
											40 FR HLV	-	2430
											bar	4.80	6.50
km/h	4.80	6.50											
30 FR LLV	2430	-											
30 DW LLV	1700	-											
30 FR HLV	-	2900											
40 FR HLV	-	2430											
27 X 10 - 15.3	9.00	-	260	695	317	2071	STD	8	TT	114 A6/110 A8	bar	3.10	4.20
											km/h	3.10	4.20
											30 FR LLV	975	-
											30 DW LLV	690	-
											30 FR HLV	-	1180
											40 FR HLV	-	1060
											bar	3.10	4.20
km/h	3.10	4.20											
30 FR LLV	975	-											
30 DW LLV	690	-											
30 FR HLV	-	1180											
40 FR HLV	-	1060											

STD: Standard



MAIN APPLICATION:
IMPLEMENT



AS 504

AS 504 is an agro-industrial tire mainly designed for transport and soil tillage operations. In some sizes, AS 504 is suitable for loading and hay harvesting applications. This tire, which features excellent self-cleaning properties and increased grip, is ideal for muddy grounds. There are several versions of the AS 504 tire to meet specific end-user requirements.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)		
	Rec.	Alt.									↓		
15.3" 27 X 10 - 15.3	9.00	-	260	695	317	2071	STD	8	TL	114 A6/110 A8	bar	3.10	4.20
											km/h		
											30 FR LLV	975	-
											30 DW LLV	690	-
											30 FR HLV	-	1180
											40 FR HLV	-	1060
16" 6.00 - 16	4.00 E	4.50 E; 4½ K	164	735	343	2190	STD	6	TT	101 A6/98 A8	bar	2.80	3.80
											km/h		
											30 FR LLV	690	-
											30 DW LLV	485	-
											30 FR HLV	-	825
											40 FR HLV	-	750
7.50 - 16	5.50 F	4.50 E; 5.00 F; 4.00 E; 5 K; 6 LB; 6.00 F	209	803	372	2393	STD	6	TT	111 A6/ 107 A8	bar	2.30	3.00
											km/h		
											30 FR LLV	900	-
											30 DW LLV	630	-
											30 FR HLV	-	1090
											40 FR HLV	-	975
7.50 - 16	5.50 F	4.50 E; 5.00 F; 4.00 E; 5 K; 6 LB; 6.00 F	209	803	372	2393	STD	8	TT	119 A6/115 A8	bar	3.20	4.50
											km/h		
											30 FR LLV	1120	-
											30 DW LLV	775	-
											30 FR HLV	-	1360
											40 FR HLV	-	1215
7.50 - 16	5.50 F	4.50 E; 5.00 F; 4.00 E; 5 K; 6 LB; 6.00 F	209	803	372	2393	STD	8	TL	119 A6/115 A8	bar	3.20	4.50
											km/h		
											30 FR LLV	1120	-
											30 DW LLV	775	-
											30 FR HLV	-	1360
											40 FR HLV	-	1215
17" 15.0/55 - 17	13.00	13	380	890	395	2608	STD	10	TL	141 A6/134 A8	bar	2.60	3.60
											km/h		
											30 FR LLV	2120	-
											30 DW LLV	1500	-
											30 FR HLV	-	2575
											40 FR HLV	-	2120
15.0/55 - 17	13.00	13	380	890	395	2608	STD	14	TL	147 A6/141 A8	bar	3.60	4.90
											km/h		
											30 FR LLV	2575	-
											30 DW LLV	1850	-
											30 FR HLV	-	3075
											40 FR HLV	-	2575

STD: Standard

Tolerances: O.D. ± 2% - S.W. ± 2% - RC ± 2.5%



**MAIN APPLICATION:
IMPLEMENT**



AS 504

AS 504 is an agro-industrial tire mainly designed for transport and soil tillage operations. In some sizes, AS 504 is suitable for loading and hay harvesting applications. This tire, which features excellent self-cleaning properties and increased grip, is ideal for muddy grounds. There are several versions of the AS 504 tire to meet specific end-user requirements.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)				
	Rec.	Alt.									↓				
17"	19.0/45 - 17	16.00	-	465	865	389	2578	STD	14	TL	150 A6/146 A8	bar	2.80	3.80	
												km/h	2800	-	
	420/55 - 17	13.00	-	430	910	407	2712	STD	14	TL	-	bar	3.00		
												km/h	2650		
	420/55 - 17	13.00	-	430	910	407	2712	STD	16	TL	-	bar	3.50		
												km/h	2900		
	18"	7.50 - 18	5.50 F	4.50 E; 6.00 F; 5.00 F	209	854	407	2649	STD	6	TT	113 A6/109 A8	bar	2.30	2.90
													km/h	950	-
		7.50 - 18	5.50 F	4.50 E; 6.00 F; 5.00 F	209	854	407	2649	STD	8	TT	120 A6/ 117 A8	bar	3.10	4.30
													km/h	1180	-
10.5/80 - 18		W 9	9; W 8	274	907	405	2657	STD	10	TL	138 A6/131 A8	bar	3.70	5.10	
												km/h	1950	-	
12.5/80 - 18		W 9	9; 11	308	987	438	2892	STD	12	TL	148 A6/142 A8	bar	3.70	5.10	
												km/h	2650	-	

STD: Standard



MAIN APPLICATION:
IMPLEMENT



AS 504

AS 504 is an agro-industrial tire mainly designed for transport and soil tillage operations. In some sizes, AS 504 is suitable for loading and hay harvesting applications. This tire, which features excellent self-cleaning properties and increased grip, is ideal for muddy grounds. There are several versions of the AS 504 tire to meet specific end-user requirements.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)			
	Rec.	Alt.									↓			
18"	12.5/80 - 18	W 9	9; 11	308	987	438	2892	STD	16	TL	154 A6/150 A8	bar	4.90	6.70
												km/h		
												30 FR LLV	3150	-
												30 DW LLV	2180	-
												30 FR HLV	-	3750
												40 FR HLV	-	3350
												bar	5.50	7.20
km/h														
30 FR LLV	3350	-												
30 DW LLV	2360	-												
30 FR HLV	-	4000												
40 FR HLV	-	3350												
20"	7.50 - 20	5.50 F	4.50 E; 6.00 F; 5.00 F	209	904	422	2695	STD	8	TT	122 A6/119 A8	bar	3.20	4.20
												km/h		
												30 FR LLV	1250	-
												30 DW LLV	875	-
												30 FR HLV	-	1500
												40 FR HLV	-	1360
												bar	2.50	3.40
	km/h													
	30 FR LLV	3075	-											
	30 DW LLV	2180	-											
	30 FR HLV	-	3650											
	40 FR HLV	-	3075											
	16.0/70 - 20	13	12 SDC; 14; 13 SDC	408	1097	487	3214	STD	10	TL	153 A6/147 A8	bar	3.00	4.10
												km/h		
												30 FR LLV	3450	-
												30 DW LLV	2430	-
												30 FR HLV	-	4125
40 FR HLV												-	3450	
bar												3.50	4.80	
km/h														
30 FR LLV	3750	-												
30 DW LLV	2650	-												
30 FR HLV	-	4500												
40 FR HLV	-	3750												
16.0/70 - 20	13	12 SDC; 14; 13 SDC	408	1097	487	3214	STD	14	TL	160 A6/1564 A8	bar	3.50	4.80	
											km/h			
											30 FR LLV	3750	-	
											30 DW LLV	2650	-	
											30 FR HLV	-	4500	
											40 FR HLV	-	3750	

STD: Standard



**MAIN APPLICATION:
IMPLEMENT**



AS 504

AS 504 is an agro-industrial tire mainly designed for transport and soil tillage operations. In some sizes, AS 504 is suitable for loading and hay harvesting applications. This tire, which features excellent self-cleaning properties and increased grip, is ideal for muddy grounds. There are several versions of the AS 504 tire to meet specific end-user requirements.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)		
	Rec.	Alt.									↓		
20" 16.0/70 - 20	13	12 SDC; 14; 13 SDC	408	1097	487	3214	STD	16	TL	162 A6/156 A8	bar	4.00	5.50
											km/h	30 FR LLV	4000
											30 DW LLV	2800	-
											30 FR HLV	-	4750
											40 FR HLV	-	4000
400/70 - 20	13	12 SDC; 14; 13 SDC	408	1097	487	3214	IND	-	TL	149 A8	bar	4.00	
											km/h	40	3250
24" 15.5/80 - 24	W 12	W 13; W 14 L	384	1262	566	3655	STD	10	TL	160 A6/154 A8	bar	2.50	3.40
											km/h	30 FR LLV	3750
											30 DW LLV	2650	-
											30 FR HLV	-	4500
											40 FR HLV	-	3750
15.5/80 - 24	W 12	W 13; W 14 L	384	1262	566	3655	STD	12	TL	163 A6/157 A8	bar	3.00	4.10
											km/h	30 FR LLV	4125
											30 DW LLV	2900	-
											30 FR HLV	-	4875
											40 FR HLV	-	4125
15.5/80 - 24	W 12	W 13; W 14 L	384	1262	566	3655	STD	14	TL	166 A6/160 A8	bar	3.50	4.80
											km/h	30 FR LLV	4500
											30 DW LLV	3150	-
											30 FR HLV	-	5300
											40 FR HLV	-	4500
15.5/80 - 24	W 12	W 13; W 14 L	384	1262	566	3655	SPL	14	TL	166 A6/160 A8	bar	3.50	4.80
											km/h	30 FR LLV	4500
											30 DW LLV	3150	-
											30 FR HLV	-	5300
											40 FR HLV	-	4500
15.5/80 - 24	W 12	W 13; W 14 L	384	1262	566	3655	STD	16	TL	169 A6/163 A8	bar	4.00	5.50
											km/h	30 FR LLV	4875
											30 DW LLV	3450	-
											30 FR HLV	-	5800
											40 FR HLV	-	4875

STD: Standard
SPL: Special version ③
IND: Industrial ②



MAIN APPLICATION:
IMPLEMENT



AS 504

AS 504 is an agro-industrial tire mainly designed for transport and soil tillage operations. In some sizes, AS 504 is suitable for loading and hay harvesting applications. This tire, which features excellent self-cleaning properties and increased grip, is ideal for muddy grounds. There are several versions of the AS 504 tire to meet specific end-user requirements.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)		
	Rec.	Alt.									↓		
24" 16.5/85 - 24	W 13	W 14 L; W 15 L	415	1325	591	3837	STD	10	TL	165 A6/161 A8	bar	2.40	3.10
											km/h		
											30 FR LLV	4250	-
											30 DW LLV	3000	-
											30 FR HLV	-	5150
											40 FR HLV	-	4625
											bar	2.80	3.80
km/h													
30 FR LLV	4875	-											
30 DW LLV	3450	-											
30 FR HLV	-	5800											
40 FR HLV	-	5150											
16.5/85 - 24	W 13	W 14 L; W 15 L	415	1325	591	3837	STD	16	TT	174 A6/170 A8	bar	3.80	5.20
											km/h		
											30 FR LLV	5600	-
											30 DW LLV	3875	-
											30 FR HLV	-	6700
											40 FR HLV	-	6000
											bar	3.80	5.20
km/h													
30 FR LLV	5600	-											
30 DW LLV	3875	-											
30 FR HLV	-	6700											
40 FR HLV	-	6000											
400/80 - 24	W 13	W 12; W 14 L	394	1262	566	3655	IND	-	TL	156 A8	bar	3.80	
											km/h		
											40	4000	
400/80 - 24	W 13	W 12; W 14 L	394	1262	566	3655	IND	-	TL	162 A8	bar	5.00	
											km/h		
											40	4750	

STD: Standard
IND: Industrial ②



MAIN APPLICATION:
IMPLEMENT



AS 505

AS 505 is best suited for soil tillage operations with small tractors and implement machinery. It features excellent self-cleaning properties and increased traction on the ground, especially on muddy soil.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)		
	Rec.	Alt.									↓		
15" 6.5/80 - 15	5.0	4½ K; 5 K; 5 J	163	663	310	1976	STD	6	TL	104 A6/101 A8	bar	3.60	4.90
											km/h		
6.5/80 - 15	5.0	4½ K; 5 K; 5 J	163	663	310	1976	STD	8	TL	110 A6/ 106 A8	bar	4.80	6.50
											km/h		

STD: Standard



AS 507

AS 507 is a field-oriented tire suitable for soil tillage with implement machinery. It features excellent self-cleaning properties and increased traction on the ground. The AS 507 "special" version offers even higher cut and chip resistance to face the most difficult operating conditions.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	L.S.I. Free Rolling	L.S.I. Drive Wheel	LOAD CAPACITY (KG/TIRE)	
	Rec.	Alt.										↓	
15" 185/65 - 15	5.5	-	185	640	301	1894	STD	4	TL	73 A8	85 A8	bar	2.80
												km/h	

STD: Standard



MAIN APPLICATION:
IMPLEMENT



TR 882

TR 882 is a very versatile tire suitable for several applications and vehicles. Designed to fit implement machinery and hay harvesters/balers, its usage is not only limited to soil tillage and hay harvesting operations. BKT has developed a specific TR 882 version to use the tire in forestry applications with trailers. TR 882 is also available as "aramid-belted", "HD" and "special" versions to meet specific end user requirements.



TRACTION



HIGH LOAD CAPACITY AT STANDARD PRESSURE



AGRO-INDUSTRIAL USE ①



CUT & CHIP RESISTANCE ①



HEAVY DUTY SERVICE ①②



HIGH FLOTATION CAPABILITY ①②

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)		
	Rec.	Alt.									↓		
15.5" 400/60 - 15.5	AG 13.00	-	400	875	380	2564	STD	8	TL	138 A6/132 A8	bar	2.40	3.20
											km/h	2.40	3.20
											30 FR LLV	2120	-
											30 DW LLV	1500	-
											30 FR HLV	-	2360
											40 FR HLV	-	2000
											bar	3.60	4.90
km/h	3.60	4.90											
30 FR LLV	2900	-											
30 DW LLV	2000	-											
30 FR HLV	-	3250											
40 FR HLV	-	2725											
400/60 - 15.5	AG 13.00	-	400	875	380	2564	AB	14	TL	149 A6/143 A8	bar	3.60	4.90
											km/h	3.60	4.90
											30 FR LLV	2900	-
											30 DW LLV	2000	-
											30 FR HLV	-	3250
											40 FR HLV	-	2725
											bar	3.60	4.90
km/h	3.60	4.90											
30 FR LLV	2900	-											
30 DW LLV	2000	-											
30 FR HLV	-	3250											
40 FR HLV	-	2725											
400/60 - 15.5	AG 13.00	-	400	875	380	2564	HD	14	TL	149 A6/143 A8	bar	3.60	4.90
											km/h	3.60	4.90
											30 FR LLV	2900	-
											30 DW LLV	2000	-
											30 FR HLV	-	3250
											40 FR HLV	-	2725
											bar	3.60	4.90
km/h	3.60	4.90											
30 FR LLV	2900	-											
30 DW LLV	2000	-											
30 FR HLV	-	3250											
40 FR HLV	-	2725											
400/60 - 15.5	AG 13.00	-	400	875	380	2564	SPL	14	TL	149 A6/143 A8	bar	4.50	6.20
											km/h	4.50	6.20
											30 FR LLV	3250	-
											30 DW LLV	2300	-
											30 FR HLV	-	3875
											40 FR HLV	-	3250

STD: Standard
 AB: Aramid belted version
 HD: Heavy Duty version ①
 SPL: Special version ②



**MAIN APPLICATION:
IMPLEMENT**



TR 882

TR 882 is a very versatile tire suitable for several applications and vehicles. Designed to fit implement machinery and hay harvesters/balers, its usage is not only limited to soil tillage and hay harvesting operations. BKT has developed a specific TR 882 version to use the tire in forestry applications with trailers. TR 882 is also available as "aramid-belted", "HD" and "special" versions to meet specific end user requirements.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)	
	Rec.	Alt.									↓	
15.5" 400/60 - 15.5	AG 13.00	-	400	875	380	2564	HD	18	TL	155 A6/149 A8	bar	6.20
											km/h	4.50
											30 FR LLV	3250
											30 DW LLV	2300
											30 FR HLV	-
											40 FR HLV	3875
400/60 - 15.5	AG 13.00	-	400	875	380	2564	SPL	18	TL	155 A6/149 A8	bar	6.20
											km/h	4.50
											30 FR LLV	3250
											30 DW LLV	2300
											30 FR HLV	-
											40 FR HLV	3875

HD: Heavy Duty version ①
SPL: Special version ②



SL 441

SL 441 is a free rolling tire developed for soil tillage operations with trailers and implement machinery. SL 441 has been engineered to provide best handling to drivers.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)	
	Rec.	Alt.									↓	
14.5" 200/60 - 14.5	6.75	4.50 E; 5.50 F	210	610	278	1785	STD	10	TT	113 A6/109 A8	bar	6.90
											km/h	7.10
											30 FR HLV	1150
											40 FR HLV	1030
200/60 - 14.5	6.75	4.50 E; 5.50 F	210	610	278	1785	STD	14	TT	115 A6/111 A8	bar	6.90
											km/h	7.10
											30 FR HLV	1215
											40 FR HLV	1090
200/60 - 14.5	6.75	4.50 E; 5.50 F	210	610	278	1785	STD	14	TL	115 A6/111 A8	bar	6.90
											km/h	7.10
											30 FR HLV	1215
											40 FR HLV	1090

STD: Standard



MAIN APPLICATION:
LAWN & GARDEN



TR 360

TR 360 is suitable for implement machinery in hay harvesting and lawn and garden applications. The particular tread design along with the casing structure provides excellent stability in all field conditions and ensures a long tire life-cycle.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 15 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
8" 18 X 7 - 8	5.5	-	180	460	202	1334	STD	6	TL	-	3.10	450

STD: Standard



LG SMOOTH

LG SMOOTH is a lawn and garden tire suitable for mowers. While the tire is gentle on the ground, the enhanced design ensures increased durability and eases handling. LG SMOOTH is available in an "aramid-belted" version for users who need strengthened puncture resistance.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 15 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
10" 18 X 10.50 - 10	8.5 I - 55; I - 70; I - 90	8½ JA	254	460	207	1334	STD	2	TL	-	0.80	334
20 X 10.00 - 10	8.00 I - 55	7.00 I - 55; I - 70; I - 90	245	500	223	1450	STD	2	TL	-	0.70	335
20 X 10.00 - 10	8.00 I - 55	7.00 I - 55; I - 70; I - 90	245	500	223	1450	STD	4	TL	-	1.50	530
20 X 10.00 - 10	8.00 I - 55	7.00 I - 55; I - 70; I - 90	245	500	223	1450	STD	6	TL	-	2.20	660
20 X 10.00 - 10	8.00 I - 55	7.00 I - 55; I - 70; I - 90	245	500	223	1450	AB	6	TL	-	2.20	660

AB: Aramid belted version

Tolerances: O.D. ± 2% - S.W. ± 2% - RC ± 2.5%



MAIN APPLICATION:
LAWN & GARDEN



LG 306

LG 306 is a lawn and garden tire suitable for mowers. In some sizes, LG 306 is also fit for transport operations with airport cruise cars and small tractors in municipality/maintenance applications. The specific tread pattern makes the tire gentle on the ground, easing handling at the same time.

LG 306 is available in an "aramid-belted" version for users who need strengthened puncture resistance.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 15 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
5" 11 X 4.00 - 5	3.00 A	-	104	272	120	789	STD	4	TL	-	3.20	150
6" 13 X 5.00 - 6	3.50 A	-	127	325	144	943	STD	4	TL	-	2.80	200
13 X 5.00 - 6	3.50 A	-	127	325	144	943	STD	6	TL	-	4.20	255
15 X 6.00 - 6	4.50 A	-	152	365	159	1059	STD	4	TL	-	2.10	257
15 X 6.00 - 6	4.50 A	-	152	365	159	1059	STD	6	TL	-	3.20	335
8" 16 X 6.50 - 8	5.375 I - 55; I - 70; I - 90	-	170	408	182	1183	STD	4	TL	-	1.90	280
16 X 6.50 - 8	5.375 I - 55; I - 70; I - 90	-	170	408	182	1183	STD	6	TL	-	2.90	355
16 X 6.50 - 8	5.375 I - 55; I - 70; I - 90	-	170	408	182	1183	AB	6	TL	-	2.90	355
16 X 6.50 - 8	5.375 I - 55; I - 70; I - 90	-	170	408	182	1183	STD	8	TL	-	3.70	400
18 X 8.50 - 8	7.00 I - 55; I - 70; I - 90	-	215	450	198	1305	STD	4	TL	-	1.50	375
18 X 8.50 - 8	7.00 I - 55; I - 70; I - 90	-	215	450	198	1305	STD	6	TL	-	2.30	475
18 X 9.50 - 8	7.00 I - 55; I - 70; I - 90	-	230	470	206	1363	STD	4	TL	-	1.40	425

STD: Standard
AB: Aramid belted version



**MAIN APPLICATION:
LAWN & GARDEN**



LG 306

LG 306 is a lawn and garden tire suitable for mowers. In some sizes, LG 306 is also fit for transport operations with airport cruise cars and small tractors in municipality/maintenance applications. The specific tread pattern makes the tire gentle on the ground, easing handling at the same time. LG 306 is available in an "aramid-belted" version for users who need strengthened puncture resistance.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 15 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
8" 18 X 8.50 - 8	7.00 I - 55; I - 70; I - 90	-	215	450	198	1305	AB	6	TL	-	2.30	475
18 X 9.50 - 8	7.00 I - 55; I - 70; I - 90	-	230	470	206	1363	STD	6	TL	-	2.50	605
18 X 9.50 - 8	7.00 I - 55; I - 70; I - 90	-	230	470	206	1363	AB	6	TL	-	2.50	605
20 X 10.00 - 8	8.00 I - 55	7.00 I - 55; I - 70; I - 90	254	508	221	1473	STD	4	TL	-	1.50	545
20 X 10.00 - 8	8.00 I - 55	7.00 I - 55; I - 70; I - 90	254	508	221	1473	STD	6	TL	-	2.20	670
20 X 10.00 - 8	8.00 I - 55	7.00 I - 55; I - 70; I - 90	254	508	221	1473	AB	6	TL	-	2.20	670
10" 18 X 8.50 - 10	7.00 I - 55; I - 70; I - 90	-	210	460	209	1340	STD	4	TL	-	1.50	361
20 X 8.00 - 10	6.00 I - 55; I - 70; I - 90	6 JA	205	500	223	1450	STD	4	TL	-	1.70	412
20 X 10.00 - 10	8.00 I - 55	7.00 I - 55	250	508	226	1473	STD	4	TL	-	1.50	530
20 X 8.00 - 10	6.00 I - 55; I - 70; I - 90	6 JA	205	500	223	1450	STD	6	TL	-	2.50	510
20 X 10.00 - 10	8.00 I - 55	7.00 I - 55	250	508	226	1473	STD	6	TL	-	2.20	660
20 X 10.00 - 10	8.00 I - 55	7.00 I - 55	250	508	226	1473	AB	6	TL	-	2.20	660

STD: Standard
AB: Aramid belted version ①



**MAIN APPLICATION:
LAWN & GARDEN**



LG 306

LG 306 is a lawn and garden tire suitable for mowers. In some sizes, LG 306 is also fit for transport operations with airport cruise cars and small tractors in municipality/maintenance applications. The specific tread pattern makes the tire gentle on the ground, easing handling at the same time.

LG 306 is available in an "aramid-belted" version for users who need strengthened puncture resistance.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 15 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
12" 23 X 8.50 - 12	7.00 I - 55; I - 70; I - 90	7 JA	210	575	258	1668	STD	4	TL	-	1.50	500
23 X 8.50 - 12	7.00 I - 55; I - 70; I - 90	7 JA	210	575	258	1668	STD	6	TL	-	2.30	650
23 X 8.50 - 12	7.00 I - 55; I - 70; I - 90	7 JA	210	575	258	1668	AB	6	TL	-	2.30	650
23 X 8.50 - 12	7.00 I - 55; I - 70; I - 90	7 JA	210	575	258	1668	STD	8	TL	-	3.00	765
23 X 8.50 - 12	7.00 I - 55; I - 70; I - 90	7 JA	210	575	258	1668	STD	12	TL	-	4.50	960
23 X 10.50 - 12	8.5 I - 55	7.00 I - 55; I - 70; I - 90	260	585	262	1697	STD	4	TL	-	1.40	600
23 X 10.50 - 12	8.5 I - 55	7.00 I - 55; I - 70; I - 90	260	585	262	1697	STD	6	TL	-	2.20	800
23 X 10.50 - 12	8.5 I - 55	7.00 I - 55; I - 70; I - 90	260	585	262	1697	AB	6	TL	-	2.20	800
23 X 10.50 - 12	8.5 I - 55	7.00 I - 55; I - 70; I - 90	260	585	262	1697	STD	8	TL	-	3.00	955
23 X 10.50 - 12	8.5 I - 55	7.00 I - 55; I - 70; I - 90	260	585	262	1697	STD	12	TL	-	4.50	1215
24 X 12.00 - 12	9.5 AT	9.0 AT; 8.5 AT; 8.0 AT	298	610	276	1774	STD	4	TL	-	1.40	775
26 X 12.00 - 12	10.50 I - 55; I - 70; I - 90	10½ JA; 8½ JA	310	640	283	1856	STD	4	TL	-	1.40	800

STD: Standard
AB: Aramid belted version



**MAIN APPLICATION:
LAWN & GARDEN**



LG 306

LG 306 is a lawn and garden tire suitable for mowers. In some sizes, LG 306 is also fit for transport operations with airport cruise cars and small tractors in municipality/maintenance applications. The specific tread pattern makes the tire gentle on the ground, easing handling at the same time. LG 306 is available in an "aramid-belted" version for users who need strengthened puncture resistance.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)	
	Rec.	Alt.									↓	
12" 26 X 12.00 - 12	10.50 I - 55; I - 70; I - 90	10½ JA; 8½ JA	310	640	283	1856	AB	6	TL	-	bar	2.10
											mph	1030
											15	
26 X 12.00 - 12	10.50 I - 55; I - 70; I - 90	10½ JA; 8½ JA	310	640	283	1856	STD	8	TL	-	bar	3.00
											mph	1265
											15	
26 X 12.00 - 12	10.50 I - 55; I - 70; I - 90	10½ JA; 8½ JA	310	640	283	1856	AB	8	TL	-	bar	3.00
											mph	1265
											15	
26 X 12.00 - 12	10.50 I - 55; I - 70; I - 90	10½ JA; 8½ JA	310	640	283	1856	STD	12	TL	-	bar	4.50
											mph	1600
											15	
26 X 12.00 - 12	10.50 I - 55; I - 70; I - 90	10½ JA; 8½ JA	310	640	283	1856	STD	14	TL	-	bar	5.20
											mph	1740
											15	
14" 24 X 8.50 - 14	7 JA	-	210	610	280	1769	STD	4	TL	-	bar	1.60
											mph	550
											15	
25 X 8.50 - 14	7.00 I - 55; I - 70; I - 90	-	220	638	333	1914	STD	6	TL	-	bar	2.20
											mph	750
											15	
15" 27 X 8.50 - 15	7.00 JA	-	216	680	308	1970	STD	4	TL	-	bar	2.10
											mph	560
											50	
27 X 10.50 - 15	8.00 LB	-	272	705	318	2042	STD	4	TL	-	bar	2.10
											mph	600
											50	
27 X 10.50 - 15	8.00 LB	-	272	705	318	2042	STD	12	TL	-	bar	6.10
											mph	1100
											50	
31 X 15.5 - 15	13 LB	-	391	792	350	2313	STD	4	TL	-	bar	1.40
											mph	775
											15	

STD: Standard
AB: Aramid belted version ①



MAIN APPLICATION:
LAWN & GARDEN



LG 306

LG 306 is a lawn and garden tire suitable for mowers. In some sizes, LG 306 is also fit for transport operations with airport cruise cars and small tractors in municipality/maintenance applications. The specific tread pattern makes the tire gentle on the ground, easing handling at the same time.

LG 306 is available in an "aramid-belted" version for users who need strengthened puncture resistance.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)		
	Rec.	Alt.									↓		
16"	13.6 - 16	W 12	W 11	388	975	414	2847	STD	4	TL	-	bar	1.00
												mph	950
												15	
16.5"	33 X 15.50 - 16.5	12.00	-	396	840	374	2453	STD	10	TL	-	bar	2.10
												mph	1630
												15	
20"	38 X 14.00 - 20	W 11	W 11 H	375	980	435	2894	STD	4	TL	-	bar	1.70
												mph	1050
												50	
	44 X 18.00 - 20	W 14 L	W 14 LH	475	1180	543	3496	STD	4	TL	-	bar	1.40
mph												1500	
50													

STD: Standard



MAIN APPLICATION:
LAWN & GARDEN



LG 307

LG 307 is a lawn and garden tire suitable for mowers. The specific tread pattern makes the tire gentle on the ground to prevent turf damages, easing handling at the same time.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 15 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
8" 20 X 10.00 - 8	8.00 I - 55; I - 70; I - 90	7.00 I - 55; I - 70; I - 90	255	495	215	1435	STD	4	TL	-	1.50	545
20 X 10.00 - 8	8.00 I - 55; I - 70; I - 90	7.00 I - 55; I - 70; I - 90	255	495	215	1435	STD	6	TL	-	2.20	670
10" 20 X 12.00 - 10	8.5 I - 55; I - 70; I - 90	-	285	500	221	1435	STD	4	TL	-	1.40	600

STD: Standard



**MAIN APPLICATION:
LAWN & GARDEN**



LG 408

LG 408 is a lawn and garden tire suitable for mowers. The specific tread pattern makes the tire gentle on the ground to prevent turf damages. LG 408 is available in an "aramid-belted" version for users who need strengthened puncture resistance.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 15 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
12" 24 X 13.00 - 12	10.5 I - 55; I - 70; I - 90	-	320	605	269	1755	STD	4	TL	-	1.40	835
24 X 13.00 - 12	10.5 I - 55; I - 70; I - 90	-	320	605	269	1755	STD	6	TL	-	2.20	1085
24 X 13.00 - 12	10.5 I - 55; I - 70; I - 90	-	320	605	269	1755	AB	6	TL	-	2.20	1085
26.5 X 14.00 - 12	12.00 I	-	380	665	293	1929	STD	4	TL	-	1.30	985
26.5 X 14.00 - 12	12.00 I	-	380	665	293	1929	STD	6	TL	-	2.00	1280
26.5 X 14.00 - 12	12.00 I	-	380	665	293	1929	AB	6	TL	-	2.00	1280

STD: Standard
AB: Aramid belted version ①



**MAIN APPLICATION:
LAWN & GARDEN**



LG RIB

LG RIB is a lawn and garden tire suitable for mowers. The specific tread pattern makes the tire gentle on the ground to prevent turf damages and ensures a long product life. LG RIB is available in an "aramid-belted" version for users who need strengthened puncture resistance.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 15 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
6" 13 X 5.00 - 6	3.50 A	-	127	325	144	943	STD	4	TL	-	2.80	200
13 X 5.00 - 6	3.50 A	-	127	325	144	943	AB	6	TL	-	4.20	255
15 X 6.00 - 6	4.50 A	-	152	365	159	1059	STD	4	TL	-	2.10	257
15 X 6.00 - 6	4.50 A	-	152	365	159	1059	STD	6	TL	-	3.20	335
15 X 6.00 - 6	4.50 A	-	152	365	159	1059	AB	6	TL	-	3.20	335
8" 16 X 6.50 - 8	5.375 I - 55; I - 70; I - 90	-	170	408	182	1183	STD	4	TT	-	1.90	280
16 X 6.50 - 8	5.375 I - 55; I - 70; I - 90	-	170	408	182	1183	STD	4	TL	-	1.90	280
16 X 6.50 - 8	5.375 I - 55; I - 70; I - 90	-	170	408	182	1183	STD	6	TL	-	2.90	355
16 X 6.50 - 8	5.375 I - 55; I - 70; I - 90	-	170	408	182	1183	AB	6	TL	-	2.90	355
16 X 6.50 - 8	5.375 I - 55; I - 70; I - 90	-	170	408	182	1183	STD	8	TL	-	3.90	420
16 X 6.50 - 8	5.375 I - 55; I - 70; I - 90	-	170	408	182	1183	STD	10	TL	-	4.90	480
10" 20 X 10.00 - 10	8.00 I - 55; I - 70; I - 90	7.00 I - 55; I - 70; I - 90	236	498	222	1444	STD	4	TL	-	1.50	530

STD: Standard
AB: Aramid belted version ①



MAIN APPLICATION:
LAWN & GARDEN



TRAC MASTER

TRAC MASTER is a soil tillage and lawn and garden tire, suitable for small tractors, implement machinery, compact loaders, and mowers. It has been designed to improve traction, while the wider footprint ensures great stability.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 50 KM/H	
	Rec.	Alt.									bar	max load (kg)
12" 300/60 - 12	10.5	9.5	306	645	285	1885	STD	8	TL	-	3.20	1030
15" 31 X 15.50 - 15	13 LB	-	405	810	357	2365	STD	6	TL	-	2.10	975
31 X 15.50 - 15	13 LB	-	405	810	357	2365	STD	8	TL	-	3.10	1250
33 X 15.50 - 15	13 LB	-	404	865	378	2526	STD	6	TL	-	2.10	1370
33 X 15.50 - 15	13 LB	-	404	865	378	2526	STD	8	TL	-	3.10	1620

STD: Standard



TR 313

TR 313 is suitable for soil tillage and lawn and garden operations with implement machinery, trenchers and orchard harvesters. It is an ideal tire for muddy grounds. The large contact area provides an excellent grip. The TR 313 tire has been engineered to ensure a high level of stability also in critical operating conditions.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 50 KM/H	
	Rec.	Alt.									bar	max load (kg)
15" 31 X 15.50 - 15	13 LB	-	370	770	342	2233	STD	8	TL	-	3.10	1250

STD: Standard



MAIN APPLICATION:
LAWN & GARDEN



TR 315

TR 315 is suitable for muddy grounds in soil tillage and lawn and garden operations. It is ideal with implement machinery, trenchers and orchard harvesters. The TR 315 tire has a large contact area which provides excellent grip and outstanding stability in any condition.



TRACTION



SUITABLE FOR
MUDDY GROUND



STABILITY



SPECIAL
COMPOUND ^①

SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)	
	Rec.	Alt.									↓	
8" 16 X 6.50 - 8	5.375 I - 55; I - 70; I - 90	-	155	408	182	1183	STD	4	TL	-	bar	1.90
											km/h	280
											15	280
16 X 6.50 - 8	5.375 I - 55; I - 70; I - 90	-	155	408	182	1183	STD	6	TL	-	bar	2.90
											km/h	355
											15	355
12" 23 X 8.50 - 12	7 JA; 7.00 I - 55; I - 70; I - 90	-	205	575	258	1668	STD	4	TL	-	bar	1.50
											km/h	500
											15	500
23 X 8.50 - 12	7 JA; 7.00 I - 55; I - 70; I - 90	-	205	575	258	1668	STD	6	TL	-	bar	2.30
											km/h	650
											15	650
23 X 10.50 - 12	8½ JA	7 JA	255	590	260	1682	STD	4	TL	-	bar	1.40
											km/h	600
											15	600
23 X 10.50 - 12	8½ JA	7 JA	255	590	260	1682	STD	6	TL	-	bar	2.20
											km/h	800
											15	800
23 X 10.50 - 12	8½ JA	7 JA	255	590	260	1682	STD	8	TL	-	bar	3.00
											km/h	960
											15	960
23 X 10.50 - 12	8½ JA	7 JA	255	590	260	1682	STD	10	TL	-	bar	3.80
											km/h	1100
											15	1100
26 X 12.00 - 12	10½ JA	8½ JA; 9½ JA	308	655	289	1905	STD	4	TL	-	bar	1.40
											km/h	800
											15	800
26 X 12.00 - 12	10½ JA	8½ JA; 9½ JA	308	655	289	1905	STD	8	TL	-	bar	3.00
											km/h	1265
											15	1265
26 X 12.00 - 12	10½ JA	8½ JA; 9½ JA	308	655	289	1905	STD	10	TL	-	bar	3.80
											km/h	1450
											15	1450
26 X 12.00 - 12	10½ JA	8½ JA; 9½ JA	308	655	289	1905	SPL	10	TL	-	bar	3.80
											km/h	1450
											15	1450
26 X 12.00 - 12	10½ JA	8½ JA; 9½ JA	308	655	289	1905	STD	12	TL	-	bar	4.50
											km/h	1600
											15	1600
15" 31 X 15.50 - 15	13 LB	-	390	800	354	2320	STD	8	TL	-	bar	3.10
											km/h	1250
											50	1250

STD: Standard

SPL: Special version ^①

Tolerances: O.D. ± 2% - S.W. ± 2% - RC ± 2.5%



MAIN APPLICATION:
LAWN & GARDEN



TR 317

TR 317 is suitable for soil tillage operations on muddy grounds with implement machinery and trenchers. The TR 317 tire has a large contact area which provides excellent grip and outstanding stability in any condition.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 15 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
8" 18 X 8.50 - 8	7.00 I - 55; I - 70; I - 90	-	215	450	198	1305	STD	4	TL	-	1.50	375

STD: Standard



TR 319

TR 319 is a tire for implement machinery, orchard harvesters and trenchers in lawn and garden as well as soil tillage applications. Featuring a large contact area providing best traction, TR 319 is very suitable for applications on wet and dry surfaces.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 15 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
12" 26 X 12.00 - 12	10.50 AT	8.0 AT; 8.5 AT; 9.0 AT	318	640	-	-	STD	8	TL	116 A3	3.00	1250

STD: Standard



MAIN APPLICATION:
GOLF



GF 304

GF 304 is suitable for soil tillage applications with implement machinery and trenchers. No matter which soil tillage operation you are performing on your field, GF 304 will ensure best comfort and ground protection. GF 304 is also available as "aramid-belted" version to provide increased puncture resistance.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 15 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
8" 18 X 8.50 - 8	7.00 I - 55; I - 70; I - 90	-	216	460	202	1334	STD	4	TL	-	1.50	375
18 X 8.50 - 8	7.00 I - 55; I - 70; I - 90	-	216	460	202	1334	AB	4	TL	-	1.50	375
18 X 8.50 - 8	7.00 I - 55; I - 70; I - 90	-	216	460	202	1334	STD	6	TL	-	2.30	475

STD: Standard
AB: Aramid belted version



GF 305 CLASSIC

GF 305 CLASSIC is a special tire mainly designed for golf carts, but it is also suitable for some hay harvesting operations with implement machinery. This tire is naturally gentle on the ground and protects the field from damages. GF 305 CLASSIC is a really comfortable tire which makes riding a pleasure.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 15 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
10" 205/50 - 10	7.00 I - 55	6.00 I - 55; I - 70; I - 90	215	470	211	1363	STD	4	TL	-	2.20	302

STD: Standard



MAIN APPLICATION:
TRAILER



GF 305 FARM TRAILER

GF 305 FARM TRAILER has been designed for trailers in transport operations. This tire is particularly suitable for heavy-duty service and provides outstanding stability in any condition.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 40 KM/H	
	Rec.	Alt.									bar	max load (kg)
10" 205/65 - 10 (20.5 x 8.00 - 10)	6.00	-	212	520	223	1508	STD	10	TL	-	6.20	695

STD: Standard



INDUSTRIAL RIB F3 (F-3)

INDUSTRIAL RIB F3 is an agro-industrial rib-pattern tire designed for field and road transport as well as for soil tillage operations with implement machinery and trailers. This tire features outstanding cut and chip resistance making it suitable for the most critical operating conditions and ensuring a long tire life-cycle.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)	
	Rec.	Alt.									bar	km/h
15" 11L - 15 SL	8 LB	10 LB	279	813	-	-	STD	10	TL	-	bar	3.60
											30 km/h	1185
											40 km/h	1060
11L - 15 SL	8 LB	10 LB	279	813	-	-	STD	12	TL	-	bar	4.20
											30 km/h	1290
											40 km/h	1160
16" 11L - 16 SL	W 8 L	8 LB; 10 LB; W 10 L	279	830	-	-	SPL	10	TL	-	bar	3.60
											30 km/h	1250
											40 km/h	1120
11L - 16 SL	W 8 L	8 LB; 10 LB; W 10 L	279	830	-	-	STD	12	TL	-	bar	4.40
											30 km/h	1385
											40 km/h	1250

STD: Standard
SPL: Special version



**MAIN APPLICATION:
TRAILER**



I-1 (I-1)

I-1 has been designed for field and road transport as well as for soil tillage operations with implement machinery and trailers. I-1 is a high-speed tire that optimizes travel times so that you can focus on your core business. Thanks to its flotation capability, the I-1 tire reduces soil compaction in the field and avoids damages to your valuable crops.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)		
	Rec.	Alt.									bar	km/h	
14"	9.5L - 14 SL	7.00	8 KB	240	735	326	2154	STD	8	TT	-	bar	3.00
												km/h	65
												bar	1090
9.5L - 14 SL	7.00	8 KB	240	735	326	2154	STD	8	TL	-	bar	3.00	
											km/h	65	
											bar	1090	
11L - 14 SL	8.00	8 KB	256	753	333	2206	STD	8	TL	-	bar	2.50	
											km/h	65	
											bar	1120	
15"	6.70 - 15 SL	4½ KB	5 KB	172	710	319	2080	STD	6	TT	-	bar	3.00
												km/h	65
												bar	730
6.70 - 15 SL	4½ KB	5 KB	172	710	319	2080	STD	8	TT	-	bar	3.90	
											km/h	65	
											bar	850	
7.60 - 15 SL	5.50	6 LB	193	734	328	2151	STD	6	TT	-	bar	2.80	
											km/h	65	
											bar	800	
7.60 - 15 SL	5.50	6 LB	193	734	328	2151	STD	8	TT	-	bar	3.60	
											km/h	65	
											bar	950	
7.60 - 15 SL	5.50	6 LB	193	734	328	2151	STD	10	TT	-	bar	4.30	
											km/h	65	
											bar	1050	
9.5L - 15 SL	7.00	8 LB	241	765	340	2242	STD	6	TT	-	bar	2.20	
											km/h	65	
											bar	925	
9.5L - 15 SL	7.00	8 LB	241	765	340	2242	STD	8	TT	-	bar	3.00	
											km/h	65	
											bar	1120	
9.5L - 15 SL	7.00	8 LB	241	765	340	2242	STD	8	TL	-	bar	3.00	
											km/h	65	
											bar	1120	
9.5L - 15SL	7.00	8 LB	241	765	340	2242	SR	8	TL	-	bar	3.00	
											km/h	65	
											bar	1120	
9.5L - 15 SL	7.00	8 LB	241	765	340	2242	STD	12	TL	-	bar	4.40	
											km/h	65	
											bar	1450	
9.5L - 15SL	7.00	8 LB	241	765	340	2242	SR	12	TL	-	bar	4.40	
											km/h	65	
											bar	1450	

STD: Standard
SR: Stubble resistant

Tolerances: O.D. ± 2% - S.W. ± 2% - RC ± 2.5%



MAIN APPLICATION: TRAILER



I-1 (I-1)

I-1 has been designed for field and road transport as well as for soil tillage operations with implement machinery and trailers. I-1 is a high-speed tire that optimizes travel times so that you can focus on your core business. Thanks to its flotation capability, the I-1 tire reduces soil compaction in the field and avoids damages to your valuable crops.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)	
	Rec.	Alt.									bar	km/h
15" 11L - 15 SL	8 LB	10 LB	270	770	342	2256	STD	8	TT	-	bar	2.50
											65	1150
11L - 15 SL	8 LB	10 LB	270	770	342	2256	STD	8	TL	-	bar	2.50
											65	1150
11L - 15SL	8 LB	10 LB	270	770	342	2256	SR	8	TL	-	bar	2.50
											65	1150
11L - 15 SL	8 LB	10 LB	270	770	342	2256	STD	10	TT	-	bar	3.00
											65	1320
11L - 15 SL	8 LB	10 LB	270	770	342	2256	STD	10	TL	-	bar	3.00
											65	1320
11L - 15 SL	8 LB	10 LB	270	770	342	2256	STD	12	TL	-	bar	3.60
											65	1450
11L - 15SL	8 LB	10 LB	270	770	342	2256	SR	12	TL	-	bar	3.60
											65	1450
12.5L - 15 SL	10 LB	-	310	820	362	2403	STD	8	TT	-	bar	2.50
											65	1360
12.5L - 15 SL	10 LB	-	310	820	362	2403	STD	8	TL	-	bar	2.50
											65	1360
12.5L - 15 SL	10 LB	-	310	820	362	2403	STD	10	TT	-	bar	3.00
											65	1550
12.5L - 15 SL	10 LB	-	310	820	362	2403	STD	10	TL	-	bar	3.00
											65	1550
12.5L - 15 SL	10 LB	-	310	820	362	2403	STD	12	TT	-	bar	3.60
											65	1750
12.5L - 15 SL	10 LB	-	310	820	362	2403	STD	12	TL	-	bar	3.60
											65	1750
12.5L - 15SL	10 LB	-	310	820	362	2403	SR	12	TL	-	bar	3.60
											65	1750

STD: Standard
SR: Stubble resistant
SPL: Special version



**MAIN APPLICATION:
TRAILER**



I-1 (I-1)

I-1 has been designed for field and road transport as well as for soil tillage operations with implement machinery and trailers. I-1 is a high-speed tire that optimizes travel times so that you can focus on your core business. Thanks to its flotation capability, the I-1 tire reduces soil compaction in the field and avoids damages to your valuable crops.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)	
	Rec.	Alt.									bar	km/h
16" 7.50 - 16 SL	5.50 F	6 LB	205	785	350	2300	STD	8	TT	-	bar	3.30
											km/h	1060
											65	1060
7.50 - 16 SL	5.50 F	6 LB	205	785	350	2300	SPL	8	TT	-	bar	3.30
											km/h	1060
											65	1060
7.50 - 16 SL	5.50 F	6 LB	205	785	350	2300	SPL	10	TT	-	bar	4.10
											km/h	1215
											65	1215
9.00 - 16 SL	6 LB	8 LB; W 8 L	234	845	374	2476	STD	10	TT	-	bar	3.60
											km/h	1500
											65	1500
11L - 16 SL	8 LB	10 LB; W 8 L	270	795	355	2329	STD	8	TT	-	bar	2.50
											km/h	1215
											65	1215
11L - 16 SL	8 LB	10 LB; W 8 L	270	795	355	2329	STD	10	TT	-	bar	3.00
											km/h	1360
											65	1360
11L - 16 SL	8 LB	10 LB; W 8 L	270	795	355	2329	STD	12	TT	-	bar	3.50
											km/h	1490
											65	1490
12.5L - 16 SL	10 LB	W 10 L	310	845	374	2476	STD	8	TT	-	bar	2.50
											km/h	1400
											65	1400
12.5L - 16 SL	10 LB	W 10 L	310	845	374	2476	STD	10	TT	-	bar	3.00
											km/h	1600
											65	1600
12.5L - 16 SL	10 LB	W 10 L	310	845	374	2476	STD	12	TT	-	bar	3.60
											km/h	1800
											65	1800
12.5L - 16 SL	10 LB	W 10 L	310	845	374	2476	STD	12	TL	-	bar	3.60
											km/h	1800
											65	1800
16.1" 14L - 16.1 SL	W 11 C	-	360	935	409	2740	STD	8	TL	-	bar	2.20
											km/h	1750
											65	1750
14L - 16.1 SL	W 11 C	-	360	935	409	2740	STD	12	TL	-	bar	3.00
											km/h	2120
											65	2120
16.5L - 16.1 SL	W 14 C	W 14 CH	17.1	40.4	17.5	118.2	STD	10	TL	-	bar	2.50
											km/h	2360
											50	2360

STD: Standard
SPL: Special version

Tolerances: O.D. ± 2% - S.W. ± 2% - RC ± 2.5%



MAIN APPLICATION: TRAILER



I-1 (I-1)

I-1 has been designed for field and road transport as well as for soil tillage operations with implement machinery and trailers. I-1 is a high-speed tire that optimizes travel times so that you can focus on your core business. Thanks to its flotation capability, the I-1 tire reduces soil compaction in the field and avoids damages to your valuable crops.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)		
	Rec.	Alt.									bar	km/h	
16.1"	19L - 16.1 SL	W 16 C	W 16 CH	490	1100	474	3223	STD	10	TL	-	bar	2.20
												km/h	2725
												50	2725
16.1"	19L - 16.1 SL	W 16 C	W 16 CH	490	1100	474	3223	STD	12	TL	-	bar	2.50
												km/h	3000
												50	3000
16.1"	19L - 16.1 SL	W 16 C	W 16 CH	490	1100	474	3223	STD	14	TL	-	bar	2.80
												km/h	3200
												50	3200
16.1"	21.5L - 16.1 SL	W 18 CH	W 16 CH	550	1130	485	3311	STD	8	TL	-	bar	1.70
												km/h	2725
												50	2725
16.1"	21.5L - 16.1 SL	W 18 CH	W 16 CH	550	1130	485	3311	STD	14	TL	-	bar	2.50
												km/h	3550
												50	3550
24"	9.00 - 24 SL	W 8 H	-	272	1094	-	-	STD	8	TL	-	bar	2.80
												km/h	1600
												50	1600
24"	11.25 - 24 SL	W 10 H	W 10; W 8	325	1171	-	-	STD	8	TL	-	bar	2.20
												km/h	1850
												50	1850

STD: Standard



MAIN APPLICATION:
TRAILER



FARM HIGHWAY SPECIAL

FARM HIGHWAY SPECIAL is a high-speed tire designed for transport applications with trailers. It provides high load capacity to improve your productivity and ensures a long tire life-cycle.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	LR	TYPE	LI/SS	LOAD CAPACITY 100 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
15" 9.5L - 15 FI	7.00	8 LB	245	766	343	2183	STD	D	TL	-	4.10	1215
9.5L - 15 FI	7.00	8 LB	245	766	343	2183	STD	F	TL	-	6.20	1550
10.00 - 15 FI	8 LB	-	274	853	-	-	STD	D	TL	-	4.10	1800
11L - 15 FI	8 LB	10 LB; 8 J	279	777	347	2214	STD	D	TL	-	4.10	1400
11L - 15 FI	8 LB	10 LB; 8 J	279	777	347	2214	STD	F	TL	-	6.20	1800
12.5L - 15 FI	10 LB	-	317	815	362	2323	STD	F	TL	-	6.20	2120

STD: Standard



**MAIN APPLICATION:
TRAILER**



BK 823

BK 823 is a field-oriented tire mainly designed for 2WD tractors, implement machinery and trailers in transport and soil tillage applications. Its special block pattern makes the tire particularly suitable for heavy-duty service.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 40 KM/H	
	Rec.	Alt.									bar	max load (kg)
16" 9.00 - 16	6.5	-	245	891	394	2583	STD	12	TT	124 x8	3.80	1600
9.00 - 16	6.5	-	245	891	394	2583	STD	14	TT	127 A8	4.40	1750

STD: Standard



SL 441

SL 441 is a free rolling tire developed for soil tillage operations with trailers and implement machinery. SL 441 has been engineered to provide best handling to drivers.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)	
	Rec.	Alt.									bar	kg
14.5" 200/60 - 14.5	6.75	4.50 E; 5.50 F	210	610	278	1785	STD	10	TT	113 A6/109 A8	6.90	1150
200/60 - 14.5	6.75	4.50 E; 5.50 F	210	610	278	1785	STD	14	TT	115 A6/111 A8	7.10	1215
											1090	
200/60 - 14.5	6.75	4.50 E; 5.50 F	210	610	278	1785	STD	14	TL	115 A6/111 A8	7.10	1215
											1090	

STD: Standard



MAIN APPLICATION:
TRAILER



ST 180

ST 180 is a road-oriented tire developed for soil tillage and transport applications with trailers and implement machinery. Its specific tread pattern ensures a long tire life-cycle due to reduced wear and contributes to significant fuel savings.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 100 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
8"												
4.80 - 8	3.75 - 1 - 55	3.75 - 1 - 70	121	418	-	-	STD	6	TL	-	6.20	345
5.70 - 8	4.50 - 1 - 55	1 - 70; 1 - 90; 3.75	142	475	-	-	STD	6	TL	-	5.20	412
5.70 - 8	4.50 - 1 - 55	1 - 70; 1 - 90; 3.75	142	475	-	-	STD	8	TL	-	6.90	487
9"												
6.00 - 9	4.00 - 1 - 55	4.50 - 1 - 55; 1 - 70; 1 - 90	165	540	-	-	STD	8	TT	-	5.90	630
6.00 - 9	4.00 - 1 - 55	4.50 - 1 - 55; 1 - 70; 1 - 90	165	540	-	-	STD	8	TL	-	5.90	630
6.00 - 9	4.00 - 1 - 55	4.50 - 1 - 55; 1 - 70; 1 - 90	165	540	-	-	STD	10	TL	-	6.90	690
6.00 - 9	4.00 - 1 - 55	4.50 - 1 - 55; 1 - 70; 1 - 90	165	540	-	-	STD	12	TT	-	7.90	830
6.00 - 9	4.00 - 1 - 55	4.50 - 1 - 55; 1 - 70; 1 - 90	165	540	-	-	STD	12	TL	-	7.90	830
10"												
5.00 - 10	3.5	-	142	530	-	-	STD	6	TL	-	3.00	390

STD: Standard



MAIN APPLICATION:
TRAILER



TR 387 (R-3)

TR 387 is an agro-industrial tire suitable for soil compactors. It features outstanding flotation capability and is available in different versions to meet specific user requirements in terms of cut and chip resistance, heavy-duty services and durability. The "dual bead" version is particularly suitable for industrial tractors and transport operations on trailers.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 30 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
26" 18.4 - 26	DW 16 L	DW 15 L	475	1430	635	4150	STD	10	TL	142 A6	1.80	2650
18.4 - 26	DW 16 L	DW 15 L	475	1430	635	4150	STD	12	TL	146 A6	2.30	3000
18.4 - 26	DW 16 L	DW 15 L	475	1430	635	4150	HD	16	TL	152 A6	2.90	3550
23.1 - 26	DW 20 B	-	587	1560	690	4545	STD	8	TL	145 A6	1.10	2900
23.1 - 26	DW 20 B	-	587	1560	690	4545	STD	12	TL	153 A6	1.70	3650
23.1 - 26	DW 20 B	-	587	1560	690	4545	HD	12	TL	164 A6	1.70	5000
23.1 - 26	DW 20 B	-	587	1560	690	4545	STD	16	TL	159 A6	2.30	4375
23.1 - 26	DW 20 B	-	587	1560	690	4545	DB	16	TL	159 A6	2.30	4375
23.1 - 26	DW 20 B	-	587	1560	690	4545	DB HD	18	TT	161 A6	2.60	4625
23.1 - 26	DW 20 B	-	587	1560	690	4545	DB HD	18	TL	161 A6	2.60	4625
23.1 - 26	DW 20 B	-	587	1560	690	4545	HD DB SPL	18	TL	161 A6	2.60	4625

STD: Standard
 HD: Heavy Duty version ②
 DB: Dual bead version ①
 DB HD: Dual bead HD version
 HD DB SPL: Heavy Duty Dual bead special version ③



MAIN APPLICATION:
TRAILER



TR 387 (R-3)

TR 387 is an agro-industrial tire suitable for soil compactors. It features outstanding flotation capability and is available in different versions to meet specific user requirements in terms of cut and chip resistance, heavy-duty services and durability. The "dual bead" version is particularly suitable for industrial tractors and transport operations on trailers.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 30 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
28" 12.4 - 28	W 11	W 9; W 10	325	1200	550	3576	STD	8	TL	123 A6	2.30	1550
16.9 - 28	DW 15 L	DW 14 L	440	1400	630	4074	STD	8	TL	135 A6	1.70	2180
30" 16.9 - 30 (14 - 30)	DW 15 L	DW 14 L	440	1450	655	4220	STD	8	TL	137 A6	1.70	2300
18.4 - 30 (15 - 30)	DW 16 L	DW 15 L	475	1530	680	4395	STD	8	TL	139 A6	1.40	2430
18.4 - 30 (15 - 30)	DW 16 L	DW 15 L	475	1530	680	4395	HD	14	TT	151 A6	2.60	3450

STD: Standard
HD: Heavy Duty version ②



MAIN APPLICATION:
TRAILER



TR 390 (R-3)

TR 390 is an agro-industrial tire suitable for soil compactors. TR 390 features outstanding flotation capability and increased durability. Its "dual bead HD" version is particularly suitable for industrial tractors and transport operations on trailers, whereas its "dual bead HD special" version is ideal for heavy-duty service.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 30 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
26" 23.1 - 26	DW 20 B	-	587	1560	690	4545	STD	8	TL	145 A6	1.10	2900
23.1 - 26	DW 20 B	-	587	1560	690	4545	STD	12	TL	153 A6	1.70	3650
23.1 - 26	DW 20 B	-	587	1560	690	4545	STD	16	TL	159 A6	2.30	4375
23.1 - 26	DW 20 B	-	587	1560	690	4545	DB HD	18	TL	161 A6	2.60	4625
23.1 - 26	DW 20 B	-	587	1560	690	4545	HD DB SPL	18	TL	161 A6	2.60	4625
28L - 26	DW 25 B	DW 23 B	714	1560	690	4545	STD	12	TL	154 A6	1.40	3750
28L - 26	DW 25 B	DW 23 B	714	1560	690	4545	STD	16	TL	160 A6	1.90	4500

STD: Standard
DB HD: Dual bead Heavy Duty version ①
HD DB SPL: Heavy Duty Dual bead special version





MAIN APPLICATION:
TRAILER



TR 391 (R-3)

TR 391 is an agro-industrial tire suitable for transport and compacting operations with trailers and compactors. TR 391 features outstanding flotation capability to avoid soil damages.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 30 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
24" 14.9 - 24	DW 13	DW 11; DW 13 L; DW 12	405	1255	563	3639	STD	6	TL	123 A6	1.40	1550
14.9 - 24	DW 13	DW 11; DW 12; DW 13 L	405	1255	563	3639	STD	8	TL	128 A6	1.80	1800

STD: Standard



MAIN APPLICATION:
TRANSPORT



MH TR 182

MH TR 182 is suitable for transport operations with mobile home vehicles. It is a road-oriented, high-speed tire that significantly reduces fuel consumption. MH TR 182 ensures long durability and high performance along the entire product life-cycle.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 100 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
14.5" 8 - 14.5	6.00 MH	-	207	710	-	-	STD	8	TL	-	4.80	1030
8 - 14.5	6.00 MH	-	207	710	-	-	STD	10	TL	-	5.90	1180
8 - 14.5	6.00 MH	-	207	710	-	-	STD	12	TL	-	6.90	1285
8 - 14.5	6.00 MH	-	207	710	-	-	STD	14	TL	-	7.60	1390

STD: Standard



MAIN APPLICATION:
TRAILER



LT TR 182

LT TR 182 is suitable for transport operations on light trucks. This high-speed tire is road oriented and significantly reduces fuel consumption. The LT TR 182 tire is also easy to mount.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)	
	Rec.	Alt.									↓	
14.5" 8 - 14.5	6.00 MH	-	207	710	-	-	STD	12	TL	-	bar	6.90
											km/h	
											100 LS	
											100 LD	
8 - 14.5	6.00 MH	-	207	710	-	-	STD	14	TL	-	bar	7.90
											km/h	
											100 LS	
											100 LD	

STD: Standard



ST 195

ST 195 is a road-oriented tire for transport operations with mobile home vehicles. It provides significant fuel savings as well as an extended tire life-cycle. ST 195 allows carrying high loads at low pressure.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 100 KM/H	
	Rec.	Alt.									bar	max load (kg)
9" 6.00 - 9	4.00	-	165	540	-	-	STD	12	TT	-	6.90	2750
6.00 - 9											6.90	
6.00 - 9	4.00	-	165	540	-	-	STD	14	TL	-	6.90	2750
6.00 - 9											6.90	

STD: Standard



MAIN APPLICATION:
ATV



W 207

W 207 is BKT's all-terrain tire suitable for ATVs. Its design provides the best traction in any condition while the "E" marking allows the use on public roads. This tire features an excellent puncture resistance over challenging terrains.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)	
	Rec.	Alt.									bar	km/h
8" AT 22 X 11 - 8	9.0 AT	8.5 AT	272	561	-	-	STD	6	TL	-	bar	0.45
											km/h	180
											100	180
9" AT 22 X 11 - 9	9.0 AT	8.5 AT	272	561	-	-	STD	6	TL	-	bar	0.45
											km/h	180
											100	180
AT 25 X 12 - 9	9.5 AT	9.0 AT; 10.0 AT	300	632	-	-	STD	6	TL	-	bar	0.45
											km/h	224
											80	224
AT 25 X 13 - 9	10.5 AT	10.0 AT	330	635	-	-	STD	6	TL	-	bar	0.45
											km/h	243
											80	243
10" AT 22 X 7 - 10	5.5 AT	6.0 AT	178	559	-	-	STD	6	TL	-	bar	0.45
											km/h	115
											100	115
AT 22 X 8 - 10	6.5 AT	6.0 AT	203	559	-	-	STD	6	TL	-	bar	0.45
											km/h	125
											100	125
AT 22 X 11 - 10	9.0 AT	8.5 AT	272	561	-	-	STD	6	TL	-	bar	0.45
											km/h	175
											100	175
AT 23 X 10 - 10	8.0 AT	7.5 AT; 8.5 AT	249	587	-	-	STD	6	TL	-	bar	0.45
											km/h	170
											80	170
AT 23 X 7 - 10	5.5 AT	6.0 AT	177	584	-	-	STD	6	TL	-	bar	0.45
											km/h	125
											100	125
AT 23 X 8 - 10	6.5 AT	6.0 AT	203	589	-	-	STD	6	TL	-	bar	0.45
											km/h	136
											80	136
AT 24 X 11 - 10	9.0 AT	8.5 AT	279	610	-	-	STD	6	TL	-	bar	0.45
											km/h	200
											100	200
AT 25 X 11 - 10	9.0 AT	8.5 AT	285	640	-	-	STD	6	TL	-	bar	0.45
											km/h	206
											80	206
AT 25 X 12 - 10	9.5 AT	9.0 AT; 10.0 AT	297	640	-	-	STD	6	TL	-	bar	0.45
											km/h	224
											80	224

STD: Standard



MAIN APPLICATION:
ATV



W 207

W 207 is BKT's all-terrain tire suitable for ATVs. Its design provides the best traction in any condition while the "E" marking allows the use on public roads. This tire features an excellent puncture resistance over challenging terrains.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)		
	Rec.	Alt.									bar	kg	
11" AT 23 X 8 - 11	6.5 AT	6.0 AT	203	584	-	-	STD	6	TL	-	bar	0.45	
											km/h	132	
	80	bar	0.45										
		80	145										
	AT 24 X 8 - 11	6.5 AT	6.0 AT	203	612	-	-	STD	6	TL	-	bar	0.45
												km/h	145
AT 24 X 9 - 11	7.0 AT	7.5 AT	226	610	-	-	STD	6	TL	-	bar	0.45	
											km/h	165	
AT 24 X 10 - 11	8.0 AT	7.5 AT; 8.5 AT	249	612	-	-	STD	6	TL	-	bar	0.45	
											km/h	180	
AT 25 X 8 - 11	6.5 AT	6.0 AT	203	638	-	-	STD	6	TL	-	bar	0.45	
											km/h	161	
AT 25 X 10 - 11	8.0 AT	7.5 AT; 8.5 AT	249	638	-	-	STD	6	TL	-	bar	0.45	
											km/h	190	
12" AT 24 X 8 - 12	6.5 AT	6.0 AT	198	615	-	-	STD	6	TL	-	bar	0.45	
											km/h	140	
	AT 25 X 8 - 12	6.5 AT	6.0 AT	198	638	-	-	STD	6	TL	-	bar	0.45
												km/h	155
	AT 25 X 8 - 12	6.5 AT	6.0 AT	198	638	-	-	SPL	6	TL	-	bar	0.45
												km/h	155
AT 25 X 10 - 12	8.0 AT	6.5 AT; 7.5 AT; 8.5 AT	249	638	-	-	STD	6	TL	-	bar	0.45	
											km/h	190	
AT 25 X 11 - 12	9.0 AT	8.5 AT	284	638	-	-	STD	6	TL	-	bar	0.45	
											km/h	206	
AT 26 X 8 - 12	6.50 AT	6.00 AT	204	660	-	-	STD	6	TL	-	bar	0.45	
											km/h	175	
AT 26 X 10 - 12	8.0 AT	7.5 AT; 8.5 AT	241	658	-	-	STD	6	TL	-	bar	0.45	
											km/h	200	
AT 26 X 12 - 12	9.5 AT	8.0 AT; 8.5 AT; 9.0 AT	299	658	-	-	STD	6	TL	-	bar	0.45	
											km/h	236	

STD: Standard
SPL: Special version

Tolerances: O.D. ± 2% - S.W. ± 2% - RC ± 2.5%



MAIN APPLICATION:
ATV



W 207

W 207 is BKT's all-terrain tire suitable for ATVs. Its design provides the best traction in any condition while the "E" marking allows the use on public roads. This tire features an excellent puncture resistance over challenging terrains.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)	
	Rec.	Alt.									↓	
12" AT 27 X 10 - 12	8.0 AT	7.5 AT; 8.5 AT	241	683	-	-	STD	6	TL	-	bar	0.45
											km/h	222
											100	222
AT 27 X 12 - 12	9.5 AT	8.5 AT; 9.0 AT	299	683	-	-	STD	6	TL	-	bar	0.45
											km/h	250
											100	250
AT 28 X 10 - 12	8.0 AT	7.5 AT; 8.5 AT	241	706	-	-	STD	6	TL	-	bar	0.45
											km/h	231
											100	231
AT 28 X 12 - 12	9.5 AT	8.5 AT; 9.0 AT	299	706	-	-	STD	6	TL	-	bar	0.45
											km/h	258
											100	258

STD: Standard



AT 112

AT 112 is an all-terrain tire for ATVs. It is particularly suitable for loose surfaces.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 80 KM/H	
	Rec.	Alt.									bar	max load (kg)
8" AT 20 X 10 - 8	8.0 AT	7.5 AT; 8.5 AT	240	510	-	-	STD	4	TL	-	1.50	541
10" AT 20 X 10 - 10	8.0 AT	7.5 AT; 8.5 AT	240	510	-	-	STD	4	TL	-	1.50	527
12" AT 23 X 10 - 12	8.0 AT	7.5 AT; 8.5 AT	240	585	-	-	STD	4	TL	-	1.50	618

STD: Standard



MAIN APPLICATION:
ATV



AT 108

AT 108 is an all-terrain tire suitable for ATVs. Its tread design provides excellent traction on loose surfaces.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)	
	Rec.	Alt.									bar	km/h
8" AT 20 X 7 - 8	5.5 AT	6.0 AT	170	508	-	-	STD	4	TL	-	bar	0.35
											km/h	88
											100	155
AT 22 X 11 - 8	9.0 AT	8.5 AT	277	560	-	-	STD	4	TL	-	bar	0.35
											km/h	136
											100	195
9" AT 22 X 10 - 9	8.0 AT	7.5 AT; 8.5 AT	10	22	-	-	STD	4	TL	-	bar	0.35
											km/h	136
											100	195
AT 22 X 11 - 9	9.0 AT	8.5 AT	275	557	-	-	STD	4	TL	-	bar	0.35
											km/h	155
											80	212
AT 22 X 11 - 9	9.0 AT	8.5 AT	275	557	-	-	STD	6	TL	-	bar	0.45
											km/h	180
											100	195
AT 25 X 12 - 9	9.5 AT	9.0 AT; 10.0 AT	292	640	-	-	STD	4	TL	-	bar	0.35
											km/h	195
											80	212
AT 25 X 13 - 9	10.5 AT	10.0 AT	320	635	-	-	STD	4	TL	-	bar	0.35
											km/h	212
											80	243
AT 25 X 13 - 9	10.5 AT	10.0 AT	320	635	-	-	STD	6	TL	-	bar	0.45
											km/h	243
											80	118
10" AT 20 X 10 - 10	8.0 AT	7.5 AT; 8.5 AT	250	514	-	-	STD	4	TL	-	bar	0.35
											km/h	118
											80	109
AT 22 X 8 - 10	6.5 AT	6.0 AT	206	557	-	-	STD	4	TL	-	bar	0.35
											km/h	109
											80	125
AT 22 X 8 - 10	6.5 AT	6.0 AT	206	557	-	-	STD	6	TL	-	bar	0.45
											km/h	125
											100	150
AT 22 X 11 - 10	9.0 AT	8.5 AT	270	564	-	-	STD	4	TL	-	bar	0.35
											km/h	150
											80	175
AT 22 X 11 - 10	9.0 AT	8.5 AT	270	564	-	-	STD	6	TL	-	bar	0.45
											km/h	175
											100	118
AT 23 X 8 - 10	6.5 AT	6.0 AT	210	594	-	-	STD	4	TL	-	bar	0.35
											km/h	118
											80	145
AT 23 X 10 - 10	8.0 AT	7.5 AT; 8.5 AT	259	594	-	-	STD	4	TL	-	bar	0.35
											km/h	145
											80	145

STD: Standard

Tolerances: O.D. ± 2% - S.W. ± 2% - RC ± 2.5%



MAIN APPLICATION:
ATV



AT 108

AT 108 is an all-terrain tire suitable for ATVs. Its tread design provides excellent traction on loose surfaces.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)		
	Rec.	Alt.									bar	km/h	
10"	AT 24 X 11 - 10	9.0 AT	8.5 AT	284	608	-	-	STD	4	TL	-	bar	0.35
												km/h	175
	24 X 11 - 10	9.0	-	284	608	-	-	STD	6	TL	-	bar	0.45
												km/h	200
10"	AT 25 X 12 - 10	9.5 AT	9.0 AT; 10.0 AT	298	630	-	-	STD	4	TL	-	bar	0.35
												km/h	195
	AT 25 X 12 - 10	9.5 AT	9.0 AT; 10.0 AT	298	630	-	-	STD	6	TL	-	bar	0.45
												km/h	224
11"	AT 22 X 7 - 11	5.5 AT	-	181	557	-	-	STD	4	TL	-	bar	0.35
												km/h	97.5
	AT 23 X 8 - 11	6.5 AT	6.0 AT	191	594	-	-	STD	4	TL	-	bar	0.35
												km/h	115
	AT 23 X 8 - 11	6.5 AT	6.0 AT	191	594	-	-	STD	6	TL	-	bar	0.45
												km/h	132
	AT 24 X 8 - 11	6.5 AT	6.0 AT	206	610	-	-	STD	4	TL	-	bar	0.35
												km/h	125
	AT 24 X 9 - 11	7.0 AT	7.5 AT	220	605	-	-	STD	4	TL	-	bar	0.35
												km/h	140
	AT 24 X 9 - 11	7.0 AT	7.5 AT	220	605	-	-	STD	6	TL	-	bar	0.45
												km/h	165
12"	AT 25 X 8 - 12	6.5 AT	6.0 AT	212	630	-	-	STD	4	TL	-	bar	0.35
												km/h	132
	AT 25 X 8 - 12	6.5 AT	6.0 AT	212	630	-	-	STD	6	TL	-	bar	0.45
												km/h	155
12"	AT 25 X 10 - 12	8.0 AT	6.5 AT; 7.5 AT; 8.5 AT	254	640	-	-	STD	4	TL	-	bar	0.35
												km/h	165
12"	AT 25 X 10 - 12	8.0 AT	6.5 AT; 7.5 AT; 8.5 AT	254	640	-	-	STD	6	TL	-	bar	0.45
												km/h	190

STD: Standard



MAIN APPLICATION:
ATV



AT 109

AT 109 is suitable for both all-terrain and lawn and garden applications with ATVs. AT 109 is the ideal tire on loose surfaces.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 80 KM/H	
	Rec.	Alt.									↓	
											bar	max load (kg)
6" AT 145 X 70 - 6	4.5		137	366	-	-	STD	2	TL	-	0.28	35
7" AT 16 X 8 - 7	6.5 AT	6.0 AT	183	419	-	-	STD	2	TL	-	0.21	52
8" AT 18 X 9.5 - 8	7.5 AT	8.0 AT	220	468	-	-	STD	2	TL	-	0.45	102
AT 20 X 7 - 8	5.5 AT	6.0 AT	170	504	-	-	STD	2	TL	-	0.45	100
AT 21 X 9 - 8	7.0 AT	6.5 AT; 7.5 AT	222	536	-	-	STD	2	TL	-	0.21	85
AT 22 X 11 - 8	9.0 AT	8.5 AT	230	579	-	-	STD	2	TL	-	0.21	112

STD: Standard



**MAIN APPLICATION:
ATV**



AT 110

AT 110 is suitable for both all-terrain and lawn and garden applications with ATVs. AT 110 is the ideal tire on loose surfaces.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)	
	Rec.	Alt.									↓	
8" AT 20 X 7 - 8	5.5 AT	6.0 AT	183	508	-	-	STD	4	TL	-	bar	0.35
											km/h	88
											100	88
9" AT 21 X 8 - 9	6.5 AT	6.0 AT	204	541	-	-	STD	4	TL	-	bar	0.35
											km/h	103
											80	103
10" AT 21 X 7 - 10	5.5 AT	6.0 AT	178	531	-	-	STD	4	TL	-	bar	0.35
											km/h	93
											100	93
AT 22 X 8 - 10	6.5 AT	6.0 AT	204	548	-	-	STD	4	TL	-	bar	0.35
											km/h	109
											80	109
AT 23 X 7 - 10	5.5 AT	6.0 AT	178	584	-	-	STD	4	TL	-	bar	0.35
											km/h	109
											100	109

STD: Standard



AT 111

AT 111 is suitable for all-terrain sport applications with ATVs. The tire is ideal for loose surfaces and provides excellent traction in all conditions.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)	
	Rec.	Alt.									↓	
8" AT 18 X 10 - 8	8.0 AT	7.5 AT; 8.5 AT	254	457	-	-	STD	2	TL	-	bar	0.25
											km/h	85
											80	85
AT 18 X 10 - 8	8.0 AT	7.5 AT; 8.5 AT	254	457	-	-	STD	4	TL	-	bar	0.35
											km/h	103
											100	103
AT 20 X 11 - 8	9.0 AT	8.5 AT	282	508	-	-	STD	6	TL	-	bar	0.45
											km/h	155
											80	155
AT 22 X 11 - 8	9.0 AT	8.5 AT	282	508	-	-	STD	6	TL	-	bar	0.45
											km/h	180
											100	180

STD: Standard



**MAIN APPLICATION:
ATV**



AT 111

AT 111 is suitable for all-terrain sport applications with ATVs. The tire is ideal for loose surfaces and provides excellent traction in all conditions.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)	
	Rec.	Alt.									↓	
											bar	km/h
9" AT 18 X 10 - 9	8.0 AT	7.5 AT; 8.5 AT	254	457	-	-	STD	4	TL	-	bar	0.35
											km/h	103
											100	103
AT 20 X 11 - 9	9.0 AT	8.5 AT	279	508	-	-	STD	4	TL	-	bar	0.35
											km/h	132
											80	132
AT 20 X 11 - 9	9.0 AT	8.5 AT	279	508	-	-	STD	6	TL	-	bar	0.45
											km/h	155
											100	155
AT 22 X 11 - 9	9.0 AT	8.5 AT	282	559	-	-	STD	4	TL	-	bar	0.35
											km/h	155
											80	155
AT 22 X 11 - 9	9.0 AT	8.5 AT	282	559	-	-	STD	6	TL	-	bar	0.45
											km/h	180
											100	180
10" AT 18 X 10 - 10	8.0 AT	7.5 AT; 8.5 AT	254	457	-	-	STD	4	TL	-	bar	0.35
											km/h	100
											100	100
AT 19 X 6 - 10	5.0	-	152	472	-	-	STD	4	TL	-	bar	0.95
											km/h	100
											80	100
20 X 6 - 10	5.0	-	152	500	-	-	STD	2	TL	-	bar	0.70
											km/h	90
											80	90
AT 20 X 6 - 10	5.0	-	152	500	-	-	STD	4	TL	-	bar	0.95
											km/h	105
											100	105
AT 20 X 11 - 10	9.0 AT	8.5 AT	275	508	-	-	STD	6	TL	-	bar	0.45
											km/h	150
											100	150
AT 21 X 7 - 10	5.5 AT	6.0 AT	178	541	-	-	STD	4	TL	-	bar	0.35
											km/h	93
											100	93
AT 21 X 7 - 10	5.5 AT	6.0 AT	178	541	-	-	STD	6	TL	-	bar	0.45
											km/h	106
											100	106
AT 22 X 7 - 10	5.5 AT	6.0 AT	175	559	-	-	STD	4	TL	-	bar	0.35
											km/h	100
											100	100
AT 22 X 11 - 10	9.0 AT	8.5 AT	282	559	-	-	STD	4	TL	-	bar	0.35
											km/h	150
											80	150
AT 22 X 11 - 10	9.0 AT	8.5 AT	282	559	-	-	STD	6	TL	-	bar	0.45
											km/h	175
											100	175

STD: Standard

Tolerances: O.D. ± 2% - S.W. ± 2% - RC ± 2.5%



MAIN APPLICATION:
ATV



AT 111

AT 111 is suitable for all-terrain sport applications with ATVs. The tire is ideal for loose surfaces and provides excellent traction in all conditions.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)	
	Rec.	Alt.									bar	km/h
10" AT 22 X 7 - 10	5.5 AT	6.0 AT	175	559	-	-	STD	6	TL	-	0.45	115
AT 22 X 8 - 10	6.5 AT	6.0 AT	208	559	-	-	STD	6	TL	-	0.45	125
AT 23 X 7 - 10	5.5 AT	6.0 AT	178	584	-	-	STD	4	TL	-	0.35	109
AT 23 X 7 - 10	5.5 AT	6.0 AT	178	584	-	-	STD	6	TL	-	0.45	125

STD: Standard



AT 111 HD

AT 111 HD is suitable for all-terrain sport applications with ATVs on loose surfaces. The increased tread depth and the thick sidewall provide extra grip and braking control in addition to extraordinary traction and high-speed control in power slides. AT 111 HD features outstanding sidewall protection and ensures an extended tire life-cycle.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)	
	Rec.	Alt.									bar	km/h
9" AT 20 X 11 - 9	9.0 AT	8.5 AT	275	515	-	-	HD	6	TL	-	0.45	155
AT 22 X 11 - 9	9.0 AT	8.5 AT	279	560	-	-	HD	6	TL	-	0.45	180
10" AT 20 X 11 - 10	9.0 AT	8.5 AT	279	505	-	-	HD	6	TL	-	0.45	150
AT 21 X 7 - 10	5.5 AT	6.0 AT	178	533	-	-	HD	6	TL	-	0.45	106

HD: Heavy Duty Version



MAIN APPLICATION:
ATV



AT 111 HD

AT 111 HD is suitable for all-terrain sport applications with ATVs on loose surfaces. The increased tread depth and the thick sidewall provide extra grip and braking control in addition to extraordinary traction and high-speed control in power slides. AT 111 HD features outstanding sidewall protection and ensures an extended tire life-cycle.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)	
	Rec.	Alt.									bar	km/h
10" AT 22 X 7 - 10	5.5 AT	6.0 AT	174	560	-	-	HD	6	TL	-	0.45	115
											0.45	175
AT 22 X 11 - 10	9.0 AT	8.5 AT	279	560	-	-	HD	6	TL	-	0.45	125
											0.45	125
AT 23 X 7 - 10	5.5 AT	6.0 AT	174	585	-	-	HD	6	TL	-	0.45	125
											0.45	125

STD: Standard



AT 119

AT 119 is an all-terrain tire suitable for ATVs. Its tread design provides excellent traction on loose surfaces.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY 80 KM/H	
	Rec.	Alt.									bar	max load (kg)
8" AT 22 X 11 - 8	9.0 AT	8.5 AT	280	580	-	-	STD	2	TL	-	0.25	125
AT 22 X 11 - 8	9.0 AT	8.5 AT	280	580	-	-	STD	4	TL	-	0.35	155

STD: Standard

Tolerances: O.D. ± 2% - S.W. ± 2% - RC ± 2.5%



MAIN APPLICATION:
GO KART



SM 48

SM 48 (GK) has been specially designed for go karts. Its smooth tread design provides excellent performance in sport activities. Shore A hardness 48.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)	
	Rec.	Alt.									↓	
5" 10 X 4.5 - 5	4.5	-	130	260	-	-	STD	-	TL	-	bar	4.00
											km/h	130
											-	-
11 X 7.10 - 5	6.75	-	190	295	-	-	STD	-	TL	-	bar	4.00
											km/h	135
											-	-

STD: Standard



SM 54 (L4S)

SM 54 (GK) has been specially designed for go karts. Its smooth tread design provides excellent performance in sport activities. Shore A hardness 54.



SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)	
	Rec.	Alt.									↓	
5" 10 X 4.5 - 5	4.5	-	130	260	-	-	STD	-	TL	-	bar	4.00
											km/h	130
											-	-
11 X 7.10 - 5	6.75	-	190	295	-	-	STD	-	TL	-	bar	4.00
											km/h	135
											-	-

STD: Standard



MAIN APPLICATION:
GO KART



SM 68

SM 68 has been specially designed for go karts. Its smooth tread design provides excellent performance in sport activities. Shore A hardness 68.




SIZE	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	TYPE	LI/SS	LOAD CAPACITY (KG/TIRE)	
	Rec.	Alt.									↓	
5" 10 X 4.5 - 5	4.5	-	130	260	-	-	STD	-	TL	-	bar	4.00
											km/h	130
											-	-
11 X 7.10 - 5	6.75	-	190	295	-	-	STD	-	TL	-	bar	4.00
											km/h	135
											-	-
11 X 6.00 - 5	6.75	-	185	290	-	-	STD	-	TL	-	bar	3.86
											km/h	135
											-	-

STD: Standard

READING YOUR TIRE

This section is intended for operators from the agricultural, industrial or earthmoving sectors. It contains useful information about specific Off-Highway tire features as well as some recommendations for maintenance and storage.

The main information about your tire can be found right on the tire. You just need to know how to read it.

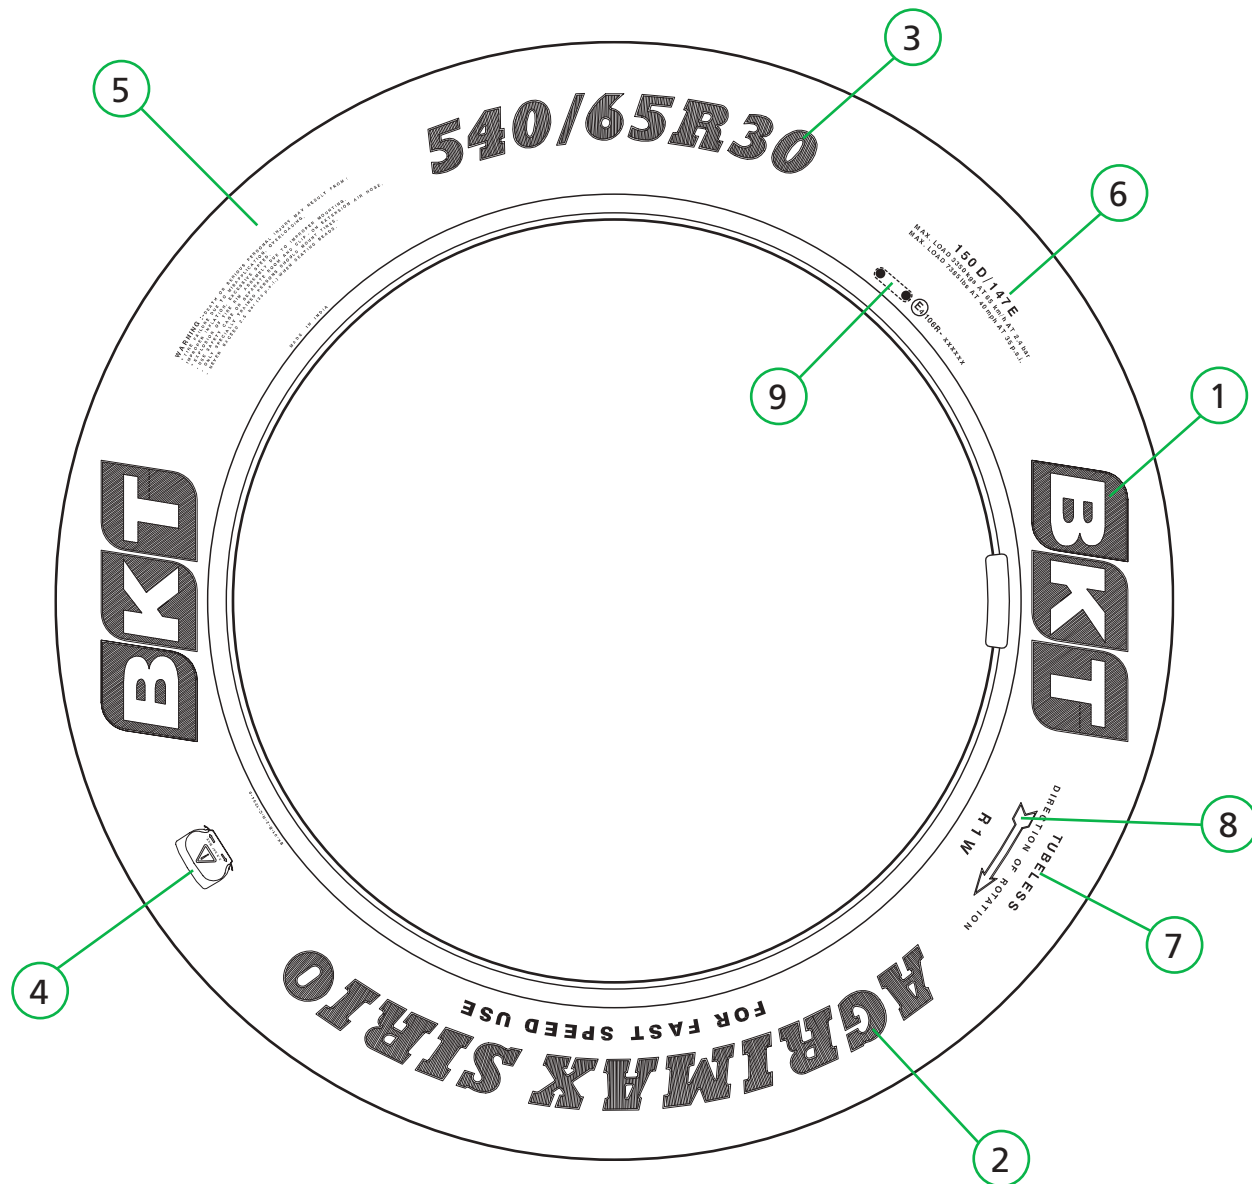

1	Brand Name
2	Sub brand name
3	Tire size
4	Safety symbol
5	Safety warning

6	Load & speed index Load, speed, pressure details
7	Type of tire
8	Direction of rotation
9	Weekly serial number



These are the main parameters for measuring a tire:

Overall Diameter - OD

This parameter is measured after the tire being properly mounted on the reference rim and inflated at the pressure recommended by the manufacturer for at least 24 hours without any load.

Section Width - SW

This parameter indicates the outer sidewall distance without taking into consideration the prominences due to tire code marking. The section width is measured after the tire being properly mounted on the reference rim and inflated at the pressure recommended by the manufacturer for at least 24 hours without any load.

Overall Width - OW

This parameter indicates a tire's section width at its largest point including all prominences such as tire code marking, sidewall lettering, tire brand, etc. The overall width is measured after the tire being properly mounted on the reference rim and inflated at the pressure recommended by the manufacturer for at least 24 hours without any load.

Section Height – SH

This parameter indicates the vertical section of the tire. It is calculated based on the overall diameter less the rim diameter divided by two.

Static Loaded Radius - SLR

This parameter indicates the vertical distance between the ground and the tire rotation axis. It is measured with the tire inflated at its nominal pressure, properly mounted on its reference rim at maximum load according to the values defined in the load index.

Static Loaded Width - SLW


This parameter indicates the outer distance between the tire sidewalls. It is measured with the tire inflated at its nominal pressure, properly mounted on its reference rim at maximum load according to the values defined in the load index.

Load Index

The load index is a numeric code that defines the tire's maximum loading capacity in kg. For each tire type/size, the loading capacity is always related to a specific inflation pressure as defined by ETRTO standards and manufacturer specifications.

Speed Code

The speed code is a symbol that indicates the maximum speed admitted at the given load index, following any other specific conditions defined by the tire manufacturer.

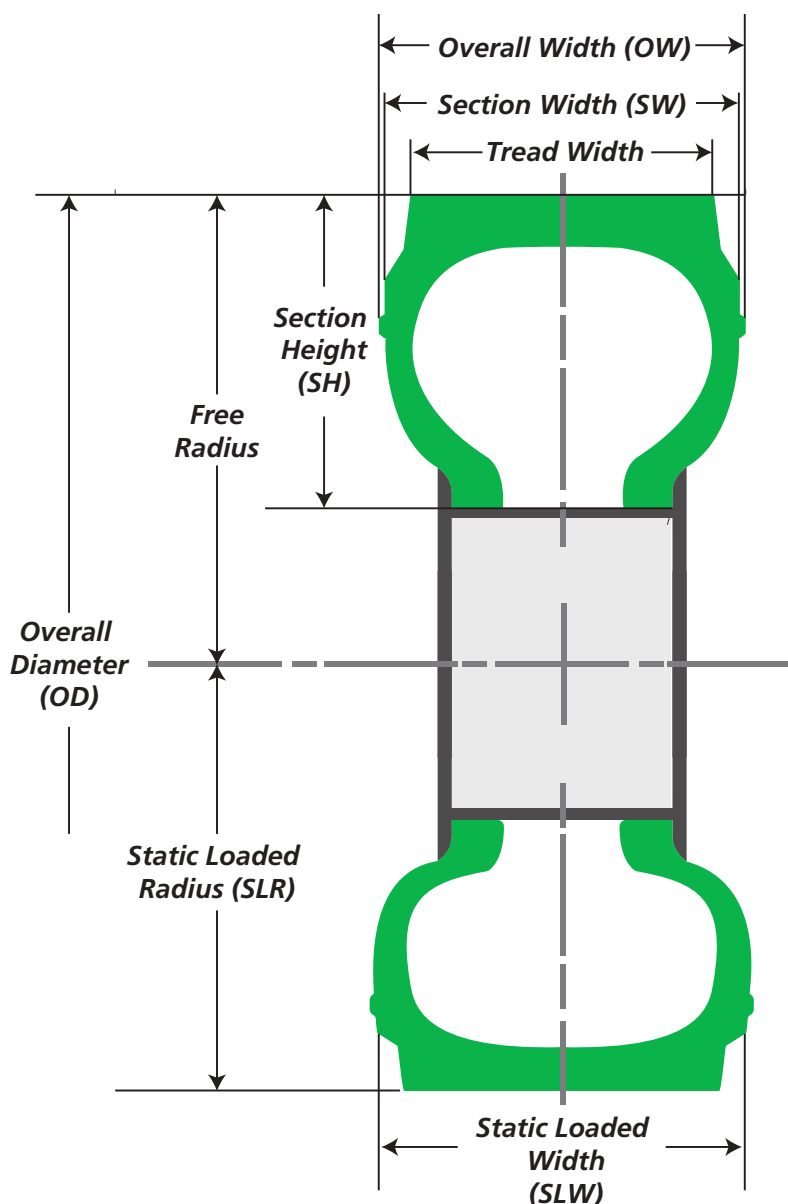



LOAD INDEX

LOAD INDEX	LOAD KG
50	190
51	195
52	200
53	206
54	212
55	218
56	224
57	230
58	236
59	243
60	250
61	257
62	265
63	272
64	280
65	290
66	300
67	307
68	315
69	325
70	335
71	345
72	355
73	365
74	375
75	387
76	400
77	412
78	425
79	437
80	450
81	462
82	475
83	487
84	500
85	515
86	530
87	545
88	560
89	580

LOAD INDEX	LOAD KG
90	600
91	615
92	630
93	650
94	670
95	690
96	710
97	730
98	750
99	775
100	800
101	825
102	850
103	875
104	900
105	925
106	950
107	975
108	1000
109	1030
110	1060
111	1090
112	1120
113	1150
114	1180
115	1215
116	1250
117	1285
118	1320
119	1360
120	1400
121	1450
122	1500
123	1550
124	1600
125	1650
126	1700
127	1750
128	1800
129	1850

LOAD INDEX	LOAD KG
130	1900
131	1950
132	2000
133	2060
134	2120
135	2180
136	2240
137	2300
138	2360
139	2430
140	2500
141	2575
142	2650
143	2725
144	2800
145	2900
146	3000
147	3075
148	3150
149	3250
150	3350
151	3450
152	3550
153	3650
154	3750
155	3875
156	4000
157	4125
158	4250
159	4375
160	4500
161	4625
162	4750
163	4875
164	5000
165	5150
166	5300
167	5450
168	5600



LOAD INDEX	LOAD KG
169	5800
170	6000
171	6150
172	6300
173	6500
174	6700
175	6900
176	7100
177	7300
178	7500
179	7750
180	8000
181	8250
182	8500
183	8750
184	9000
185	9250

LOAD INDEX	LOAD KG
186	9500
187	9750
188	10000
189	10300
190	10600
191	10900
192	11200
193	11500
194	11800
195	12150
196	12500
197	12850
198	13200
199	13600
200	14000
201	14500
202	15000

LOAD INDEX	LOAD KG
203	15500
204	16000
205	16500
206	17000
207	17500
208	18000
209	18500
210	19000
211	19500
212	20000
213	20600
214	21200
215	21800
216	22400
217	23000
218	23600
219	24300

SPEED SYMBOL

SPEED SYMBOL	A 2	A 4	A 6	A 8	B	C	D	E	F	G	J	K
SPEED Km/h	10	20	30	40	50	60	65	70	80	90	100	110



CONVERSION TABLE

RIM DIAMETER (inches)	SIZE (inches)	STANDARD								ROW CROP		SRI		
		SERIE 85	SERIE 80	SERIE 75	SERIE 70	SERIE 65	SERIE 60	SERIE 55	SERIE 50	SIZE (inches)	SERIE 90-95 METRIC			
		METRIC MARKING												
16	6.00 - 16				200/70 R16								330	
					220/70 R16 (4)								330	
					240/70 R16								350	
					260/70 R16			280/65 R16				-	180/95 R16	360
					280/70 R16			320/65 R16				-	210/95 R16	390
18	7.50 - 18				280/70 R18						-	210/95 R18	410	
					260/70 R20								410	
20	7.50 - 20				280/70 R20						-	210/90 R20	425	
	9.5 - 20	250/85 R20	260/80 R20		300/70 R20						-	210/95 R20	450	
	11.2 - 20	280/85 R20			320/70 R20							475		
	12.4 - 20	320/85 R20	340/80 R20	340/75 R20	360/70 R20								500	
		250/85 R24			300/70 R24						-	210/90 R24	500	
13.6 - 20			380/75R20	380/70 R20								525		
	280/85 R24	300/80R24		320/70 R24								525		
24	8.3 - 24	280/85 R20			320/70 R20							475		
	9.5 - 24	320/85 R20	340/80 R20	340/75 R20	360/70 R20							500		
		250/85 R24			300/70 R24						-	210/90 R24	500	
	11.2 - 24			380/75R20	380/70 R20							525		
		280/85 R24	300/80R24		320/70 R24							525		
	12.4 - 24	320/85 R24	340/80R24		360/70 R24						-	210/95 R28	550	
		250/85 R28											550	
	13.6 - 24	340/85 R24			380/70 R24								575	
					400/70 R24								575	
		280/85 R28			320/70 R28						8.3 R32	210/95 R32	575	
380/85 R24		400/80R24		420/70 R24						9.5 R32	230/95 R32	600		
14.9 - 24	320/85 R28			360/70 R28								600		
	420/85 R24			480/70 R24								625		
	340/85 R28			380/70 R28								625		
				480/60 R28								625		
26	16.9 - 26	380/85 R28	400/80R28		420/70 R28							650		
		320/85 R32			480/65 R28							650		
					520/60 R28							650		
	18.4 - 26				480/70 R26								650	
		460/85 R26 (4)			520/70 R26							750/50 R26	675	
		420/85 R28	440/80R28		580/70 R26								675	
		380/85 R30			480/70 R28								675	
		320/85R34			420/70 R30								675	
	23.1 - 26 28 - L26												750	
					620/75 R26	650/70 R26	750/65 R26					1000/50R25	750	
						600/70 R30 (1)		710/60R30 (2)	750/55R30				750	
							600/65 R32						750	
420/85 R34		440/80 R34	480/75R34	480/70 R34	540/65 R34							750		
340/85 R38			400/75 R38									750		
300/85 R42											9.5 R44	230/95 R44	750	
28	9.5 - 28	320/85 R24	340/80R24		360/70 R24							550		
		250/85 R28			420/65 R24							210/95 R28	550	
		340/85 R24			340/65 R28								575	
	11.2 - 28				400/70 R24								575	
					320/70 R28						8.3 R32	210/95 R32	575	
		380/85 R24	400/80R24		420/70 R24						9.5 R32	230/95 R32	600	
	12.4 - 28	320/85 R28			360/70 R28								600	
		420/85 R24			480/70 R24								625	
		340/85 R28			380/70 R28								625	
	13.6 - 28				480/60 R28								625	
					480/70 R26						11.2 R32	270/95 R32	625	
		380/85 R28	400/80R28		540/65 R26								650	
	14.9 - 28	320/85 R32			520/60 R28								650	
											9.5 R36	230/95 R36	650	
													675	
16.9 - 28				520/70 R26							750/50 R26	675		
	460/85 R26 (4)			580/70 R26								675		
	420/85 R28	440/80R28		480/70 R28								675		
	380/85 R30			420/70 R30								675		
	320/85R34											675		

Bold sizes: available in BKT

(1) also IF technology
(2) only IF technology

(3) also VF technology
(4) in development

For R2 type sizes please check SRI values on data book.

CONVERSION TABLE

RIM DIAMETER (inches)	STANDARD									ROW CROP		SRI	
	SIZE (inc hes)	SERIE 85	SERIE 80	SERIE 75	SERIE 70	SERIE 65	SERIE 60	SERIE 55	SERIE 50	SIZE (inches)	SERIE 90-95 METRIC		
													METRIC MARKING
30	14.9 - 30				520/70 R26					750/50 R26		675	
		460/85 R26 (4)			580/70 R26							675	
		420/85 R28	440/80R28		480/70 R28	540/65 R28	600/60 R28				11.2 R36	270/95 R36	675
		380/85 R30			420/70 R30						9.5 R38	230/95 R38	675
		320/85R34											700
	16.9 - 30				540/75R28		600/65R28						700
		420/85 R30	440/80 R30		480/70 R30	540/65 R30	600/60 R30				11.2 R38	270/95 R38	700
		320/85 R36											725
	18.4 - 30					600/70 R28 (2)							725
		460/85 R30	480/80 R30		520/70 R30	600/65 R30		710/55 R30					725
		380/85R34											725
		340/85 R36									9.5 R42	230/95 R42	725
	23.1 - 30				620/75 R30	650/70 R30	710/65R30				12.4 R42	320/90 R42	800
					540/75R34	600/70R34					11.2 R46	270/95 R46	800
		420/85 R38			480/70 R38	540/65 R38	600/60 R38				9.5 R48	230/95 R48	800
32	8.3 - 32	340/85 R24			380/70 R24	440/65 R24						575	
					400/70 R24							575	
		280/85 R28			320/70 R28					8.3 R32	210/95 R32	575	
	9.5 - 32	420/85 R24			480/70 R24	540/65 R24							625
		340/85 R28			380/70 R28	440/65 R28	480/60 R28			11.2 R32	270/95 R32	625	
	12.4 - 32				480/70 R26	540/65 R26							650
		380/85 R28	400/80R28		420/70 R28	480/65 R28	520/60 R28						650
		320/85 R32								9.5 R36	230/95R36	650	
	24.5 - 32				650/75 R32	680/70 R32		800/60 R32					825
					620/75 R34		650/65 R34 (2)	710/60 R34 (2)			12.4 R46	320/90 R46	825
		460/85 R38	480/80R38	520/75R38	520/70 R38	600/65 R38				12.4 R46	300/95 R46	825	
		340/85 R46								11.2 R48	270/95 R48	825	
	30.5 - L32				680/75 R32		800/65 R32		900/55 R32	1050/50R32			875
					710/75 R32								875
					650/75 R34	680/70 R34	750/65 R34						875
		520/85 R38			580/70 R38	650/65 R38	710/60 R38						875
				620/70 R38 (4)								875	
460/85 R42		480/80 R42			600/65 R42							875	
		420/80R46							14.9 R46	380/90 R46 (3)	875		
340/85 R48								12.4 R50	320/90 R50	875			
34	14.9 - 34				600/70 R28 (2)							725	
		460/85 R30	480/80 R30		520/70 R30	600/65 R30		710/55 R30				725	
		380/85R34										725	
		340/85 R36								9.5 R42	230/95 R42	725	
		320/85 R38							8.3 R44	210/95 R44	725		
	16.9 - 34									1000/50R25			750
					620/75 R26	650/70 R26	750/65 R26						750
						600/70 R30 (1)		710/60R30 (2)	750/55R30				750
		420/85 R34	440/80 R34	480/75R34	480/70 R34	540/65 R34							750
		340/85 R38		400/75 R38									750
	300/85 R42								9.5 R44	230/95 R44	750		
	18.4 - 34	460/85 R34	480/80R34	520/75 R34	520/70 R34	600/65 R34					11.2 R44	270/95 R44	775
		380/85 R38	380/80 R38										825
	23.1 - 34				650/75 R32	680/70 R32		800/60 R32					825
					620/75 R34		650/65 R34 (2)	710/60 R34 (2)			12.4 R46	320/90 R46	825
		460/85 R38	480/80R38	520/75R38	520/70 R38	600/65 R38				12.4 R46	300/95 R46	825	
340/85 R46									11.2 R48	270/95 R48	825		

Bold sizes: available in BKT

(1) also IF technology
(2) only IF technology

(3) also VF technology
(4) in development

For R2 type sizes please check SRI values on data book.

CONVERSION TABLE

RIM DIAMETER (inches)	SIZE (inches)	STANDARD								ROW CROP		SRI			
		SERIE 85	SERIE 80	SERIE 75	SERIE 70	SERIE 65	SERIE 60	SERIE 55	SERIE 50	SIZE (inches)	SERIE 90-95 METRIC				
		METRIC MARKING													
36	12.4 - 36			540/75R28		600/65R28						700			
		420/85 R30	440/80 R30		480/70 R30	540/65 R30	600/60 R30					700			
		320/85 R36								11.2 - 38	270/95 R38	700			
	13.6 - 36					600/70 R28 (2)							725		
		460/85 R30	480/80 R30		520/70 R30	600/65 R30		710/55 R30					725		
		380/85R34											725		
		340/85 R36									9.5 R42	230/95 R42	725		
		320/85 R38									8.3 R44	210/95 R44	725		
														725	
														725	
38	12.4 - 38				600/70 R28 (2)								725		
		460/85 R30	480/80 R30		520/70 R30	600/65 R30		710/55 R30					725		
		380/85R34												725	
		340/85 R36									9.5 R42	230/95 R42	725		
	13.6 - 38													725	
														750	
					620/75 R26	650/70 R26	750/65 R26				1000/50R25			750	
								710/60R30 (2)	750/55R30					750	
								600/65 R32						750	
		420/85 R34	440/80 R34	480/75R34	480/70 R34	540/65 R34								750	
		340/85 R38		400/75 R38								9.5 R44	230/95 R44	750	
		300/85 R42										9.5 R44	230/95 R44	750	
		14.9 - 38													775
			460/85 R34	480/80R34	520/75 R34	520/70 R34	600/65 R34								775
	380/85 R38		380/80 R38											800	
					620/75 R30	650/70 R30	710/65R30							800	
					540/75R34	600/70R34								800	
	420/85 R38					480/70 R38	540/65 R38	600/60 R38				9.5 R48	230/95 R48	800	
								800/60 R32						825	
	18.4 - 38														825
					620/75 R34		650/65 R34 (2)	710/60 R34 (2)						825	
		460/85 R38	480/80R38	520/75R38	520/70 R38	600/65 R38								825	
340/85 R46													825		
													875		
				680/75 R32		800/65 R32		900/55 R32	1050/50R32					875	
20.8 - 38				710/75 R32									875		
				650/75 R34	680/70 R34	750/65 R34							875		
	520/85 R38				580/70 R38	650/65 R38	710/60 R38						875		
													875		
													875		
	460/85 R42	480/80 R42			600/65 R42								875		
		420/80R46											875		
	340/85 R48										14.9 R46	380/90 R46 (3)	875		
											12.4 R50	320/90 R50	875		
	42	16.9 - 42			650/75 R32	680/70 R32		800/60 R32						825	
				620/75 R34		650/65 R34 (2)	710/60 R34 (2)						825		
460/85 R38			480/80R38	520/75R38	520/70 R38	600/65 R38							825		
18.4 - 42														825	
														875	
					680/75 R32		800/65 R32		900/55 R32	1050/50R32				875	
					710/75 R32									875	
					650/75 R34	680/70 R34	750/65 R34							875	
		520/85 R38				580/70 R38	650/65 R38	710/60 R38						875	
														875	
														875	
														875	
														875	
20.8 - 42														925	
					710/75R34	800/70R32		900/60R32						925	
					650/75R38	710/70R38								925	
	520/85 R42				580/70 R42	650/65 R42	710/60 R42		900/50 R42		12.4 R52	300/95 R52	925		
													925		
											11.2 R54	270/95 R54	925		
											12.4 R54	320/90 R54	925		
		480/80 R46										925			

Bold sizes: available in BKT (1) also IF technology (2) only IF technology (3) also VF technology (4) in development For R2 type sizes please check SRI values on data book.

CONVERSION TABLE

RIM DIAMETER (inches)	STANDARD									ROW CROP		SRI	
	SIZE (inches)	SERIE 85	SERIE 80	SERIE 75	SERIE 70	SERIE 65	SERIE 60	SERIE 55	SERIE 50	SIZE (inches)	SERIE 90-95 METRIC		
													METRIC MARKING
46	14.9 - 46			680/75 R32		800/65 R32		900/55 R32	1050/50R32			875	
				710/75 R32								875	
				650/75 R34	680/70 R34	750/65 R34						875	
		520/85 R38			580/70 R38	650/65 R38	710/60 R38					875	
					620/70 R38 (4)							875	
		460/85 R42	480/80 R42			600/65 R42						875	
			420/80R46								14.9 R46	380/90 R46 (3)	875
		340/85 R48									12.4 R50	320/90 R50	875
	18.8 - 46	680/85R32		710/75R34	800/70R32			900/60R32					925
				650/75R38	710/70R38								925
		520/85 R42			580/70 R42	650/65 R42	710/60 R42		900/50 R42	12.4 R52	300/95 R52	925	
					620/70 R42					11.2 R54	270/95 R54	925	
	20.8 - 46			480/80 R46							12.4 R54	320/90 R54	925
					800/75R32	900/70R32							975
		650/85 R38				800/70 R38		900/60 R38 (2)					975
					650/75R42	710/70 R42 (1)							975
520/85 R46					620/70 R46	650/65 R46						975	
			480/80R50							14.9 R50	380/90 R50	975	
48	13.6 -48			680/75 R32		800/65 R32		900/55 R32	1050/50R32			875	
				710/75 R32								875	
				650/75 R34	680/70 R34	750/65 R34						875	
		520/85 R38			580/70 R38	650/65 R38	710/60 R38					875	
					620/70 R38 (4)							875	
		460/85 R42	480/80 R42			600/65 R42						875	
			420/80R46							14.9 R46	380/90 R46 (3)	875	
		340/85 R48								12.4 R50	320/90 R50	875	
50	18.4 - 50			800/75R32	900/70R32							975	
		650/85R38			800/70R38		900/60 R38 (2)					975	
				650/75R42	710/70 R42 (1)							975	
		520/85 R46			620/70 R46	650/65 R46						975	
			480/80R50							14.9 R50	380/90 R50	975	
-			710/75 R42			900/60 R42 (2)					1025		

Bold sizes: available in BKT

(1) also IF technology
(2) only IF technology

(3) also VF technology
(4) in development

For R2 type sizes please check
SRI values on data book.

MOUNTING & DISMOUNTING

Whatever your field of application is - agriculture, construction, industry, or else - please be aware that both mounting and dismounting Off-Highway tires are hazardous operations. These must be performed by expert and qualified staff members only, using appropriate tools and procedures, as illustrated by the vehicle and machinery manufacturer.

Pressurized air used to inflate tires must always be controlled by means of an air pressure gauge.

Any non-compliance with the correct procedures may result in incorrect fitting of the tire on the rim and on the vehicle. This is a serious risk for the operator's safety.

Disclaimer of liability:

BKT does not undertake any responsibility in relation to the exactness or correctness of information or illustrations contained in this section. BKT declines any direct or indirect liability for any material damage or personal injury which might arise directly, indirectly or incidentally from the use of any information contained in this section. For any question in relation to specific operating issues always refer to the manufacturer of your vehicle or equipment.

MOUNTING PREPARATION

Before fitting the tire on the rim, make sure that the following mandatory aspects and requirements are met:

- Tire size and features must be suitable for the vehicle and the application to be used.
- The rime size to be used must be approved and contained in the BKT Technical Databook; it must be suitable for the tire size.
- Mounting and dismounting operations shall be performed by qualified and adequately trained technical staff or professionals only.
- Always refer to the instructions and procedures indicated by the rim, tire, and vehicle manufacturers.
- Use appropriate tools and equipment in good condition only.
- Using a wrong rim can limit the tire performance and cause its damage.

1 - Inspection and Cleaning

- Check the rim beforehand; use a metal brush to properly clean the entire surface and check its state.
- Never use rims with weld joints nor rims that are visibly deformed or damaged.
- The tire bead must be clean and without any elements that might cause an air lack.
- In case of mounting a tire that has already been used, accurately check both the tire's inside and outside for possible damages to be repaired.
- Do not mount tires with clear signs of strain.
- Use a compressor to clean and dry the inner part of the tire. Never use solvents.
- Check the tire beads and clean their surface with a dry cloth. Never use solvents.
- Only use new tubes (if applicable for the tire type) and new air valves (for tubeless tires).
- Do not use damaged or broken rims.
- The flange must be clean and smooth to ensure uniform adherence.
- Do not mount rims with worn surfaces.





2 - Inspection and Valve Mounting

- Place the rim on the mounting device.
- Before mounting the tire on the rim, check that the inflation valve functions properly.
- It is recommended to always use new valves at every mounting.



Valve inside



Valve outside

TIRE MOUNTING

1 - Lubrication of Tire Rim and Bead

- Use a soft-bristled brush to spread the lubricant over the surface.
- Use specific lubricants for tire mounting only.
- Do not use silicone or other solvent-based substances.



Rim



Tire beads

2 - Bead Positioning

- Place the tire bead on the rim channel.
- Make sure that at least part of the tire bead stays within the rim profile.
- The tire remains in position due to its weight and the ground contact during rim rotation.
- Start rotating the tire and position the tire bead gradually on the rim.
- Complete the rotation until the entire bead is positioned on the rim.
- Make sure that the entire bead is correctly fitted within the rim.



3 - Final Check

- Check that both tire beads are correctly positioned on the rim.
- Adjust the tire pressure according to manufacturer recommendations and the intended operating conditions.



TIRE LIFE & FAILURE

In several operating conditions, especially in agriculture, Off-Highway tires, need increased traction. Liquid ballasting can be useful to achieve major traction and higher adherence on the terrain as well as improved stability (lateral stiffness).

When filling the tire with liquid, it is recommended not to exceed 75% of its volume, in order to leave an air reserve of at least 25% of the tire volume. At any rate, it is important to inflate the tire at the pressure recommended by the manufacturer with reference to the loading conditions in order to maintain specific tire features such as elasticity.

In areas with a harsh climate, it is advised to add anti-freezing agents such as calcium chloride or magnesium chloride. It is highly recommended that these operations are carried out by a professional specialist only.


HANDLING & STORAGE

TIRE TRANSPORTATION

BKT tires are designed for the most differing applications in agriculture and manifold industrial sectors. Many Off-Highway tires are very heavy and difficult to be transported. Wrong transportation of a tire can cause serious damage. When transporting a tire, particular attention must be paid to make sure that neither the bead nor the inner part of the tire are damaged. Even the slightest damage of the bead can cause permanent damage due to air leakage resulting in tire underinflation and possible separation of the tire components.

In order to reduce the risk of damages or problems caused by wrong tire transportation or handling to a minimum, it is highly advised to observe the following recommendations:

- Do not lift the tire with a crane hook by leverage on the bead.
- Use large fibered straps, rubber slings or specific belts.
- Do not use ropes, steel slings or chains.
- Use a forklift for transport. The tire is to be lifted under the tread and not on the bead.

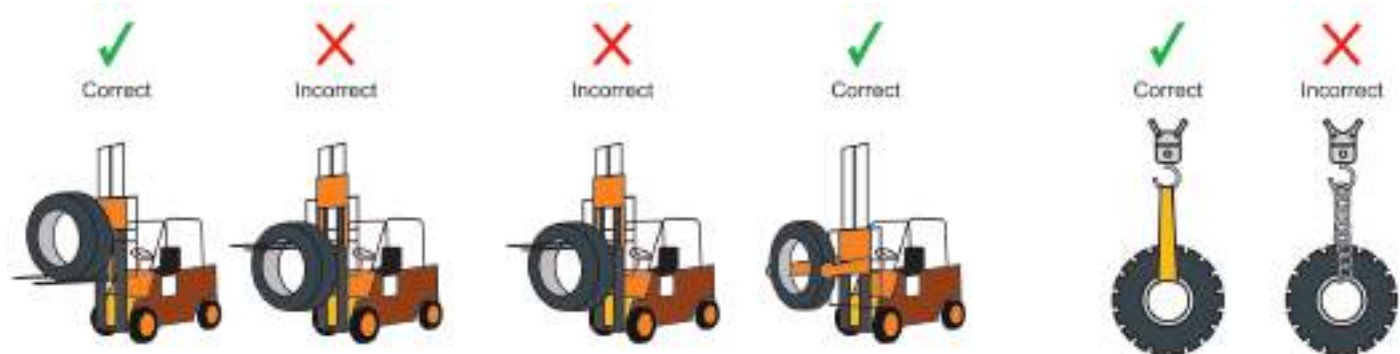



TIRE STORAGE

Whatever your field of application is – agriculture, earthmoving, industry, or else - Off-Highway tires are to be stored in a cool and dry place, away from direct sunlight, electric motors, oils, fuels, resins and other volatile substances in order to avoid any alteration of the chemical-physical features.

Should this not be possible, at least protect your tires with a waterproof tarpaulin to avoid contact with ultra-violet rays and bad weather.

Tires are to be placed vertically side by side. Do not stack one tire over the other horizontally.

Tubes and o-rings must be stocked in their original packing or stored unwrapped on racks or shelves, but never suspended.





20 horizontal lines for writing or drawing.





NOTES

Lined area for notes, consisting of 20 horizontal lines.

